


Prepared For:

VILLAGE OF ORLAND PARK
TOM MORGAN
15655 S Ravinia Ave.
Orland Park, IL 60462-4634
(708)403 - 6350
Reference ID: N9 SCR

Presented By:

RUSH TRK CTR OF N IL
William Hildreth
11816 S IL RTE 47
HUNTLEY IL 60142
847-669-5700

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

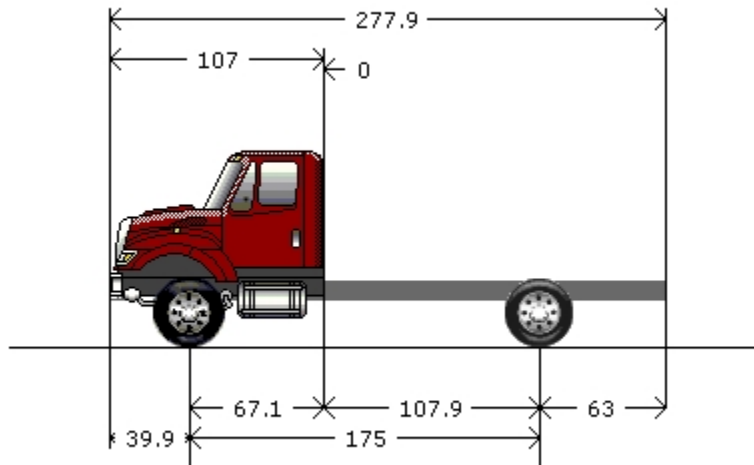

Model Profile
2016 7400 SBA 4X2 (SA625)

APPLICATION:

Construction Dump

MISSION:

Requested GVWR: 37780. Calc. GVWR: 37780
Calc. Start / Grade Ability: 31.86% / 3.06% @ 55 MPH
Calc. Geared Speed: 68.6 MPH

DIMENSION:

Wheelbase: 175.00, CA: 107.90, Axle to Frame: 63.00

ENGINE, DIESEL:

{Navistar N9} EPA 2010, SCR, 315 HP @ 2000 RPM, 950 lb-ft Torque @ 1200 RPM, 2200 RPM
Governed Speed, 315 Peak HP (Max)

TRANSMISSION, AUTOMATIC:

{Allison 3000_RDS_P} 5th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive;
On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW
& GCW Max.

CLUTCH:

Omit Item (Clutch & Control)

AXLE, FRONT NON-DRIVING:

{Meritor MFS-16-143A} Wide Track, I-Beam Type, 16,000-lb Capacity

AXLE, REAR, SINGLE:

{Dana Spicer S26-190} Single Reduction, 26,000-lb Capacity, R Wheel Ends Gear Ratio: 6.14

CAB:

Conventional

TIRE, FRONT:

(2) 12R22.5 G661 HSA (GOODYEAR) 484 rev/mile, load range H, 16 ply

TIRE, REAR:

(4) 12R22.5 G622 RSD (GOODYEAR) 482 rev/mile, load range H, 16 ply

SUSPENSION, RR, SPRING, SINGLE:

Vari-Rate; 31,000-lb Capacity, Includes 4500-lb Capacity Multileaf Auxiliary

PAINT:

Cab schematic 100GN

Location 1: 2303, Red (Std)

Chassis schematic N/A

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
Base Chassis, Model 7400 SBA 4X2 with 175.00 Wheelbase, 107.90 CA, and 63.00 Axle to Frame.	7200/3591	10791
FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.433" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL	176/367	543
BUMPER, FRONT Steel, Swept Back; Painted 0001 Canyon Black	0/0	0
FRAME EXTENSION, FRONT Integral; 20" In Front of Grille	139/-34	105
WHEELBASE RANGE 138" (350cm) Through and Including 187" (475cm)	0/0	0
AXLE, FRONT NON-DRIVING {Meritor MFS-16-143A} Wide Track, I-Beam Type, 16,000-lb Capacity	95/0	95
<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
SHOCK ABSORBERS, FRONT	47/0	47
SPRINGS, FRONT AUXILIARY Rubber	10/0	10
SUSPENSION, FRONT, SPRING Multileaf, Shackle Type; 16,000-lb Capacity; Less Shock Absorbers	235/1	236
<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free		
<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : DUST SHIELDS, FRONT BRAKE : DUST SHIELDS, REAR BRAKE : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE Bendix On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4		
<u>Notes</u> : Rear Axle is Limited to 23,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle/Suspension Ordered.		
BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 Sqn Long Stroke Brake Chambers	0/0	0
<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
TRAILER CONNECTIONS Four-Wheel, With Hand Control Valve and Tractor Protection Valve, for Straight Truck	2/0	2
AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel) With Automatic Traction Control	0/0	0
AIR DRYER {Bendix AD-IP} With Heater	21/4	25
<u>Includes</u>		

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
: AIR DRYER LOCATION Inside Left Rail, Back of Cab		
BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Spring Brake	0/0	0
BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn	0/0	0
SLACK ADJUSTERS, FRONT {Haldex} Automatic	6/0	6
SLACK ADJUSTERS, REAR {Haldex} Automatic	0/0	0
BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake	0/0	0
<u>Notes</u>		
: The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.		
AIR COMPRESSOR {Bendix Tu-Flo 550} 13.2 CFM Capacity	0/0	0
DRAIN VALVE (3) Petcocks; for Air Tanks	0/0	0
STEERING COLUMN Tilting	0/0	0
STEERING WHEEL 2-Spoke, 18" Diam., Black	0/0	0
STEERING GEAR {Sheppard M-110} Power	0/0	0
EXHAUST SYSTEM Switchback Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; Includes Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab	121/-18	103
TAIL PIPE (1) Turnback Type, Bright, for Single Exhaust	0/0	0
MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel	0/0	0
ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
<u>Includes</u>		
: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab		
: FUSES, ELECTRICAL SAE Blade-Type		
: HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover		
: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever		
: HEADLIGHTS (2) Sealed Beam, Round, with Chrome Plated Bezels		
: JUMP START STUD Located on Positive Terminal of Outermost Battery		
: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light		
: RUNNING LIGHT (2) Daytime, Included With Headlights		
: STARTER SWITCH Electric, Key Operated		
: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector		
: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature		
: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever		
: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted		
: WIRING, CHASSIS Color Coded and Continuously Numbered		
ALTERNATOR {Leece-Neville AVI160P2013} Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount, With Remote Sense	0/0	0
BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	2/0	2
BATTERY SYSTEM {International} Maintenance-Free (3) 12-Volt 2775CCA Total	49/14	63

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
2-WAY RADIO Wiring Effects; Wiring With 20 Amp Fuse Protection, Includes Ignition Wire With 5 Amp Fuse, Wire Ends Heat Shrink and Routed to Center of Header Console in Cab	1/0	1
RADIO {Panasonic CQ120} AM/FM, Includes Multiple Speakers, Includes Auxiliary Input	2/0	2
<u>Includes</u> : SPEAKERS IN CAB (2) Dual-Cone with Deluxe Interior : SPEAKERS IN CAB (4) Coaxial with Premium Interior		
AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications	2/0	2
TRAILER CONNECTION SOCKET 7-Way; Mounted at rear of Frame, Wired for Turn Signals Combined With Stop, Compatible With Trailers That Use Combined Stop, Tail, Turn Lamps	0/7	7
HORN, ELECTRIC Disc Style	0/0	0
BATTERY BOX Steel With Plastic Cover, 18" Wide, 2, 3, or 4 Battery Capacity, Mounted Right Side Back of Cab	-28/8	-20
HORN, AIR Black, Single Trumpet, Air Solenoid Operated	0/0	0
SWITCH, TOGGLE, FOR WORK LIGHT Lighted; on Instrument Panel and Wiring Effects for Customer Furnished Back of Cab Light	2/1	3
CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade	0/0	0
ENGINE SHUTDOWN Automatic; With 30 Second Delay, With International Engines	1/0	1
STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection	0/0	0
INDICATOR, LOW COOLANT LEVEL With Audible Alarm	0/0	0
TURN SIGNALS, FRONT LED, Includes LED Side Marker Lights, Mounted on Fender	0/0	0
INSULATION, UNDER HOOD for Sound Abatement	10/0	10
GRILLE Stationary, Chrome	0/0	0
INSULATION, SPLASH PANELS for Sound Abatement	2/0	2
FRONT END Tilting, Fiberglass, With Three Piece Construction; for 2007 & 2010 Emissions	0/0	0
PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GN"		
PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
CLUTCH Omit Item (Clutch & Control)	-63/-12	-75
ENGINE, DIESEL {Navistar N9} EPA 2010, SCR, 315 HP @ 2000 RPM, 950 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 315 Peak HP (Max)	0/0	0
<u>Includes</u> : AIR COMPRESSOR AIR SUPPLY LINE Naturally-Aspirated (Air Brake Chassis Only) : ANTI-FREEZE Red Shell Rotella Extended Life Coolant; -40 Degrees F/ -40 Degrees C; for MaxxForce and Navistar Engines : COLD STARTING EQUIPMENT Intake Manifold Electric Grid Heater with Engine ECM Control : CRUISE CONTROL Electronic; Controls Integral to Steering Wheel : ENGINE OIL DRAIN PLUG Magnetic : ENGINE SHUTDOWN Electric, Key Operated : FUEL FILTER Included with Fuel/Water Separator : FUEL/WATER SEPARATOR Fuel/Water Separator and Fuel Filter in a Single Assembly; With Water-in-Fuel Sensor; Engine Mounted		

DescriptionF/R Wt Tot Wt
(lbs) (lbs)

: GOVERNOR Electronic
: OIL FILTER, ENGINE Spin-On Type
: WET TYPE CYLINDER SLEEVES

FAN DRIVE {Horton Drivemaster Polar Extreme} Direct Drive Type, Two Speed, With Residual Torque Device for Disengaged Fan Speed

0/0 0

Includes

: FAN Nylon

RADIATOR Aluminum, Cross Flow, Series System; 1228 SqIn Core and 648 SqIn Charge Air Cooler and With Transmission Oil Cooler

0/0 0

FEDERAL EMISSIONS EPA, OBD and GHG Certified for Calendar Year 2015; N9 & N10 Engines

0/0 0

AIR CLEANER Single Element, with Integral Snow Valve and In-Cab Control

2/0 2

Includes

: GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted

THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel

0/0 0

ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls; With Ignition Switch Control for MaxxForce and Navistar post 2007 Emissions Electronic Engines

0/0 0

BLOCK HEATER, ENGINE {Phillips} 120 Volt/1250 Watt; With "Y" Cord From Socket in Standard Location, For a Dealer Installed Oil Pan Heater, With Extended Life Coated Metal/Plastic/Metal Material Oil Pan

4/0 4

Includes

: BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door

Notes

: MPM material is single sheet composite with two layers of sheet metal sandwiching plastic material. MPM material has electro-deposition prime coat with powder coating for the final finish coat.

EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Idle Regulations

0/0 0

TRANSMISSION, AUTOMATIC {Allison 3000_RDS_P} 5th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.

197/52 249

TRANSMISSION SHIFT CONTROL {Allison} Push-Button Type; for Allison 3000 & 4000 Series Transmission

0/0 0

TRANSMISSION DIPSTICK Relocated to Right Side of Transmission

0/0 0

TRANSMISSION OIL Synthetic; 29 thru 42 Pints

0/0 0

ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction

0/0 0

SHIFT CONTROL PARAMETERS Allison 3000 or 4000 Series Transmissions, 5th Generation Controls, Performance Programming

0/0 0

PTO CONTROL, DASH MOUNTED For Customer Provided PTO; Includes Switch, Electric/Air Solenoid, Piping and Wiring

3/0 3

AXLE, REAR, SINGLE {Dana Spicer S26-190} Single Reduction, 26,000-lb Capacity, R Wheel Ends . Gear Ratio: 6.14

0/369 369

Includes

: REAR AXLE DRAIN PLUG (1) Magnetic, For Single Rear Axle

Notes

: The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
: When Specifying Axle Ratio, Check Performance Guidelines and TCAPE for Startability and Performance		
SUSPENSION, RR, SPRING, SINGLE Vari-Rate; 31,000-lb Capacity, Includes 4500-lb Capacity Multileaf Auxiliary	0/88	88
<u>Notes</u>		
: The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.		
AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 30 thru 39.99 Pints	0/0	0
FUEL TANK STRAPS Bright Finish Stainless Steel	0/0	0
FUEL/WATER SEPARATOR with Thermostatic Fuel Temperature Controlled Electric Heater, and Filter Restriction/Change Indicator, Includes Standard Equipment Water-in-Fuel Sensor	5/0	5
FUEL TANK Top Draw; D Style, Non Polished Aluminum, 19" Deep, 50 U.S. Gal., 189 L Capacity, with Quick Connect Outlet, Mounted Left Side, Under Cab	6/3	9
DEF TANK 7 U.S. Gal. 26.5L Capacity, Frame Mounted Outside Left Rail, Under Cab	0/0	0
CAB Conventional	0/0	0
<u>Includes</u>		
: ARM REST (2) Molded Plastic; One Each Door		
: COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window		
: CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel		
: DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted		
: GLASS, ALL WINDOWS Tinted		
: GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side		
: GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side		
: INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color		
: STEP (4) Two Steps Per Door		
HEATER SHUT-OFF VALVES (1) Ball Check Valve Type, Supply Line	5/0	5
GRAB HANDLE, CAB INTERIOR (2) Safety Yellow	0/0	0
GAUGE CLUSTER English With English Electronic Speedometer	0/0	0
<u>Includes</u>		
: GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level		
: ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout		
: WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)		
GAUGE, OIL TEMP, ALLISON TRAN	1/0	1
GAUGE, AIR APPLICATION	1/0	1
GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} With Black Bezel Mounted in Instrument Panel	2/0	2
IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
GAUGE, DEF FLUID LEVEL	0/0	0
SEAT, DRIVER {National 2000} Air Suspension, High Back With Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, With 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust	27/12	39
<u>Includes</u>		
: SEAT BELT 3-Point, Lap and Shoulder Belt Type		

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
MIRROR, CONVEX, HOOD MOUNTED {Lang Mekra} Right and Left Side; 7.44" Sq., Bright	11/0	11
GRAB HANDLE Chrome; Towel Bar Type With Anti-Slip Rubber Inserts; for Cab Entry Mounted Left Side Only at "B" Pillar	3/0	3
SEAT, PASSENGER {National} Non Suspension, High Back, Fixed Back, Integral Headrest, Vinyl	15/8	23
MIRRORS (2) {Lang Mekra} Rectangular, Power Both Sides, Thermostatically Controlled Heated Heads, LED Clearance Lights, Bright Finish Heads and Arms, with Black Brackets, Breakaway Type, 7.55" x 14.1" Integral Convex Both Sides, 102" Inside Spacing	0/0	0
SEAT BELT All Orange; 1 to 3	0/0	0
WINDSHIELD Heated, Single Piece	0/0	0
ARM REST, RIGHT, DRIVER SEAT	3/0	3
AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster	42/5	47
<u>Includes</u>		
: HEATER HOSES Premium		
: HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps		
: REFRIGERANT Hydrofluorocarbon HFC-134A		
CAB SOUND INSULATION Includes Dash Insulator and Engine Cover Insulator	12/0	12
<u>Notes</u>		
: Feature included with CAB INTERIOR TRIM, Premium		
INSTRUMENT PANEL Center Section, Flat Panel	0/0	0
HVAC FRESH AIR FILTER	0/0	0
STORAGE POCKET, DOOR Molded Plastic, Full Width; Mounted on Passenger Door	0/0	0
CAB INTERIOR TRIM Deluxe	0/0	0
<u>Includes</u>		
: "A" PILLAR COVER Molded Plastic		
: CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering		
: CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets and CB Radio Pocket		
: DOOR TRIM PANELS Molded Plastic; Driver and Passenger Doors		
: FLOOR COVERING Rubber, Black		
: HEADLINER Soft Padded Cloth		
: INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section		
: STORAGE POCKET, DOOR (1) Molded Plastic, Full-Length; Driver Door		
: SUN VISOR (2) Padded Vinyl with Driver Side Toll Ticket Strap, Integral to Console		
CAB REAR SUSPENSION Air Bag Type	0/0	0
WINDSHIELD WIPER BLADES Snow Type	2/0	2
COWL TRAY LID	7/4	11
WHEEL, SPARE, DISC 22.5" Painted Steel, 10-Stud (285.75MM BC Hub Piloted) 9.00 DC Rim	0/108	108
WHEELS, FRONT DISC; 22.5" Painted Steel, 5-Hand Hole, 10-Stud (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 9.00 DC Rims; With Steel Hubs.	69/0	69

Includes

: PAINT IDENTITY, FRONT WHEELS White

Notes

Description

F/R Wt **Tot Wt**
 (lbs) (lbs)

: Compatible Tire Sizes: 12R22.5, 295/75R22.5, 295/80R22.5, 315/80R22.5

 WHEELS, REAR {Accuride} DUAL DISC; 22.5" Painted Steel, 5-Hand Hole, 10-Stud (285.75MM BC) Hub
 Piloted, Flanged Nut, Metric Mount, 8.25 DC Rims; With .472" Thick Increased Capacity Disc and Steel Hubs

0/12 12

Includes

: PAINT IDENTITY, REAR WHEELS White

Notes

: Compatible Tire Sizes: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5

WHEEL SEALS, REAR {Stemco Voyager} Oil Lubricated Wheel Bearings

0/0 0

WHEEL SEALS, FRONT {Stemco Voyager} Oil Lubricated Wheel Bearings ILO Standard Oil Seals

0/0 0

WHEEL BEARING, FRONT, LUBE {EmGard FE-75W-90} Synthetic Oil

0/0 0

(4) TIRE, REAR 12R22.5 G622 RSD (GOODYEAR) 482 rev/mile, load range H, 16 ply

0/72 72

(2) TIRE, FRONT 12R22.5 G661 HSA (GOODYEAR) 484 rev/mile, load range H, 16 ply

38/0 38

Cab schematic 100GN

Location 1: 2303, Red (Std)

Chassis schematic N/A

Services Section:

WARRANTY Standard for WorkStar 7300/7400 (4x2, 4x4, 6x4, 6x6), Effective with Vehicles Built January 2, 2015 or Later, CTS-2002U

0/0 0

Total Component Weight:

8487/4662 13149

Dealer Doc Fee

0/0 0

Total Goods Purchased:

0/0 0

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Factory List Prices:		
Product Items	\$118,848.00	
Service Items	\$0.00	
Total Factory List Price Including Options:		\$118,848.00
Total Goods Purchased:		\$164.00
Title and Registration Fee	\$105.00	
Illinois Safety Sticker	\$75.00	
Total Preparation And Delivery:		\$180.00
Freight	\$2,200.00	
Total Freight:		\$2,200.00
Total Factory List Price Including Freight:		\$121,392.00
Less Customer Allowance:		(\$41,290.00)
Total Vehicle Price:		\$80,102.00
Total Sale Price:		\$80,102.00
Total Per Vehicle Sales Price:		\$80,102.00
Net Sales Price:		\$80,102.00

PRICE INCLUDES ILLINOIS TITLE FEE, ILLINOIS MUNICIPAL PLATES, and ILLINOIS SAFETY STICKER

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without
Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.