


- GENERAL NOTES**
- PROVIDE STONE SPLASH BLOCKS AT ALL DOWNSPOUTS WHICH SPILL ONTO GRADE.
 - ALL TRIM BOARDS TO BE FIBER CEMENT UNLESS OTHERWISE NOTED.
 - USE 5/4 X 12 FRIEZE AT SIDING.
 - USE 1 X 12 FRIEZE AT BRICK / DECORATIVE CMU.

5' EXPOSURE SIDING	LAP SIDING PER SECTION 07462
7' EXPOSURE SHAKE SIDING	SHINGLE SIDING PER SECTION 07462

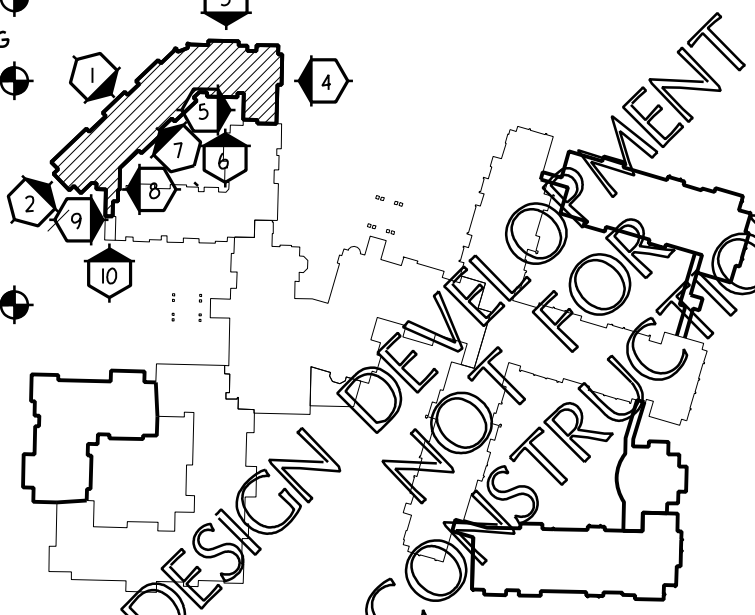

1614 UNDERWOOD AVE.
 WAUWATOSA, WI 53213
 414.431.3131 TEL
 414.431.6521 FAX
 WWW.A2ARCH.COM

Architecture
 Engineering
 Planning

REVISIONS

DRAWN BY
 DATE
 18 DEC 2009
 PROJECT
 070601
 SHEET NO.