


FUEL FACILITY -  
LED (GA)  
NO SCALE

PLAN NOTES:


- ① NEW POLE AND FIXTURE(S).
- ② EXISTING FIXTURE TO REMAIN.
- ③ E.C. TO PROVIDE NEW (60) FIXTURES AT EXPANDED FUEL FACILITY CANOPY.
- ④ EXISTING POLE AND FIXTURES TO BE REMOVED AND RELOCATED. DEMO EXISTING BASE. PROVIDE BASE AT NEW LOCATION. RE USE EXISTING FIXTURE AND ORIENT AS SHOWN. PROVIDE HEAVY DUTY TRAFFIC RATED J-BOX AT EXISTING LOCATION. RE WIRE AS SHOWN. FIELD VERIFY.

STATISTICS	
AVERAGE	3.7
MAXIMUM	4.8
MINIMUM	2.4
MAX/MIN	2.01
AVERAGE/MIN	1.51

LIGHTING FIXTURE SCHEDULE							
TYPE	MANUFACTURER	NUMBER	LAMPS	MOUNT	WATT	REMARKS	COLOR
⑤	CREZ	CPY250-C-PD-13L-UL-WH-5700K	LED	PENDANT	86	PANT CONDUIT & J-BOX WHITE. BOTTOM OF FIXTURES AT -15" A.F.F. PROVIDE MOUNTING ACCESSORIES (SWAGS). PROVIDE SAFETY CHAIN TO BUILDING STRUCTURE.	5700K
⑥	COOPER	GLEON-AF-06-LED-E1-SWQ-7050	LED	POLE	333	-30' OR -22' POLE ON 2'-6" CONCRETE BASE. ROUND TAPERED POLE. NUMBER OF HEADS SHALL BE PER PLAN. SEE DETAIL SHEET SE-1.	5000K
⑦	COOPER	GLEON-AF-06-LED-E1-TAW-7050	LED	POLE	333		5000K
⑧	COOPER	GLEON-AF-06-LED-E1-SWQ-7050	LED	POLE	113	-15' POLE ON 2'-6" CONCRETE BASE. ROUND TAPERED POLE. NUMBER OF HEADS SHALL BE PER PLAN. SEE DETAIL SHEET SE-1.	5000K
⑨	COOPER	GALN-SABB-U-750-SWQ	LED	POLE	325	-30' OR -22' POLE ON 2'-6" CONCRETE BASE. ROUND TAPERED POLE. NUMBER OF HEADS SHALL BE PER PLAN. SEE DETAIL SHEET SE-1.	5000K
⑩	COOPER	GALN-SABB-U-750-SL3 HSS	LED	POLE	325		5000K
⑪	COOPER	GALN-SABB-U-750-SL4 HSS	LED	POLE	325		5000K

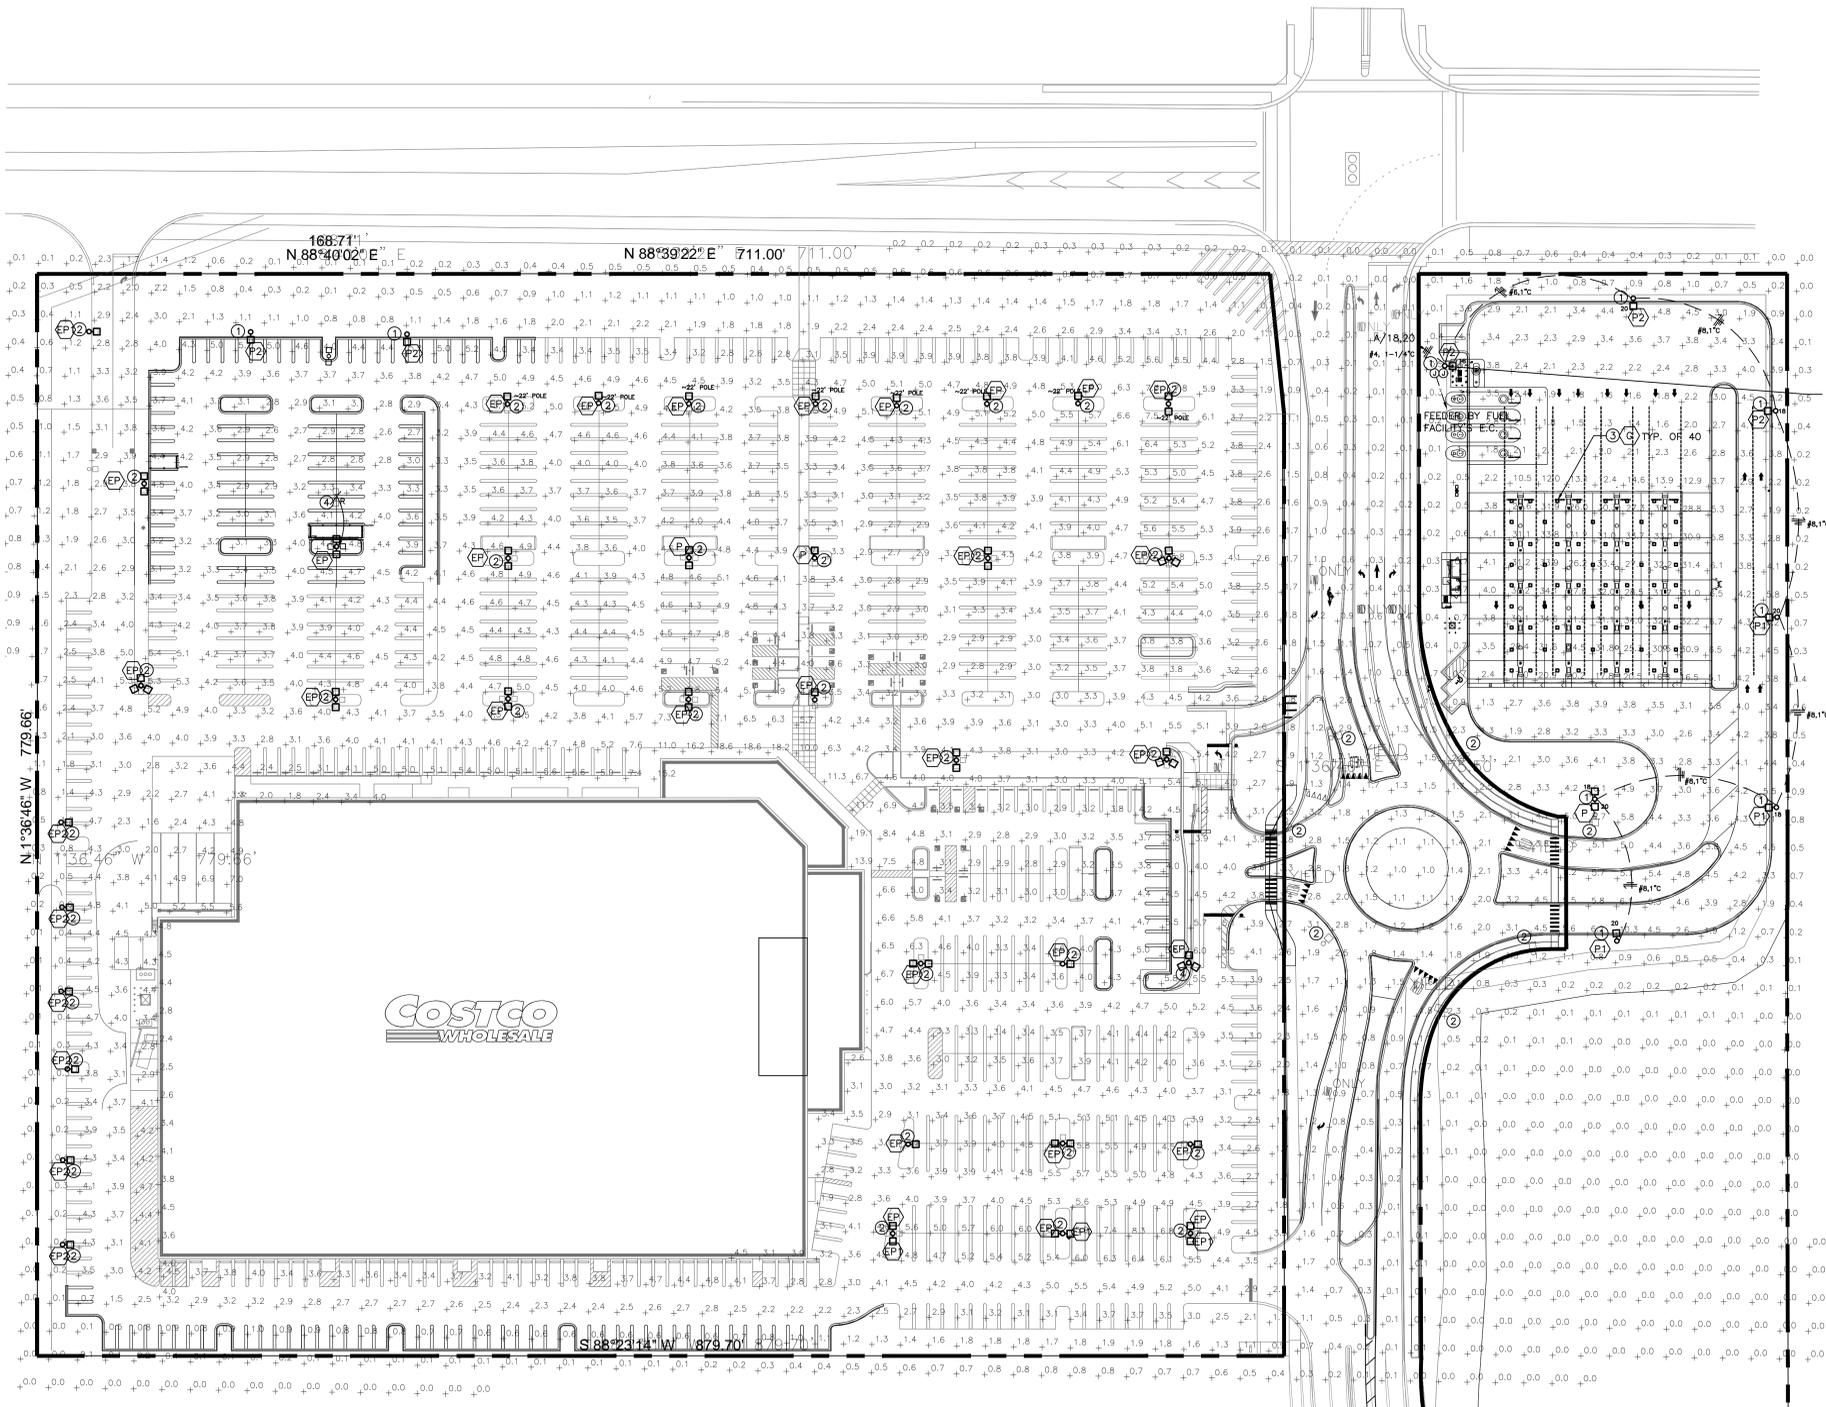

FUEL FACILITY LIGHT W/ SECURITY CAMERA. E.C. TO PROVIDE AND INSTALL POLE & FIXTURE. SEAL CONDUITS AT (2) UNDERGROUND-RECESSED J-BOXES NEXT TO POLE BASE AND RUN (2) 1" FROM J-BOXES INTO POLE SHAFT AT HANDHOLE'S HEIGHT. WIRING AND CONTROL ARE BY FUEL FACILITY'S E.C.

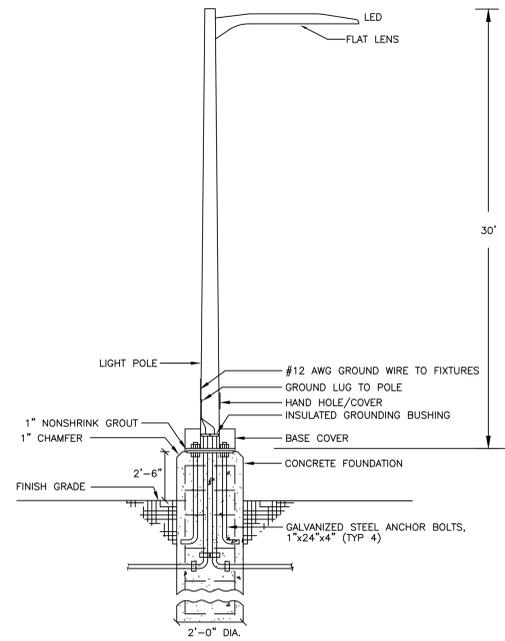

NOTE: PROVIDE CONCRETE J-BOX AS REQUIRED. THIS DETAIL IS FOR ELECTRICAL CONDUITS ROUTING ONLY. SEE STRUCTURAL DRAWINGS FOR CONSTRUCTION DETAIL.

POLE BASE DETAIL  
NO SCALE

SITE LIGHTING PLAN  
SCALE: 1" = 60'-0"

FOR QA REVIEW, NOT FOR CONSTRUCTION  
 CHECKED: JGM/ANT  
 DRAWN: NV/EB  
 IDPFR # 184005536  
 EXP: 04/30/2025  
 REVISION DATE:  
 ISSUE DATE: JANUARY 2024  
 ARCHITECT REFERENCE NO: 03-1462  
 NO PART OF THIS DOCUMENT MAY BE USED OR COPIED IN WHOLE OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF T.E.I.N.C.  
 PROJECT NO: 24-087  
 SITE ELECTRICAL PLAN, DETAIL, LIGHTING FIXTURE SCHEDULES, NOTES  
 T.E. Inc. of WA  
 830 N. RIVERSIDE DRIVE  
 SUITE #200  
 PHOENIX, AZ 85007  
 PHONE: 485-970-9763  
 FAX: 485-970-9766  
 FUEL FACILITY OSR - PARKING EXPANSION  
 WAREHOUSE #647  
 9915 W 159TH STREET  
 ORLAND PARK, IL 60467  
 COSTCO WHOLESALE

# CPY Series - Version C

CPY250® LED Canopy/Soffit Luminaire

Rev. Date: V801/16/2025

## Product Description

The CPY250® LED Canopy/Soffit Luminaire has an extremely thin profile constructed of rugged cast aluminum. It can be surface mounted easily from below the canopy deck and can be pendant mounted. Direct imaging of the LEDs is eliminated with a highly efficient patterned flat or 0.91" (23mm) drop glass lens.

**Applications:** Petroleum canopies, CNG fueling stations, soffits

## Performance Summary

Assembled in the USA by Cree Lighting from US and imported parts

**Initial Delivered Lumens:** Up to 21,000

**Efficacy:** Up to 165 LPW

**CRI:** Minimum 70 CRI (40K, 50K, 57K); 80 CRI (30K); 90 CRI (40K, 50K)

**CCT:** 3000K, 4000K, 5000K, 5700K

**Limited Warranty\*:** 10 years for luminaire/10 years for Colorfast DeltaGuard® finish/5 years for BML sensor/up to 5 years for Synapse® accessories/1 year for field-installed accessories

IP66 Rated (select models only)

Class I, Division 2 Hazardous Location for select models

\* See <https://www.creelighting.com/resources/warranties/> for warranty terms. For Synapse accessories, consult Synapse spec sheets for details on warranty terms.

## Accessories

Field-Installed	
<b>Direct Mount Luminaires</b>	
<b>Canopy Upgrade Kits (18 ga. steel, except where noted)</b>	
CPY-AP304* - for use with Cree Lighting CAN-304 luminaires, 16 ga. 5052 aluminum	
XA-BXCCM+ - for use with Jet-Philips, 21.60" [549mm] square	
XA-BXCCN+ - for use with Elco Franciscan, 22.06" [560mm] square	
XA-BXCCP+ - for use with LSI Dakota or Masters, 22.50" [572mm] square	
XA-BXCCQ+ - for use with Whiteway Riviera or Rig-A-Lite, 20.60" [523mm] square	
XA-BXCCR+ - for use with Elco Merrit, 18.06" [459mm] square	
XA-BXCCS+ - for use with LSI Richmond or Whiteway Civic, 23.00" [584mm] L x 13.00" [330mm] W	
<b>Direct Mount Junction Box/Stem Kit</b>	
XA-BXCCJBOX - 6.0" [152mm] H x 3/4" [19mm] NPT Stem	
- Watertight	
- Rated for feed through 8 (4 in, 4 out) #12 AWC conductors	
<b>Direct Mount Beauty Plates</b>	
XA-BXCCBP+ - 26.17" [665mm] Beauty Plate Only (18 ga. steel)	
XA-BXCCBPB12+ - 26.17" [665mm] Beauty Plate (18 ga. steel) w/12" [305mm] Backer Plate (16 ga. steel)	
- For use in canopies where deck opening is larger than what is required for mounting the CPY250 luminaire. Maximum deck opening 10.75" x 15" [183mm x 375mm]	
XA-BXCCBPB16+ - 26.17" [665mm] Beauty Plate (18 ga. steel) w/16" [406mm] Backer Plate (16 ga. steel)	
- For use in canopies where deck opening is larger than what is required for mounting the CPY250 luminaire. Maximum deck opening 12" x 15" [305mm x 375mm]	
<b>Pendant Mount Luminaires</b>	
<b>Pendant Mount Kits</b>	
XA-PS12KIT* - 5" [127mm] pendant	
XA-PS18KIT* - 11" [279mm] pendant	
XA-PS22KIT* - 15" [381mm] pendant	
- Includes two conduit fittings and 3/4-14 NPT pipe threaded on two ends	
<b>Pendant Mount Leveler</b>	
XA-PNDTLVL*	
For 0-13° sloped ceilings	
<b>Synapse® SimplySnap 10V Interface</b>	
DIM10-220F	
- 120V-277V	
- Requires other Synapse components to complete system	
- Refer to <a href="#">DIM10-220E</a> spec sheet for details	

\* Must specify color: BK (Black), BZ (Bronze), SV (Silver) or WH (White). No finish color is required for XA-PNDTLVL accessory when silver finish is specified.  
+ Must specify color: T (Black), Z (Bronze), S (Silver) or W (White)

## Ordering Information

Example: CPY250-C-13L-57K7-D-UL-DM-SV

Product	Version	Lumen Package*	CCT/CRI	Optic	Voltage	Mounting	Color Options	Controls	Options
CPY250	C	2L 2,000 Lumens 4L 4,000 Lumens 8L 8,000 Lumens 13L 13,000 Lumens 21L 21,000 Lumens	30K8 3000K, 80 CRI 40K7 4000K, 70 CRI 40K9 4000K, 90 CRI 50K7 5000K, 70 CRI 50K9 5000K, 90 CRI 57K7 5700K, 70 CRI	D 0.91" [23mm] Drop Lens F Flat Lens	UL Universal 120-277V UH Universal 347-480V - Available only in 4L-21L lumen packages	DM Direct FM Flush Mount H6 Car Wash HC Hook & Cord PD Pendant	BK Black BZ Bronze SV Silver WH White	BLANK Non-Dimming 10V 0-10V Dimming - Control by others - Refer to <a href="#">Dimming spec sheet</a> for details BML Bluetooth® Technology Enabled Multi-Level Sensor - Utilizes a multifunction sensor - Available only with UL voltage - Refer to <a href="#">BML spec sheet</a> for details - 8-20' sensor lens installed on luminaire; 20-40' sensor lens and aisle shroud included - Not available with other controls	10KV 10kV/5kA Surge Suppression - Replaces standard 6kV/3kA surge suppression - Not for use with BML as BML option includes 10kV/5kA surge as standard HZ Class I, Div. 2 Hazardous Location Certification - Available with DM and PD mounts only - Not available with BML control or K option K NSF 2 Certification - Luminaires include NSF certification mark - Suitable for DM mount only - Not available with BML control or HZ option

\* Lumen Package codes identify approximate light output only. Actual lumen output levels may vary depending on CCT and optic selection. Refer to Initial Delivered Lumen tables for specific lumen values.


## DM Mount / DM Mount with HZ Option



Flat Lens



Drop Lens

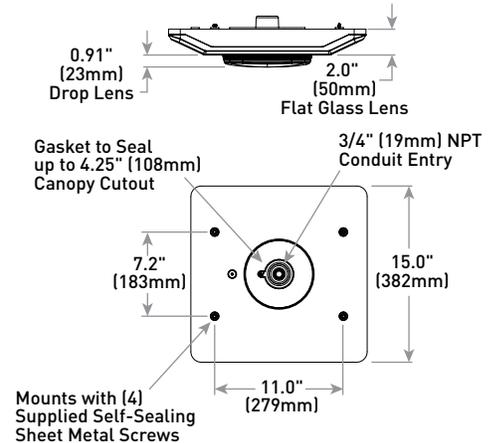

Weight
12.5 lbs. [5.7kg]

Refer to Page 4 for additional mounts.



**CREE LIGHTING®**

Website: [creelighting.com](http://creelighting.com)

US: (800) 236-6800 Canada: (800) 473-1234

# CPY250® LED Canopy/Soffit Luminaire - Version C

## Product Specifications

### CONSTRUCTION & MATERIALS

- Slim, low profile design
- Easy mounting and servicing from below the deck
- Luminaire housing is constructed of rugged cast aluminum with integral heat sink specifically designed for LED
- Flat lens is 0.125" tempered Solite® glass
- Drop lens is 0.157" molded borosilicate glass
- Direct mount is suitable for use in single or double skin canopies with a minimum 4.0" (102mm) wide panels and a minimum 22 gauge, 0.030" (0.7mm) canopy thickness
- Direct mount luminaire mounts directly to the canopy deck with the drilling of a single 2" to 4" (51mm to 102mm) round hole, is secured in place with self-sealing screws that provide a weathertight seal and includes 3/4" (19mm) conduit entry for direct wire feed
- Hook and cord mount includes a 3' (0.91m) cord out of the luminaire and is intended to hang from the single hook
- Standard pendant mount includes a mounting bracket and a J-Box for customer wiring and is intended to be mounted by 3/4 IP pendant (by others)
- Hazardous location pendant mount has a threaded hub which accepts 3/4" NPT conduit (by others) and secures with a 1/4"-20 set screw
- H6 mount includes cable gland with 3' (0.91m) cord out of the luminaire and is intended to hang from the single hook
- Flush mount includes perimeter gasket, watertight cable gland and 6' (1.8m) flexible watertight conduit out of luminaire
- Flush mount attaches to ceiling with (4) self-drilling screws
- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Black, bronze, silver and white are available
- **Weight:** 12.5 lbs. (5.7kg)
- Includes QR code, attached to the bottom-right housing corner underneath the cover, which provides access to: Online installation instructions, Luminaire information (Part number, Serial number, Build date, and Warranty end date), and Warranty claim submission form
- Duplicate 1" and 2" QR code labels are included. 1" labels can be affixed next to fixtures, on site plans, or in maintenance records. 2" labels can be scanned from the ground when placed at an appropriate height

### ELECTRICAL SYSTEM

- **Input Voltage:** 120-277V or 347-480V, 50/60Hz
- **Power Factor:** > 0.9 at full load
- **Total Harmonic Distortion:** < 20% at full load
- Integral 6kV/3kA surge suppression protection standard; 10kV/5kA surge suppression protection optional
- When code dictates fusing, a slow blow fuse or type C/D breaker should be used to address inrush current

### CONTROLS

- 10V option provides continuous dimming to 10% with 0-10V DC control protocol
- **Maximum 10V Source Current:** 1mA
- Use only lighting controls with neutral connection or controls intended for use with LED fixtures
- Reference [LED Dimming spec sheet](#) for additional dimming information

### REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for wet locations when ordered with DM, DM mount w/HZ option, PD mount w/HZ option, FM and H6 mounts. Covered ceiling required only when not used with cULus Listed, wet location junction box or XA-BXCCJBOX accessory
- Suitable for damp locations when ordered with HC and PD mounts. Designed for indoor use only
- Enclosure meets IP66 requirements per IEC 60529 when ordered with DM, FM and H6 mounts
- ANSI C136.2 6kV/3kA (standard) and 10kV/5kA (optional) surge protection, tested in accordance with IEEE/ANSI C62.41.2. BML option includes 10kV surge protection
- Meets FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions
- Luminaire and finish endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- Assembled in the USA by Cree Lighting from US and imported parts
- Meets the requirements for Buy American Act (BAA) because it qualifies as a commercially-available off-the-shelf (COTS) item
- RoHS compliant. Consult factory for additional details
- Class I, Division 2 Hazardous Location rated when ordered with the DM or PD mount and the HZ option. Not available with K or BML options. Rated for Groups A, B, C & D. Bears a T3C (160°C) temperature classification within a 25°C ambient
- NSF Certified when ordered with DM mount and K option. Not available with HZ or BML options. Refer to <http://info.nsf.org/Certified/Food/> for additional details
- Dark Sky Friendly, IDA Approved when ordered with 30K CCT and Flat Lens (F). Please refer to <https://www.darksky.org/our-work/lighting/lighting-for-industry/fsa/fsa-products/> for most current information
- DLC Premium qualified for Fuel Pump Canopies. DLC Standard qualified for High-Bay/Low Bay luminaires when ordered with 8L and 30K8, 40K9 and 50K9 CCTs, 13L or 21L lumen packages with all CCTs. Please refer to <https://qpl.designlights.org/solid-state-lighting> for most current information
- **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

Electrical Data*							
Lumen Package	System Watts 120-480V**	Total Current (A)					
		120V	208V	240V	277V	347V	480V
2L	14	0.11	0.07	0.06	0.05	N/A	N/A
4L	29	0.24	0.14	0.12	0.10	0.08	0.06
8L	53	0.45	0.26	0.22	0.19	0.15	0.11
13L	86	0.73	0.42	0.36	0.32	0.25	0.19
21L	132	1.13	0.64	0.56	0.49	0.38	0.28

\* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-277V or 347-480V +/- 10%.  
\*\* 2L not available in 347-480V.

CPY Series (Version C) Ambient Adjusted Lumen Maintenance <sup>1</sup>						
Ambient	Luminaire Mounting Surface	Initial LMF	25K hr Reported <sup>2</sup> LMF	50K hr Reported <sup>2</sup> LMF	75K hr Reported <sup>2</sup> LMF	100K hr Reported <sup>2</sup> LMF
5°C (41°F)	2L-21L Plywood/ 2L-21L Metal	1.02	0.99	0.93	0.88	0.83
10°C (50°F)	2L-21L Plywood/ 2L-21L Metal	1.02	0.98	0.93	0.87	0.82
15°C (59°F)	2L-21L Plywood/ 2L-21L Metal	1.01	0.98	0.92	0.87	0.82
20°C (68°F)	2L-21L Plywood/ 2L-21L Metal	1.01	0.97	0.92	0.86	0.81
25°C (77°F)	2L-21L Plywood/ 2L-21L Metal	1.00	0.97	0.91	0.86	0.81
30°C (86°F)	2L-13L Plywood/ 2L-21L Metal	0.99	0.96	0.90	0.85	0.80
	21L Plywood	0.99	0.95	0.89	0.84	0.79
35°C (95°F)	2L-13L Plywood/ 2L-21L Metal	0.99	0.95	0.90	0.85	0.80
	21L Plywood	0.99	0.94	0.87	0.82	0.76
40°C (104°F)	2L-13L Plywood/ 2L-21L Metal	0.98	0.95	0.89	0.84	0.79
45°C (113°F)	2L-4L Plywood/ 2L-13L Metal	0.98	0.94	0.89	0.84	0.79
50°C (122°F)	2L-4L Metal	0.97	0.92	0.87	0.81	0.76

<sup>1</sup> Lumen maintenance values at 25°C (77°F) are calculated per IES TM-21 based on IES LM-80 report data for the LED package and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors. Please refer to the [Temperature Zone Reference Document](#) for outdoor average nighttime ambient conditions.

<sup>2</sup> In accordance with IES TM-21, Reported values represent interpolated values based on time durations that are up to 6x the tested duration in the IES LM-80 report for the LED.

<sup>3</sup> Estimated values are calculated and represent time durations that exceed the 6x test duration of the LED.

Operating Temperature Range				
Lumen Package	Direct Mount to Plywood	Direct Mount to Sheet Metal/Suspended	Class 1, Division 2 Hazardous Location	
			Direct Mount to Plywood	Direct Mount to Sheet Metal/Suspended
2L	-40°C to +45°C	-40°C to +50°C	-40°C to +25°C	
4L	-40°C to +45°C	-40°C to +50°C		
8L	-40°C to +40°C	-40°C to +45°C		
13L	-40°C to +40°C	-40°C to +45°C		
21L	-40°C to +35°C	-40°C to +40°C		

**NOTE:** Standard luminaires are UL rated at 40°C, and hazardous location luminaires are UL rated at 25°C, but will operate in the ambients listed above


**WARNING:** Exceeding maximum operating temperature may result in thermal foldback

### Photometry


All published luminaire photometric testing performed to IES LM-79 standards.

To obtain an IES file specific to your project consult: <https://www.creelighting.com/products/outdoor/canopy-and-soffit/cpy250-series>

#### DROP LENS

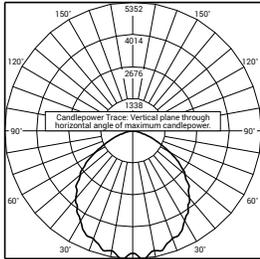

RESTL Test Report #: PL16573-001A  
 CPY250-C-13L-57K7-D-UL-\*\*-\*\*-\*\*\*  
 Initial Delivered Lumens: 13,260

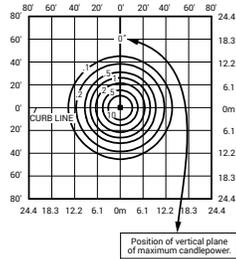


CPY250-C-13L-57K7-D-UL-\*\*-\*\*-\*\*\*  
 Mounting Height: 15' (4.6m) A.F.G.  
 Initial Delivered Lumens: 13,750  
 Initial FC at grade

Drop Lens Distribution						
Lumen Package	3000K		4000K/5000K		4000K/5000K/5700K	
	80 CRI		90 CRI		70 CRI	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-20	Initial Delivered Lumens*	BUG Ratings** Per TM-15-20	Initial Delivered Lumens*	BUG Ratings** Per TM-15-20
2L	2,100	B1 U1 G1	1,730	B1 U1 G1	2,310	B1 U1 G1
4L	4,160	B2 U1 G1	3,440	B2 U1 G1	4,590	B2 U2 G1
8L	7,675	B3 U2 G1	6,325	B2 U2 G1	8,475	B3 U2 G1
13L	12,450	B3 U2 G1	10,225	B3 U2 G1	13,750	B3 U2 G1
21L	19,200	B4 U2 G2	15,700	B3 U2 G2	21,300	B4 U2 G2


\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

#### FLAT LENS

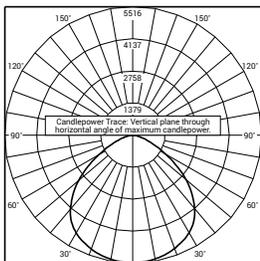

RESTL Test Report #: PL16548-004A  
 CPY250-C-13L-57K7-F-UL-\*\*-\*\*-\*\*\*  
 Initial Delivered Lumens: 14,015

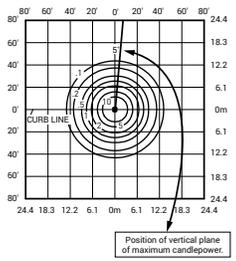


CPY250-C-13L-57K7-F-UL-\*\*-\*\*-\*\*\*  
 Mounting Height: 15' (4.6m) A.F.G.  
 Initial Delivered Lumens: 14,015  
 Initial FC at grade

Flat Lens Distribution						
Lumen Package	3000K		4000K/5000K		4000K/5000K/5700K	
	80 CRI		90 CRI		70 CRI	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-20	Initial Delivered Lumens*	BUG Ratings** Per TM-15-20	Initial Delivered Lumens*	BUG Ratings** Per TM-15-20
2L	2,100	B1 U0 G0	1,730	B1 U0 G0	2,310	B1 U0 G0
4L	4,160	B2 U0 G1	3,440	B2 U0 G1	4,590	B2 U0 G1
8L	7,675	B3 U0 G1	6,325	B2 U0 G1	8,475	B3 U0 G1
13L	12,450	B3 U0 G1	10,225	B3 U0 G1	13,750	B3 U0 G1
21L	19,200	B4 U0 G1	15,700	B3 U0 G1	21,300	B4 U0 G1


\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


**H6 Mount**

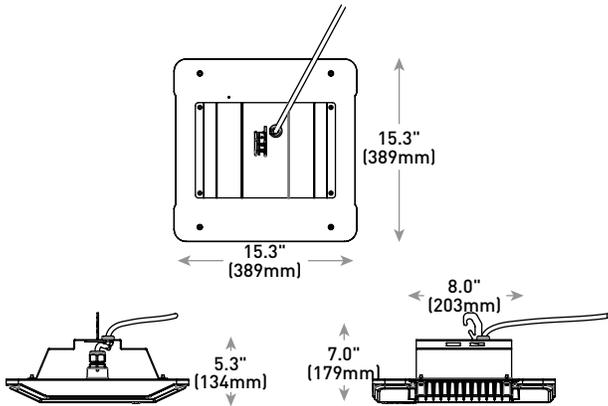


**HC Mount**

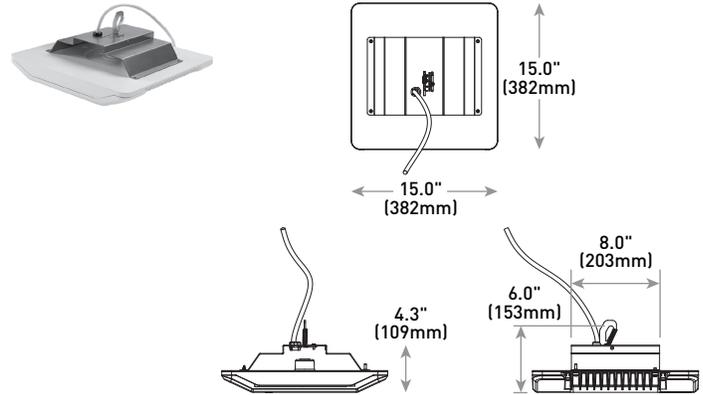


**PD Mount**

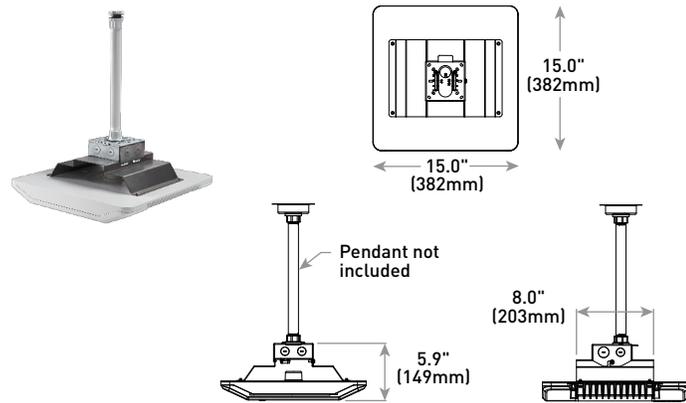

**PD Mount w/HZ Option**

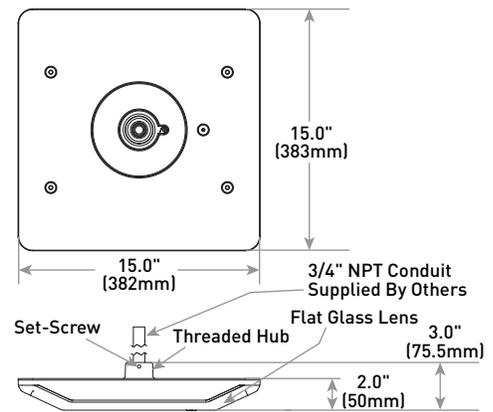

**FM Mount**

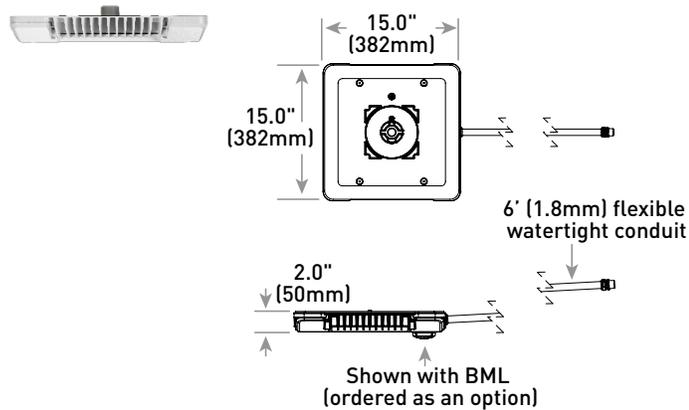

© 2025 Cree Lighting USA LLC. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.creelighting.com/patents](http://www.creelighting.com/patents). Colorfast DeltaGuard® and CPY250® are registered trademarks, and the CPY250 design is a trademark of Cree Lighting USA LLC. Cree Lighting® and the Cree Lighting logo are registered trademarks of CLNA Holdings LLC. The UL logo is a registered trademark of UL LLC. The NSF logo is a registered trademark of NSF International. Synapse® is a registered trademark of Synapse Wireless, Inc. The DLC QPL, DLC QPL Premium and the DLC LUNA Logos are the registered and unregistered trademarks of Efficiency Forward, Inc. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license. Other trademarks, service marks, and trade names are those of their respective owners. IOS is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries. Android is a trademark of Google, Inc.

Project		Catalog #		Type	
Prepared by		Notes		Date	



# McGraw-Edison

## GALN Galleon II

Area / Site Luminaire

### Product Features



### Product Certifications



### Interactive Menu

- Ordering Information [page 2](#)
- Mounting Details [page 3](#)
- Optical Distributions [page 5](#)
- Product Specifications [page 5](#)
- Energy and Performance Data [page 6](#)
- Control Options [page 13](#)

### Quick Facts


- Lumen packages range from 3,300 - 102,700 (33W - 658W)
- 17 optical distributions
- Efficacy up to 178 LPW

### Connected Systems


- Wavelinx LITE Wireless
- Wavelinx PRO Wireless
- AirMesh Wireless

### Dimensional Details

#### Standard Pole Mount Arm

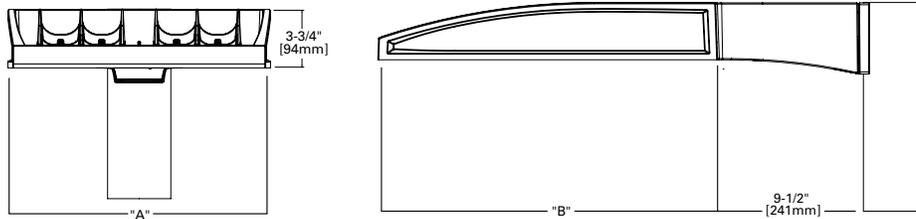

#### Pole Drilling Pattern

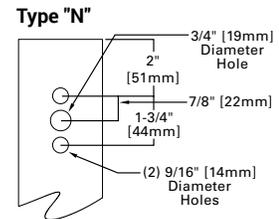

Number of Light Squares	Width "A"	Housing Length "B"	Weight with Standard or QM Arm	EPA with Standard or QM Arm
1-4	16"	22"	29 lb	0.95
5-6	22"	22"	39 lb	0.95
7-9	22"	28-1/8"	48 lb	1.1

NOTES: For arm selection requirements and additional line art, see Mounting Details section.

Ordering Information

SAMPLE NUMBER: GALN-SA4C-740-U-T4FT-GM


Product Family <sup>1,2</sup>	Light Engine Configuration			Color Temperature	Voltage	Distribution	Mounting	Finish
	Light Square	Square Count	Lumen Output					
<b>GALN</b> =Galleon II <b>BAA-GALN</b> =Galleon II Buy American Act Compliant <sup>26</sup> <b>TAA-GALN</b> =Galleon II Trade Agreements Act Compliant <sup>26</sup> <b>BABA-GALN</b> =Galleon II BABA/IIJA Compliant	<b>SA</b> =16 LED Light Square <b>SB</b> =26 LED Light Square	1=1 Light Square 2=2 Light Squares 3=3 Light Squares 4=4 Light Squares 5=5 Light Squares 6=6 Light Squares 7=7 Light Squares 8=8 Light Squares 9=9 Light Squares	<b>A</b> =Output Level 1 <b>B</b> =Output Level 2 <b>C</b> =Output Level 3 <b>D</b> =Output Level 4 <sup>4,16</sup> <b>Z</b> =Configured Output <sup>32</sup>	722=70CRI, 2200K 727=70CRI, 2700K 730=70CRI, 3000K 735=70CRI, 3500K 740=70CRI, 4000K 750=70CRI, 5000K 760=70CRI, 6000K 827=80CRI, 2700K 830=80CRI, 3000K 835=80CRI, 3500K 840=80CRI, 4000K 930=90CRI, 3000K 935=90CRI, 3500K 940=90CRI, 4000K 950=90CRI, 5000K AMB=Amber <sup>14,16</sup>	<b>U</b> =120-277V <b>H</b> =347V-480V <sup>7,29</sup> 1=120V 2=208V 3=240V 4=277V 8=480V <sup>7,29</sup> 9=347V <sup>7</sup> <b>DV</b> =277V-480V DuraVolt Drivers <sup>28,29,30</sup>	<b>T1</b> =Type I <b>T2</b> =Type II <b>T2R</b> =Type II Roadway <b>T3</b> =Type III <b>T3R</b> =Type III Roadway <b>T4FT</b> =Type IV Forward Throw <b>T4W</b> =Type IV Wide <b>5NQ</b> =Type V Narrow <b>5MQ</b> =Type V Square Medium <b>5WQ</b> =Type V Square Wide <b>SL2</b> =Type II w/Spill Control <b>SL3</b> =Type III w/Spill Control <b>SL4</b> =Type IV w/Spill Control <b>SLL</b> =90° Spill Light Eliminator Left <b>SLR</b> =90° Spill Light Eliminator Right <b>RW</b> =Rectangular Wide Type I <b>AFL</b> =Automotive Frontline	<b>[blank]</b> =Standard Pole Mount Arm <b>QU</b> =Quick Mount Universal Arm <b>QM</b> =Pole Mount Arm with Quick Mount Adaptor <b>PA</b> =Pole Mount, Adjustable <b>SP</b> =3" Slipfitter, Adjustable <sup>8</sup> <b>SP2</b> =2-3/8" Slipfitter, Adjustable <sup>8</sup> <b>QMA</b> =Quick Mount Mast Arm, Fixed <b>MA</b> =Mast Arm, Fixed <b>WM</b> =Wall Mount, Fixed <b>WA</b> =Wall Mount, Adjustable <b>UP</b> =Upswept Arm	<b>AP</b> =Grey <b>BZ</b> =Bronze <b>BK</b> =Black <b>DP</b> =Dark Platinum <b>GM</b> =Graphite Metallic <b>WH</b> =White <b>RALXX</b> =Custom Color

Options (Add as Suffix)	Controls and Systems Options (Add as Suffix)	Accessories (Order Separately) <sup>27</sup>
<b>DIM</b> =External 0-10V Dimming Leads <sup>19</sup> <b>F</b> =Single Fuse (120, 277 or 347V Specify Voltage) <b>FF</b> =Double Fuse (208, 240 or 480V Specify Voltage) <b>20K</b> =20kV UL 1449 fused surge protective device <sup>10</sup> <b>2L</b> =Two Circuits <sup>10</sup> <b>HA</b> =50°C High Ambient <sup>16</sup> <b>HSS</b> =Installed House Side Shield <sup>17</sup> <b>BCS</b> =Backlight Control Shield <sup>17,37</sup> <b>GRSBK</b> =Glare Reducing Shield, Black <sup>22</sup> <b>GRSWH</b> =Glare Reducing Shield, White <sup>22</sup> <b>LCF</b> =Light Square Trim Painted to Match Housing <sup>25</sup> <b>TH</b> =Tool-less Door Hardware <sup>5</sup> <b>CC</b> =Coastal Construction finish <sup>3</sup> <b>L90</b> =Optics Rotated 90° Left <b>R90</b> =Optics Rotated 90° Right <b>3SDCM</b> =3 Standard Deviation Color Matching <sup>36</sup> <b>AHD145</b> =After Hours Dim, 5 Hours <sup>21</sup> <b>AHD245</b> =After Hours Dim, 6 Hours <sup>21</sup> <b>AHD255</b> =After Hours Dim, 7 Hours <sup>21</sup> <b>AHD355</b> =After Hours Dim, 8 Hours <sup>21</sup> <b>DALI</b> =DALI Drivers	<b>BPC</b> =Button Type Photocontrol. Must specify voltage 120V, 208V, 240V or 277V. <sup>6</sup> <b>PR</b> =NEMA 3-PIN Photocontrol Receptacle <b>PR7</b> =NEMA 7-PIN Photocontrol Receptacle <sup>20</sup> <b>FADC</b> =Field Adjustable Dimming Controller <sup>31</sup> <b>PSC</b> =Photocontrol Shorting Cap <b>SPB2</b> =Dimming Motion Sensor, 9'-20' mounting <sup>23</sup> <b>SPB4</b> =Dimming Motion Sensor, 21'-40' mounting <sup>23</sup> <b>SPB2/X</b> =Dimming Motion Sensor, limited square count, 9'-20' mounting <sup>23</sup> <b>SPB4/X</b> =Dimming Motion Sensor, limited square count, 21'-40' mounting <sup>23</sup> <b>MS/DIM-L20</b> =Motion Sensor for Dimming Operation, 9'-20' Mounting <sup>33</sup> <b>MS/DIM-L40</b> =Motion Sensor for Dimming Operation, 21'-40' Mounting <sup>33</sup> <b>WLS2XX</b> =WaveLinx LITE, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 15' - 15' Mounting <sup>12,16,34</sup> <b>WLS4XX</b> =WaveLinx LITE, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 15' - 40' Mounting <sup>12,16,34</sup> <b>WPS2XX</b> =WaveLinx PRO, SR Driver, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting <sup>12,13,34</sup> <b>WPS4XX</b> =WaveLinx PRO, SR Driver, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting <sup>12,13,34</sup> <b>DIM10-L20</b> =AirMesh Occupancy Sensor (9'-20' Mounting) <sup>16,35</sup> <b>DIM10-L40</b> =AirMesh Occupancy Sensor (21'-40' Mounting) <sup>16,35</sup>	<b>OA/RA1016</b> =NEMA Photocontrol Multi-Tap - 105-285V <b>OA/RA1027</b> =NEMA Photocontrol - 480V <b>OA/RA1201</b> =NEMA Photocontrol - 347V <b>OA/RA1013</b> =Photocontrol Shorting Cap <b>OA/RA1014</b> =120V Photocontrol <b>MA1252</b> =10kV Surge Module Replacement <b>MA1036-XX</b> =Single Tenon Adapter for 2-3/8" O.D. Tenon <b>MA1037-XX</b> =2@180° Tenon Adapter for 2-3/8" O.D. Tenon <b>MA1197-XX</b> =3@120° Tenon Adapter for 2-3/8" O.D. Tenon <b>MA1188-XX</b> =4@90° Tenon Adapter for 2-3/8" O.D. Tenon <b>MA1189-XX</b> =2@90° Tenon Adapter for 2-3/8" O.D. Tenon <b>MA1190-XX</b> =3@90° Tenon Adapter for 2-3/8" O.D. Tenon <b>MA1191-XX</b> =2@120° Tenon Adapter for 2-3/8" O.D. Tenon <b>MA1038-XX</b> =Single Tenon Adapter for 3-1/2" O.D. Tenon <b>MA1039-XX</b> =2@180° Tenon Adapter for 3-1/2" O.D. Tenon <b>MA1192-XX</b> =3@120° Tenon Adapter for 3-1/2" O.D. Tenon <b>MA1193-XX</b> =4@90° Tenon Adapter for 3-1/2" O.D. Tenon <b>MA1194-XX</b> =2@90° Tenon Adapter for 3-1/2" O.D. Tenon <b>MA1195-XX</b> =3@90° Tenon Adapter for 3-1/2" O.D. Tenon <b>SRA238</b> =Adapter kit for mounting 3" SP arm to 2-3/8" O.D. vertical tenon <b>FSIR-100</b> =Wireless Configuration Tool for MS/DIM <sup>33</sup> <b>LS/HSS</b> =Field Installed House Side Shield for SA Light Squares <sup>9,17</sup> <b>LS/HSS-SB</b> =Field Installed House Side Shield for SB Light Squares <sup>9,17</sup> <b>LS/BCS</b> =Backlight Control Shield <sup>9,17,37</sup> <b>LS/GRSBK-2PK</b> =Glare Reducing Shield, Black <sup>9,22</sup> <b>LS/GRSWH-2PK</b> =Glare Reducing Shield, White <sup>9,22</sup> <b>LS/PFS</b> =Perimeter Shield, Black <sup>15</sup> <b>WOLC-7P-10A</b> =WaveLinx Outdoor Control Module <sup>11,18,13</sup> <b>TL7-G1-HV</b> = AirMesh 7-PIN node, 110-480V <sup>11,18,35</sup> <b>CBSSW-450-002</b> = AirMesh central base station with 5-button control <sup>35</sup>

- NOTES:**
- Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to our white paper WP513001EN for additional support information.
  - DesignLights Consortium® Qualified. Refer to [www.designlights.org](http://www.designlights.org) Qualified Products List under Family Models for details.
  - Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654. Not available with TH option.
  - When using SA light squares, Output Level 4 not available with color temperatures 722, 727, 827, 830 or 930 when HSS is used.
  - TH option not 3G rated. Not available with Coastal Construction (CC) option.
  - Not available with voltage options H, 8 or 9.
  - Not available with SB1A or SB2A configurations. Not available in combination with HA high ambient and sensor options at Output Level 3. H voltage not available with sensor options, choose voltage 8 or 9.
  - SP arm limited to 3" O.D. vertical tenon. SP2 limited to 2-3/8" O.D. vertical tenon.
  - One required for each Light Square.
  - 2L is not available with SB light squares. Not available with SPB at 347V or 480V. Not available with WaveLinx or 20kV surge option.
  - Requires PR7.
  - Replace XX with sensor color (WH, BZ or BK.).
  - WAC Gateway required to enable field-configurability. Order WAC-PoE and WPOE-120 (10V to PoE injector) power supply if needed. WAC not required for LC Bluetooth sensors.
  - Narrow-band 590nm +/- 5nm for wildlife and observatory use. Choose Output Level 1; supplied at 500mA drive current only. Not available with SB light squares. Exact luminaire wattage available in IES files. Available with 5WQ, 5MQ, SL2, SL3 and SL4 distributions. Can be used with HSS option.
  - Set of 4 pcs. One set required per Light Square.
  - HA option not available with Output Level 4 or AMB Amber.
  - Not for use with T1, 5NQ, 5MQ, 5WQ or RW optics.
  - Cannot be used with other control options.
  - Low voltage control lead brought out 18" outside fixture. Not available with DALI or integrated controls options.
  - Not available if any SPB, LWR, or WaveLinx sensor is selected. Motion sensor has an integral photocell.
  - Requires the use of BPC photocontrol or the PR7 or PR photocontrol receptacle with photocontrol accessory. Not available with SB light squares when using Output Level 4.
  - Not for use with T1, T4FT, T4W or SL optics. See IES files for details. Not available with SB light squares.
  - Sensor configuration mobile application required for configuration. See controls page for details.
  - Replace X with number of Light Squares controlled by the SPB, referencing the "SPB/X Availability Table" on the controls page.
  - Not available with HSS, GRSWH or GRSBK.
  - Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to [DOMESTIC-PREFERENCES](http://DOMESTIC-PREFERENCES) website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.
  - For BAA or TAA requirements, Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.
  - DuraVolt drivers feature added protection from power quality issues such as loss of neutral, transients and voltage fluctuations. Visit [www.signify.com/duravolt](http://www.signify.com/duravolt) for more information.
  - 480V not to be used with ungrounded or impedance grounded systems.
  - Not available with SA1A or SA1B. Not available with SB1, or any SB configuration using Output Level 1. Not available with any control option except SPB.
  - Cannot be used with DALI, PR7, or other motion response control options. Not available with SB light squares when using Output Level 4.
  - Use GALN Product Configurator to specify lumen output, drive current and wattage. Not available with AMB. Not available with SB light squares.
  - Uses the FSP-211 motion sensor. The FSIR-100 configuration tool is required to adjust parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative at Cooper Lighting Solutions for more information.
  - Controls system is not available with photocontrol receptacles (PR, PR7) or other controls systems (FADC, SPBx).
  - Requires AirMesh central base station CBSSW-450-002 and Synapse commissioning for operation.
  - 3-step MacAdam ellipse binning. Available in 740 CRI/CCT only. Longer lead times apply, consult your lighting representative at Cooper Lighting Solutions for more information.
  - Not available with SB light squares.


Mounting Details

Pole Configuration Options

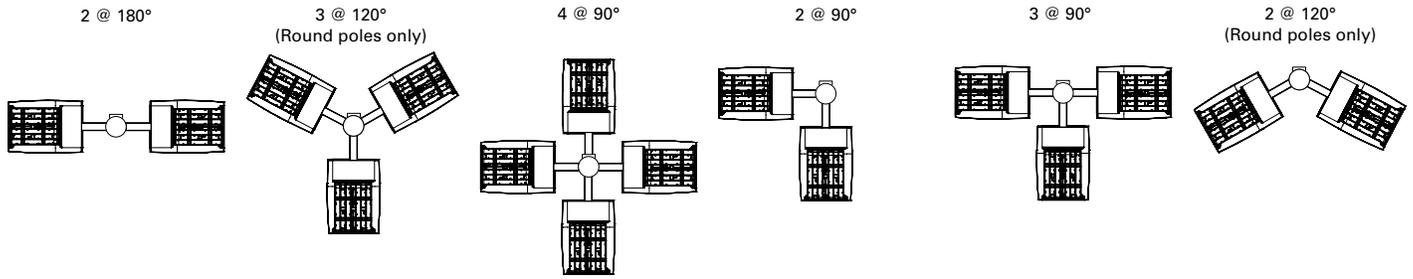


Pole Drilling Patterns


Type "N"

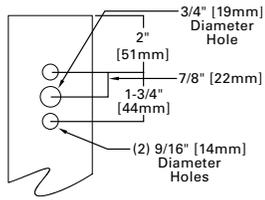


Type "R"



Type "M"

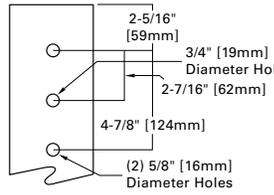


Quick Mount Universal Arm (QU)

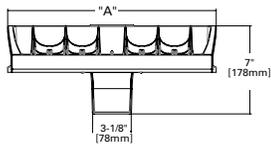


\*NOTE: Universal bolt pattern compatible with Type N through Type M drilling patterns

Quick Mount Mast Arm (QMA)




\*NOTE: Fits 2-3/8" O.D. tenon

Pole Mount Arm with Quick Mount Adaptor (QM)

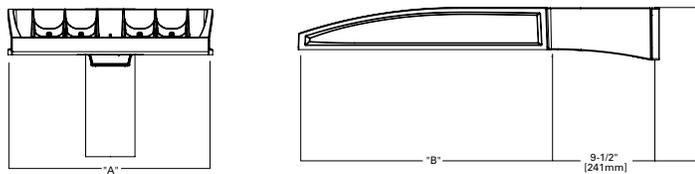


\*NOTE: Use Type N drilling pattern

Mast Arm, Fixed (MA)




\*NOTE: Fits 2-3/8" O.D. tenon

Upswept Arm (UP)

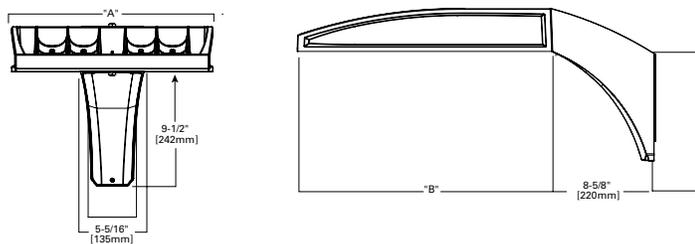


\*NOTE: Universal bolt pattern compatible with Type N through Type M drilling patterns

Wall Mount, Fixed (WM)

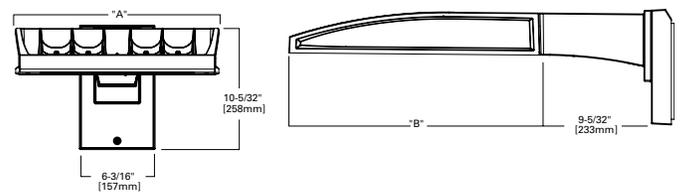


Mounting Details


Wall Mount, Adjustable (WA)

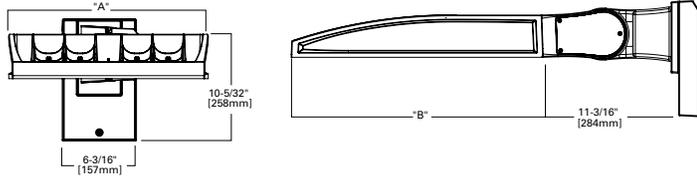


3" Slipfitter, Adjustable (SP)

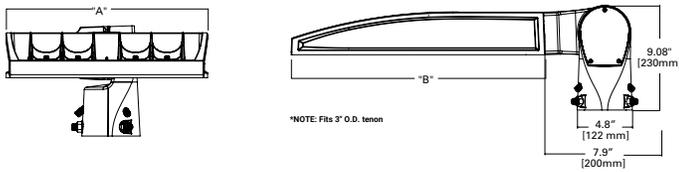

2-3/8" Slipfitter, Adjustable (SP2)

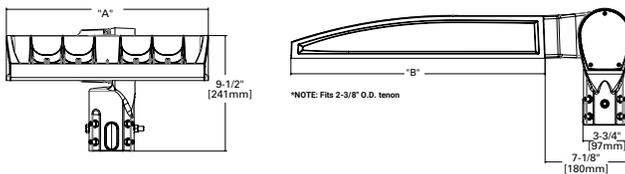


Pole Mount, Adjustable Arm (PA)

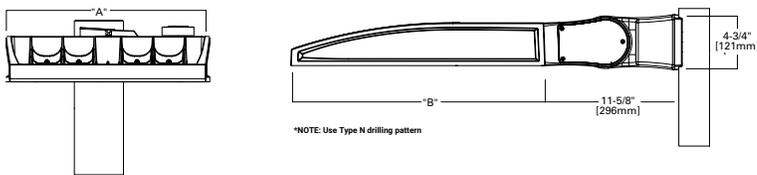

Adjustable Arm Range of Motion


- Includes WA, SP, SP2 and PA mounting options
- Adjustable in increments of 5°
- Must maintain downward facing orientation

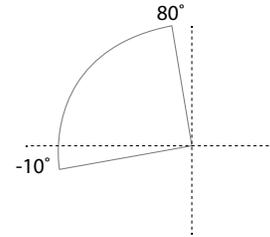

Fixture Weights and EPAs

Tilt Angle (Degrees)	Number of Light Squares	Weight	1 @ 90°	2 @ 180°	2 @ 90°	2 @ 120°	3 @ 90°	3 @ 120°	4 @ 90°
0°	1-4	33.5 lb (15.2 kg)	0.85	1.70	1.46	1.66	2.31	2.25	2.35
	5-6	43.5 lb (19.7 kg)	0.86	1.71	1.62	1.80	2.49	2.35	2.50
	7-9	52.5 lb (23.8 kg)	0.98	1.95	1.75	1.98	2.73	2.55	2.76
15°	1-4	33.5 lb (15.2 kg)	1.10	1.71	1.95	2.26	2.81	3.30	2.87
	5-6	43.5 lb (19.7 kg)	1.42	1.71	2.27	2.72	3.13	3.63	3.15
	7-9	52.5 lb (23.8 kg)	1.69	1.96	2.67	3.22	3.65	4.38	3.72
30°	1-4	33.5 lb (15.2 kg)	1.72	1.81	2.58	3.21	3.44	4.59	3.53
	5-6	43.5 lb (19.7 kg)	2.26	2.29	3.11	4.00	3.97	5.27	4.00
	7-9	52.5 lb (23.8 kg)	2.75	2.85	3.73	4.83	4.71	6.45	4.81
45°	1-4	33.5 lb (15.2 kg)	2.25	2.36	3.10	4.00	3.96	5.63	4.08
	5-6	43.5 lb (19.7 kg)	2.96	2.99	3.81	5.06	4.67	6.49	4.71
	7-9	52.5 lb (23.8 kg)	3.63	3.76	3.73	6.17	5.59	8.03	5.73
60°	1-4	33.5 lb (15.2 kg)	2.63	2.77	3.49	4.58	4.34	6.21	4.48
	5-6	43.5 lb (19.7 kg)	3.46	3.51	4.32	5.84	5.19	7.01	5.22
	7-9	52.5 lb (23.8 kg)	4.27	4.44	5.25	7.15	6.23	8.80	6.40

## Optical Distributions

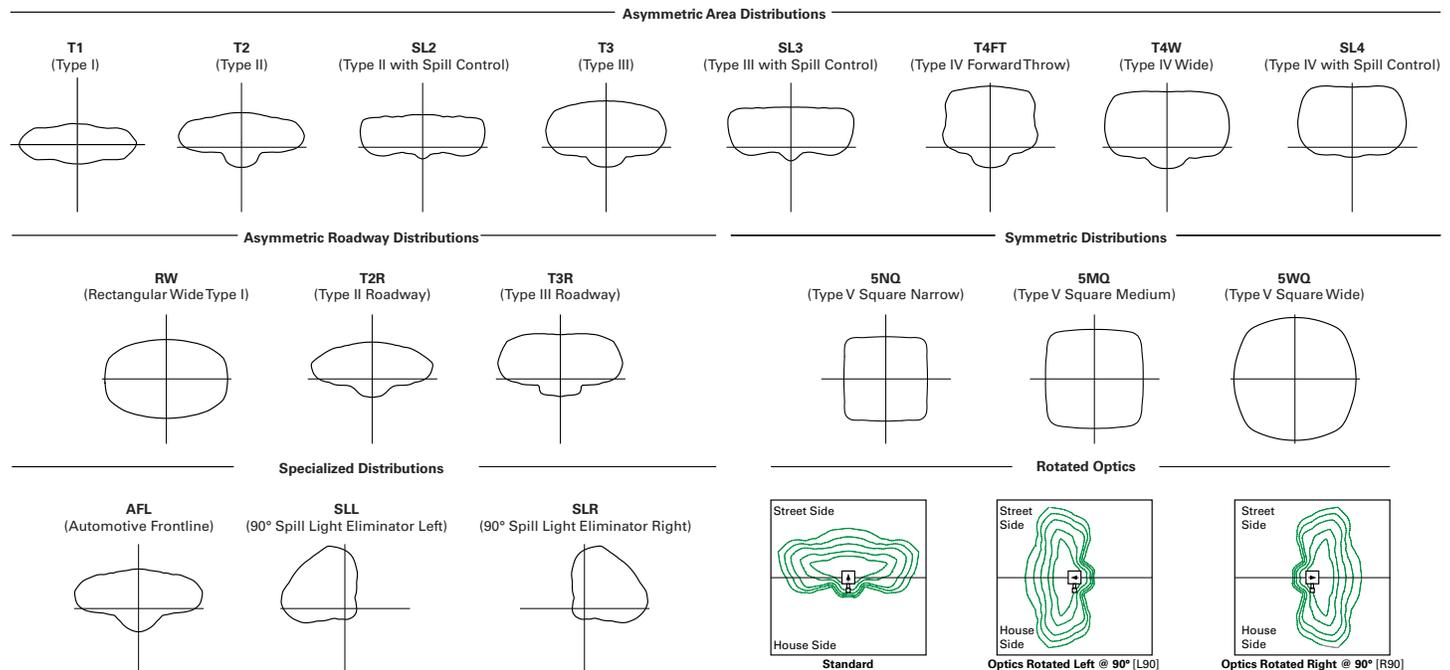

## Product Specifications

### Construction

- Die-cast aluminum housing and heat sink
- Three housing sizes, using 1 to 9 light squares

### Optics

- High-efficiency injection-molded AccuLED Optics technology
- 17 optical distributions for area site and roadway applications
- 4 shielding options include HSS, BCS, GRS and PFS
- IDA Certified (3000K CCT and warmer only, fixed mounting options)
- 5 step MacAdam ellipse binning (5 SDCM) standard with 70CRI and 80CRI. 3SDCM option available with 740 CRI/CCT. 3 step MacAdam ellipse binning standard with 90CRI

### Electrical

- Removable power tray assembly includes drivers, surge modules and control modules for ease of maintenance and serviceability
- Standard with 0-10V dimming
- Standard with 10kV surge module, optional 20kV surge module
- Suitable for operation in -40°C to 40°C ambient environments. Optional 50°C high ambient (HA) configuration
- Luminaire available with the field adjustable dimming controller (FADC) to manually adjust wattage and reduce the total lumen output and light levels. Comes pre-set to the highest position at the lumen output selected

### Mounting

- Arms are factory installed, enabling closed-housing installation
- All arms suitable for round or square pole installation
- All arms provide clearance for multiple fixture installations at 90°

### Finish

- 6 standard finishes use super durable TGIC polyester powder coat paint, providing 2.5 mil nominal thickness and salt-spray tested to 3,000 hours per ASTM B117
- RAL and custom color matches available
- Coastal Construction (CC) option salt-spray tested to 5,000 hours per ASTM B117, achieving a scribe rating of 9 per ASTM D1654

### Compliance

- Visit <https://www.designlights.org/search/> to confirm qualification. Not all product variations are DLC qualified
- IDA Certified (3000K CCT and warmer only, fixed mounting options)
- Domestic preference options to meet BAA or BABA requirements. FHWA and FTA agencies are utilizing their BAA rules for BABA compliance. Only product configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Buy America Build America Act (BABA). BABA is the minimum Government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements

### Typical Applications

- Outdoor, Parking Lots, Walkways, Roadways, Building Areas
- Sports lighting, including tennis, pickleball, basketball courts

### Warranty

- Five-year limited warranty. Consult website for details. [www.cooperlighting.com/legal](http://www.cooperlighting.com/legal)

Energy and Performance Data

Lumen Maintenance (TM-21)

Output Level	Ambient Temperature	25,000 hours*	50,000 hours*	60,000 hours*	100,000 hours**	Theoretical L70 hours**
Output Levels 1-3	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.7%	98.3%	98.1%	97.4%	> 1.9M
	50°C	98.2%	97.2%	96.8%	95.2%	> 851,000
Output Level 4	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.5%	97.9%	97.7%	96.7%	> 1.3M

Lumen Multiplier

Ambient Temperature	Lumen Multiplier
0°C	1.02
10°C	1.01
25°C	1.00
40°C	0.99
50°C	0.97

\* Supported by IES TM-21 standards  
 \*\* Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, explaining proper use of IES TM-21 and LM-80.

FADC Settings

SA1-SA3 (All Output Levels)

FADC Position	Percent of Typical Lumen Output
1	25%
2	48%
3	56%
4	65%
5	75%
6	80%
7	85%
8	90%
9	95%
10	100%

Note: +/-5% typical value

FADC Settings

SA4-SA6 (All Output Levels)

FADC Position	Percent of Typical Lumen Output
1	14%
2	25%
3	32%
4	43%
5	49%
6	57%
7	65%
8	72%
9	80%
10	100%

Note: +/-5% typical value

FADC Settings

SA7-SA9 (All Output Levels)

FADC Position	Percent of Typical Lumen Output
1	19%
2	38%
3	47%
4	63%
5	74%
6	85%
7	95%
8	97%
9	100%
10	100%

Note: +/-5% typical value

Drive Currents

Lumen Output	SA Light Squares	SB Light Squares
Output Level 1	615mA	350mA
Output Level 2	800mA	450mA
Output Level 3	1050mA	615mA
Output Level 4	1200mA	900mA

SA Light Squares, Output Level 1, 4000K CCT, 70 CRI

[Galleon II IES Files](#)

[Supplemental Lumen Tables](#)

Number of Light Squares	1	2	3	4	5	6	7	8	9	
<b>Nominal Power (Watts)</b>	33	63	93	121	154	182	215	244	274	
<b>Input Current @ 120V</b>	0.283	0.529	0.778	1.058	1.310	1.556	1.839	2.089	2.335	
<b>Input Current @ 208V</b>	0.165	0.309	0.460	0.618	0.771	0.919	1.082	1.240	1.379	
<b>Input Current @ 240V</b>	0.143	0.270	0.398	0.540	0.671	0.796	0.944	1.078	1.194	
<b>Input Current @ 277V</b>	0.125	0.237	0.352	0.473	0.581	0.705	0.818	0.962	1.057	
<b>Input Current @ 347V</b>	0.098	0.181	0.272	0.362	0.454	0.544	0.636	0.738	0.816	
<b>Input Current @ 480V</b>	0.073	0.133	0.200	0.267	0.335	0.400	0.470	0.554	0.600	
<b>Optics</b>										
<b>T1</b>	Lumens	4,619	9,180	13,628	18,059	22,861	27,070	31,796	36,863	41,385
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3
	Lumens per Watt	140	146	147	149	148	149	148	151	151
<b>T2</b>	Lumens	4,654	9,249	13,730	18,194	23,032	27,273	32,034	37,138	41,694
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5
	Lumens per Watt	141	147	148	150	150	150	149	152	152
<b>T2R</b>	Lumens	4,716	9,372	13,913	18,437	23,340	27,637	32,462	37,634	42,251
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4
	Lumens per Watt	143	149	150	152	152	152	151	154	154
<b>T3</b>	Lumens	4,589	9,120	13,538	17,940	22,711	26,892	31,587	36,620	41,112
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B4-U0-G4
	Lumens per Watt	139	145	146	148	147	148	147	150	150
<b>T3R</b>	Lumens	4,735	9,411	13,970	18,513	23,436	27,751	32,596	37,790	42,425
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5
	Lumens per Watt	143	149	150	153	152	152	152	155	155
<b>T4FT</b>	Lumens	4,617	9,176	13,622	18,051	22,851	27,058	31,782	36,847	41,366
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	140	146	146	149	148	149	148	151	151
<b>T4W</b>	Lumens	4,631	9,203	13,662	18,104	22,918	27,138	31,876	36,955	41,488
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	140	146	147	150	149	149	148	151	151
<b>SL2</b>	Lumens	4,619	9,180	13,627	18,058	22,860	27,069	31,795	36,861	41,383
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5
	Lumens per Watt	140	146	147	149	148	149	148	151	151
<b>SL3</b>	Lumens	4,586	9,115	13,531	17,931	22,699	26,879	31,571	36,602	41,091
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5
	Lumens per Watt	139	145	145	148	147	148	147	150	150
<b>SL4</b>	Lumens	4,529	9,002	13,363	17,708	22,417	26,544	31,178	36,146	40,580
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G4	B2-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	137	143	144	146	146	146	145	148	148
<b>5NQ</b>	Lumens	4,829	9,598	14,247	18,880	23,901	28,301	33,242	38,539	43,266
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3
	Lumens per Watt	146	152	153	156	155	155	155	158	158
<b>5MQ</b>	Lumens	4,853	9,645	14,318	18,974	24,020	28,442	33,407	38,731	43,482
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	147	153	154	157	156	156	155	159	159
<b>5WQ</b>	Lumens	4,843	9,625	14,288	18,934	23,969	28,382	33,337	38,649	43,390
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5
	Lumens per Watt	147	153	154	156	156	156	155	158	158
<b>SLL/SLR</b>	Lumens	3,989	7,927	11,768	15,594	19,741	23,375	27,456	31,831	35,736
	BUG Rating	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5
	Lumens per Watt	121	126	127	129	128	128	128	130	130
<b>RW</b>	Lumens	4,774	9,488	14,085	18,665	23,628	27,979	32,863	38,100	42,774
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3
	Lumens per Watt	145	151	151	154	153	154	153	156	156
<b>AFL</b>	Lumens	4,673	9,286	13,785	18,268	23,126	27,384	32,164	37,290	41,864
	BUG Rating	B1-U0-G1	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3
	Lumens per Watt	142	147	148	151	150	150	150	153	153

\* Nominal data for 70 CRI. \*\* For additional performance data, please reference the Galleon Supplemental Performance Guide.

SA Light Squares, Output Level 2, 4000K CCT, 70 CRI

Galleon II IES Files

Supplemental Lumen Tables

Number of Light Squares	1	2	3	4	5	6	7	8	9	
<b>Nominal Power (Watts)</b>	44	82	121	164	204	243	286	325	364	
<b>Input Current @ 120V</b>	0.367	0.689	1.014	1.378	1.704	2.027	2.393	2.716	3.041	
<b>Input Current @ 208V</b>	0.213	0.401	0.594	0.802	0.997	1.188	1.400	1.605	1.782	
<b>Input Current @ 240V</b>	0.184	0.347	0.510	0.694	0.860	1.021	1.210	1.386	1.531	
<b>Input Current @ 277V</b>	0.160	0.303	0.449	0.605	0.757	0.898	1.065	1.242	1.347	
<b>Input Current @ 347V</b>	0.125	0.235	0.355	0.471	0.592	0.710	0.828	0.958	1.065	
<b>Input Current @ 480V</b>	0.092	0.172	0.258	0.344	0.432	0.517	0.605	0.706	0.775	
<b>Optics</b>										
<b>T1</b>	Lumens	5,748	11,423	16,957	22,470	28,446	33,683	39,563	45,867	51,494
	BUG Rating	B2-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4
	Lumens per Watt	131	139	140	137	139	139	138	141	141
<b>T2</b>	Lumens	5,790	11,508	17,083	22,638	28,658	33,935	39,859	46,210	51,879
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	132	140	141	138	140	140	139	142	143
<b>T2R</b>	Lumens	5,868	11,662	17,311	22,941	29,041	34,388	40,391	46,827	52,572
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5
	Lumens per Watt	133	142	143	140	142	142	141	144	144
<b>T3</b>	Lumens	5,710	11,347	16,845	22,322	28,258	33,461	39,303	45,565	51,155
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5
	Lumens per Watt	130	138	139	136	139	138	137	140	141
<b>T3R</b>	Lumens	5,892	11,710	17,383	23,035	29,161	34,530	40,558	47,020	52,788
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	134	143	144	140	143	142	142	145	145
<b>T4FT</b>	Lumens	5,745	11,418	16,949	22,460	28,433	33,668	39,546	45,847	51,471
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	131	139	140	137	139	139	138	141	141
<b>T4W</b>	Lumens	5,762	11,451	16,999	22,526	28,517	33,767	39,662	45,982	51,622
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	131	140	140	137	140	139	139	141	142
<b>SL2</b>	Lumens	5,747	11,422	16,956	22,469	28,444	33,681	39,561	45,865	51,491
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	131	139	140	137	139	139	138	141	141
<b>SL3</b>	Lumens	5,707	11,342	16,836	22,311	28,244	33,444	39,283	45,542	51,129
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	130	138	139	136	138	138	137	140	140
<b>SL4</b>	Lumens	5,636	11,201	16,627	22,034	27,893	33,028	38,794	44,976	50,493
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G4	B2-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	128	137	137	134	137	136	136	138	139
<b>5NQ</b>	Lumens	6,009	11,942	17,727	23,492	29,739	35,214	41,362	47,953	53,835
	BUG Rating	B2-U0-G1	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3
	Lumens per Watt	137	146	147	143	146	145	145	148	148
<b>5MQ</b>	Lumens	6,039	12,001	17,816	23,609	29,887	35,389	41,568	48,191	54,103
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5
	Lumens per Watt	137	146	147	144	147	146	145	148	149
<b>5WQ</b>	Lumens	6,026	11,976	17,778	23,559	29,824	35,315	41,480	48,090	53,989
	BUG Rating	B3-U0-G1	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	137	146	147	144	146	145	145	148	148
<b>SLL/SLR</b>	Lumens	4,963	9,863	14,642	19,403	24,563	29,085	34,163	39,607	44,465
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	113	120	121	118	120	120	119	122	122
<b>RW</b>	Lumens	5,940	11,806	17,526	23,224	29,400	34,813	40,891	47,407	53,222
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4
	Lumens per Watt	135	144	145	142	144	143	143	146	146
<b>AFL</b>	Lumens	5,814	11,555	17,153	22,730	28,775	34,073	40,021	46,398	52,090
	BUG Rating	B1-U0-G1	B2-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4
	Lumens per Watt	132	141	142	139	141	140	140	143	143

\* Nominal data for 70 CRI. \*\* For additional performance data, please reference the Galleon Supplemental Performance Guide.

SA Light Squares, Output Level 3, 4000K CCT, 70 CRI

[Galleon II IES Files](#)

[Supplemental Lumen Tables](#)

Number of Light Squares		1	2	3	4	5	6	7	8	9
<b>Nominal Power (Watts)</b>		57	108	160	213	269	321	377	429	481
<b>Input Current @ 120V</b>		0.478	0.905	1.338	1.810	2.244	2.675	3.150	3.584	4.013
<b>Input Current @ 208V</b>		0.279	0.532	0.780	1.064	1.313	1.559	1.845	2.093	2.339
<b>Input Current @ 240V</b>		0.243	0.458	0.664	0.916	1.123	1.328	1.582	1.788	1.991
<b>Input Current @ 277V</b>		0.213	0.404	0.582	0.808	0.997	1.164	1.401	1.589	1.745
<b>Input Current @ 347V</b>		0.164	0.322	0.471	0.644	0.795	0.943	1.117	1.269	1.414
<b>Input Current @ 480V</b>		0.121	0.235	0.341	0.469	0.579	0.681	0.814	0.923	1.022
Optics										
<b>T1</b>	Lumens	7,101	14,113	20,950	27,763	35,146	41,616	48,882	56,671	63,623
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	125	131	131	130	131	130	130	132	132
<b>T2</b>	Lumens	7,154	14,219	21,107	27,970	35,408	41,927	49,247	57,094	64,098
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	132	132	131	132	131	131	133	133
<b>T2R</b>	Lumens	7,250	14,408	21,389	28,344	35,881	42,487	49,905	57,857	64,954
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	127	133	134	133	133	132	132	135	135
<b>T3</b>	Lumens	7,054	14,020	20,812	27,580	34,914	41,342	48,560	56,297	63,203
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	124	130	130	129	130	129	129	131	131
<b>T3R</b>	Lumens	7,280	14,468	21,477	28,461	36,029	42,663	50,111	58,096	65,222
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	128	134	134	134	134	133	133	135	136
<b>T4FT</b>	Lumens	7,098	14,107	20,941	27,751	35,130	41,598	48,860	56,646	63,594
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	125	131	131	130	131	130	130	132	132
<b>T4W</b>	Lumens	7,119	14,148	21,003	27,832	35,233	41,720	49,004	56,812	63,781
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	125	131	131	131	131	130	130	132	133
<b>SL2</b>	Lumens	7,101	14,112	20,949	27,761	35,144	41,614	48,879	56,668	63,619
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	125	131	131	130	131	130	130	132	132
<b>SL3</b>	Lumens	7,051	14,013	20,802	27,566	34,897	41,321	48,535	56,269	63,172
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	124	130	130	129	130	129	129	131	131
<b>SL4</b>	Lumens	6,963	13,839	20,543	27,223	34,463	40,808	47,932	55,569	62,386
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	122	128	128	128	128	127	127	130	130
<b>5NQ</b>	Lumens	7,424	14,755	21,903	29,025	36,743	43,508	51,104	59,247	66,515
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4
	Lumens per Watt	130	137	137	136	137	136	136	138	138
<b>5MQ</b>	Lumens	7,461	14,828	22,012	29,169	36,926	43,725	51,359	59,542	66,846
	BUG Rating	B3-U0-G1	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	131	137	138	137	137	136	136	139	139
<b>5WQ</b>	Lumens	7,445	14,797	21,966	29,108	36,849	43,633	51,250	59,417	66,705
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	131	137	137	137	137	136	136	139	139
<b>SLL/SLR</b>	Lumens	6,132	12,187	18,091	23,973	30,348	35,936	42,210	48,935	54,938
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	108	113	113	113	113	112	112	114	114
<b>RW</b>	Lumens	7,340	14,587	21,653	28,694	36,325	43,013	50,522	58,573	65,757
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	129	135	135	135	135	134	134	137	137
<b>AFL</b>	Lumens	7,183	14,276	21,193	28,084	35,552	42,098	49,448	57,327	64,359
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B4-U0-G4
	Lumens per Watt	126	132	132	132	132	131	131	134	134

\* Nominal data for 70 CRI. \*\* For additional performance data, please reference the Galleon Supplemental Performance Guide.

SA Light Squares, Output Level 4, 4000K CCT, 70 CRI

[Galleon II IES Files](#)

[Supplemental Lumen Tables](#)

Number of Light Squares		1	2	3	4	5	6	7	8	9
<b>Nominal Power (Watts)</b>		65	125	184	245	309	368	433	493	552
<b>Input Current @ 120V</b>		0.546	1.041	1.535	2.082	2.578	3.070	3.619	4.114	4.605
<b>Input Current @ 208V</b>		0.318	0.610	0.893	1.219	1.504	1.786	2.113	2.397	2.679
<b>Input Current @ 240V</b>		0.276	0.523	0.758	1.046	1.282	1.516	1.806	2.041	2.274
<b>Input Current @ 277V</b>		0.241	0.460	0.662	0.920	1.133	1.325	1.593	1.807	1.987
<b>Input Current @ 347V</b>		0.187	0.370	0.543	0.740	0.915	1.085	1.285	1.459	1.628
<b>Input Current @ 480V</b>		0.138	0.269	0.391	0.537	0.663	0.782	0.932	1.057	1.173
Optics										
<b>T1</b>	Lumens	7,814	15,529	23,053	30,549	38,672	45,793	53,787	62,358	70,007
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	120	124	125	125	125	124	124	126	127
<b>T2</b>	Lumens	7,872	15,645	23,225	30,777	38,962	46,135	54,189	62,824	70,530
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	121	125	126	126	126	125	125	127	128
<b>T2R</b>	Lumens	7,977	15,854	23,535	31,188	39,482	46,751	54,913	63,663	71,472
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	123	127	128	127	128	127	127	129	129
<b>T3</b>	Lumens	7,762	15,427	22,901	30,348	38,418	45,491	53,433	61,947	69,546
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	119	123	124	124	124	124	123	126	126
<b>T3R</b>	Lumens	8,010	15,920	23,632	31,317	39,645	46,944	55,139	63,925	71,767
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	123	127	128	128	128	128	127	130	130
<b>T4FT</b>	Lumens	7,810	15,522	23,043	30,535	38,655	45,772	53,763	62,330	69,976
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	120	124	125	125	125	124	124	126	127
<b>T4W</b>	Lumens	7,833	15,568	23,110	30,625	38,769	45,907	53,921	62,513	70,182
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	121	125	126	125	125	125	125	127	127
<b>SL2</b>	Lumens	7,813	15,528	23,052	30,547	38,670	45,790	53,784	62,354	70,003
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	120	124	125	125	125	124	124	126	127
<b>SL3</b>	Lumens	7,758	15,419	22,889	30,332	38,398	45,468	53,406	61,916	69,511
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	119	123	124	124	124	124	123	126	126
<b>SL4</b>	Lumens	7,662	15,228	22,605	29,955	37,921	44,903	52,742	61,146	68,646
	BUG Rating	B1-U0-G3	B2-U0-G3	B2-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	118	122	123	122	123	122	122	124	124
<b>5NQ</b>	Lumens	8,169	16,235	24,101	31,938	40,431	47,874	56,232	65,193	73,190
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	126	130	131	130	131	130	130	132	133
<b>5MQ</b>	Lumens	8,210	16,316	24,221	32,097	40,632	48,113	56,512	65,517	73,554
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	126	131	132	131	131	131	131	133	133
<b>5WQ</b>	Lumens	8,192	16,282	24,170	32,029	40,546	48,011	56,393	65,379	73,399
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	126	130	131	131	131	130	130	133	133
<b>SLL/SLR</b>	Lumens	6,747	13,410	19,906	26,379	33,394	39,542	46,445	53,846	60,451
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	104	107	108	108	108	107	107	109	110
<b>RW</b>	Lumens	8,076	16,050	23,826	31,574	39,970	47,329	55,592	64,450	72,356
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5
	Lumens per Watt	124	128	129	129	129	129	128	131	131
<b>AFL</b>	Lumens	7,904	15,709	23,320	30,902	39,120	46,323	54,410	63,079	70,817
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G4	B4-U0-G4
	Lumens per Watt	122	126	127	126	127	126	126	128	128

\* Nominal data for 70 CRI. \*\* For additional performance data, please reference the Galleon Supplemental Performance Guide.

SB Light Squares, Output Level 1, 4000K, 70 CRI

Number of Light Squares		1	2	3	4	5	6	7	8	9
<b>Nominal Power (Watts)</b>		31	57	85	114	142	171	199	227	256
<b>Input Current @ 120V</b>		0.263	0.484	0.717	0.952	1.201	1.434	1.685	1.918	2.151
<b>Input Current @ 208V</b>		0.154	0.280	0.420	0.552	0.700	0.839	0.979	1.119	1.259
<b>Input Current @ 240V</b>		0.136	0.245	0.370	0.483	0.615	0.740	0.860	0.985	1.110
<b>Input Current @ 277V</b>		0.122	0.216	0.330	0.425	0.546	0.660	0.762	0.876	0.989
<b>Input Current @ 347V</b>		-	-	0.248	0.328	0.413	0.495	0.577	0.665	0.743
<b>Input Current @ 480V</b>		-	-	0.182	0.238	0.304	0.364	0.426	0.493	0.547
<b>Optics</b>										
<b>T1</b>	Lumens	4,696	9,389	14,086	18,816	23,716	28,470	33,388	37,964	42,763
	BUG Rating	B2-U0-G1	B3-U0-G1	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4
	Lumens per Watt	152	164	166	165	167	167	168	167	167
<b>T2</b>	Lumens	4,704	9,404	14,109	18,846	23,754	28,515	33,442	38,024	42,831
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G5
	Lumens per Watt	152	164	167	165	168	167	168	167	168
<b>T2R</b>	Lumens	4,835	9,667	14,503	19,373	24,418	29,313	34,377	39,087	44,029
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4
	Lumens per Watt	156	169	171	170	172	172	173	172	172
<b>T3</b>	Lumens	4,751	9,497	14,249	19,033	23,989	28,798	33,773	38,401	43,256
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B4-U0-G4
	Lumens per Watt	154	166	168	167	169	169	170	169	169
<b>T3R</b>	Lumens	4,874	9,743	14,618	19,526	24,611	29,544	34,648	39,396	44,376
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5
	Lumens per Watt	158	170	173	171	174	173	174	173	174
<b>T4FT</b>	Lumens	4,692	9,380	14,074	18,799	23,694	28,444	33,358	37,929	42,724
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	152	164	166	165	167	166	168	167	167
<b>T4W</b>	Lumens	4,738	9,472	14,211	18,983	23,926	28,723	33,685	38,300	43,142
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	153	165	168	167	169	168	169	169	169
<b>SL2</b>	Lumens	4,719	9,433	14,153	18,905	23,828	28,605	33,546	38,143	42,965
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B4-U0-G4	B4-U0-G5
	Lumens per Watt	153	165	167	166	168	167	168	168	168
<b>SL3</b>	Lumens	4,640	9,276	13,916	18,589	23,430	28,127	32,986	37,506	42,247
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	150	162	164	163	165	165	166	165	165
<b>SL4</b>	Lumens	4,706	9,408	14,115	18,854	23,764	28,527	33,456	38,040	42,849
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	152	164	167	165	168	167	168	168	168
<b>5NQ</b>	Lumens	4,975	9,945	14,921	19,931	25,121	30,157	35,367	40,213	45,297
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3
	Lumens per Watt	161	174	176	175	177	176	178	177	177
<b>5MQ</b>	Lumens	4,972	9,939	14,912	19,919	25,106	30,139	35,346	40,189	45,269
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	161	173	176	175	177	176	178	177	177
<b>5WQ</b>	Lumens	4,802	9,600	14,403	19,239	24,249	29,110	34,139	38,817	43,724
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5
	Lumens per Watt	155	168	170	169	171	170	171	171	171
<b>SLL/SLR</b>	Lumens	4,730	9,457	14,188	18,952	23,887	28,676	33,630	38,238	43,072
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	153	165	168	166	169	168	169	168	169
<b>RW</b>	Lumens	4,889	9,773	14,663	19,586	24,686	29,635	34,755	39,517	44,513
	BUG Rating	B2-U0-G1	B3-U0-G1	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4
	Lumens per Watt	158	171	173	172	174	173	175	174	174
<b>AFL</b>	Lumens	4,828	9,652	14,482	19,344	24,381	29,269	34,325	39,029	43,963
	BUG Rating	B1-U0-G1	B2-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3
	Lumens per Watt	156	168	171	170	172	171	172	172	172

SB Light Squares, Output Level 2, 4000K, 70 CRI

Number of Light Squares		1	2	3	4	5	6	7	8	9
<b>Nominal Power (Watts)</b>		40	74	109	147	183	220	257	293	330
<b>Input Current @ 120V</b>		0.330	0.627	0.919	1.255	1.547	1.838	2.174	2.466	2.758
<b>Input Current @ 208V</b>		0.192	0.370	0.533	0.739	0.902	1.066	1.272	1.435	1.598
<b>Input Current @ 240V</b>		0.169	0.327	0.467	0.655	0.794	0.933	1.121	1.260	1.400
<b>Input Current @ 277V</b>		0.150	0.294	0.412	0.588	0.706	0.823	1.000	1.118	1.235
<b>Input Current @ 347V</b>		0.112	0.215	0.316	0.431	0.531	0.632	0.746	0.847	0.947
<b>Input Current @ 480V</b>		0.086	0.160	0.230	0.320	0.390	0.460	0.550	0.620	0.690
<b>Optics</b>										
<b>T1</b>	Lumens	5,895	11,786	17,683	23,620	29,771	35,739	41,913	47,656	53,681
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	148	159	162	161	163	162	163	163	163
<b>T2</b>	Lumens	5,905	11,805	17,711	23,658	29,818	35,796	41,980	47,732	53,766
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5
	Lumens per Watt	148	160	162	161	163	162	164	163	163
<b>T2R</b>	Lumens	6,070	12,135	18,206	24,319	30,652	36,797	43,154	49,067	55,270
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B4-U0-G5	B4-U0-G5
	Lumens per Watt	153	164	167	165	168	167	168	168	168
<b>T3</b>	Lumens	5,963	11,922	17,887	23,892	30,114	36,151	42,396	48,206	54,300
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5
	Lumens per Watt	150	161	164	163	165	164	165	165	165
<b>T3R</b>	Lumens	6,118	12,231	18,350	24,511	30,894	37,087	43,494	49,454	55,706
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	154	166	168	167	169	168	169	169	169
<b>T4FT</b>	Lumens	5,890	11,775	17,667	23,599	29,744	35,706	41,875	47,613	53,632
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	148	159	162	161	163	162	163	163	163
<b>T4W</b>	Lumens	5,948	11,891	17,840	23,830	30,035	36,056	42,285	48,079	54,157
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	149	161	163	162	164	164	165	164	164
<b>SL2</b>	Lumens	5,923	11,842	17,766	23,732	29,912	35,908	42,111	47,882	53,935
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5
	Lumens per Watt	149	160	163	161	164	163	164	164	164
<b>SL3</b>	Lumens	5,824	11,644	17,469	23,335	29,412	35,308	41,407	47,081	53,033
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	146	158	160	159	161	160	161	161	161
<b>SL4</b>	Lumens	5,907	11,810	17,718	23,668	29,831	35,811	41,998	47,752	53,789
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	148	160	162	161	163	162	164	163	163
<b>5NQ</b>	Lumens	6,245	12,484	18,731	25,020	31,535	37,857	44,397	50,480	56,862
	BUG Rating	B2-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4
	Lumens per Watt	157	169	172	170	173	172	173	172	173
<b>5MQ</b>	Lumens	6,241	12,477	18,719	25,005	31,516	37,834	44,370	50,450	56,827
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	157	169	171	170	173	172	173	172	172
<b>5WQ</b>	Lumens	6,028	12,051	18,080	24,151	30,440	36,542	42,855	48,728	54,887
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	151	163	166	164	167	166	167	166	167
<b>SLL/SLR</b>	Lumens	5,938	11,871	17,811	23,791	29,986	35,997	42,216	48,001	54,069
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	149	161	163	162	164	163	164	164	164
<b>RW</b>	Lumens	6,137	12,268	18,406	24,587	30,989	37,201	43,628	49,606	55,877
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	154	166	169	167	170	169	170	169	170
<b>AFL</b>	Lumens	6,061	12,117	18,179	24,283	30,606	36,742	43,089	48,993	55,187
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4
	Lumens per Watt	152	164	166	165	168	167	168	167	167

SB Light Squares, Output Level 3, 4000K, 70 CRI

Number of Light Squares		1	2	3	4	5	6	7	8	9
<b>Nominal Power (Watts)</b>		54	101	149	201	250	301	351	400	450
<b>Input Current @ 120V</b>		0.437	0.857	1.259	1.714	2.116	2.518	2.973	3.375	3.776
<b>Input Current @ 208V</b>		0.254	0.498	0.721	0.996	1.219	1.442	1.717	1.940	2.163
<b>Input Current @ 240V</b>		0.223	0.437	0.628	0.874	1.065	1.256	1.501	1.693	1.884
<b>Input Current @ 277V</b>		0.197	0.386	0.550	0.772	0.936	1.100	1.322	1.485	1.649
<b>Input Current @ 347V</b>		0.150	0.292	0.432	0.584	0.724	0.863	1.016	1.155	1.295
<b>Input Current @ 480V</b>		0.111	0.213	0.311	0.427	0.525	0.622	0.738	0.836	0.933
<b>Optics</b>										
<b>T1</b>	Lumens	7,841	15,675	23,517	31,414	39,594	47,531	55,743	63,381	71,393
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5
	Lumens per Watt	144	155	158	157	159	158	159	159	159
<b>T2</b>	Lumens	7,853	15,700	23,555	31,464	39,657	47,607	55,832	63,482	71,507
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	144	156	158	157	159	158	159	159	159
<b>T2R</b>	Lumens	8,073	16,139	24,214	32,344	40,766	48,938	57,393	65,257	73,507
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	148	160	162	161	163	163	164	163	163
<b>T3</b>	Lumens	7,931	15,856	23,789	31,776	40,051	48,080	56,386	64,112	72,217
	BUG Rating	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	146	157	160	158	161	160	161	160	161
<b>T3R</b>	Lumens	8,137	16,267	24,405	32,599	41,088	49,325	57,846	65,773	74,087
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	150	161	164	162	165	164	165	165	165
<b>T4FT</b>	Lumens	7,834	15,661	23,496	31,385	39,558	47,488	55,692	63,324	71,329
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	144	155	158	156	159	158	159	158	159
<b>T4W</b>	Lumens	7,910	15,814	23,726	31,693	39,946	47,953	56,238	63,944	72,027
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	145	157	159	158	160	159	160	160	160
<b>SL2</b>	Lumens	7,878	15,749	23,629	31,562	39,781	47,756	56,006	63,681	71,731
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	145	156	158	157	159	159	160	159	159
<b>SL3</b>	Lumens	7,746	15,486	23,234	31,035	39,117	46,958	55,070	62,616	70,532
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	142	153	156	155	157	156	157	157	157
<b>SL4</b>	Lumens	7,857	15,707	23,565	31,477	39,674	47,627	55,855	63,509	71,538
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	144	156	158	157	159	158	159	159	159
<b>5NQ</b>	Lumens	8,305	16,604	24,911	33,275	41,940	50,348	59,046	67,137	75,624
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	153	165	167	166	168	167	168	168	168
<b>5MQ</b>	Lumens	8,300	16,594	24,896	33,255	41,915	50,318	59,010	67,097	75,578
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	153	164	167	166	168	167	168	168	168
<b>5WQ</b>	Lumens	8,017	16,027	24,046	32,120	40,484	48,600	56,996	64,806	72,998
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	147	159	161	160	162	162	163	162	162
<b>SLL/SLR</b>	Lumens	7,897	15,788	23,687	31,641	39,880	47,875	56,146	63,839	71,909
	BUG Rating	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	145	156	159	158	160	159	160	160	160
<b>RW</b>	Lumens	8,162	16,317	24,480	32,699	41,215	49,476	58,024	65,975	74,315
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5
	Lumens per Watt	150	162	164	163	165	164	166	165	165
<b>AFL</b>	Lumens	8,061	16,115	24,177	32,295	40,705	48,865	57,307	65,160	73,397
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G4
	Lumens per Watt	148	160	162	161	163	162	164	163	163

SB Light Squares, Output Level 4, 4000K, 70 CRI

Number of Light Squares	1	2	3	4	5	6	7	8	9	
<b>Nominal Power (Watts)</b>	80	148	218	294	365	440	513	585	658	
<b>Input Current @ 120V</b>	0.638	1.234	1.840	2.469	3.094	3.680	4.349	4.934	5.519	
<b>Input Current @ 208V</b>	0.367	0.705	1.045	1.410	1.779	2.090	2.513	2.824	3.135	
<b>Input Current @ 240V</b>	0.320	0.614	0.913	1.227	1.567	1.827	2.220	2.480	2.740	
<b>Input Current @ 277V</b>	0.280	0.537	0.813	1.075	1.402	1.626	1.992	2.215	2.439	
<b>Input Current @ 347V</b>	0.219	0.430	0.640	0.897	1.089	1.280	1.537	1.729	1.920	
<b>Input Current @ 480V</b>	0.160	0.313	0.479	0.700	0.829	0.958	1.179	1.308	1.437	
<b>Optics</b>										
<b>T1</b>	Lumens	10,654	21,299	31,955	42,684	53,800	64,585	75,742	86,121	97,008
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	134	144	147	145	147	147	148	147	147
<b>T2</b>	Lumens	10,671	21,333	32,006	42,752	53,886	64,688	75,863	86,258	97,162
	BUG Rating	B2-U0-G2	B3-U0-G3	B4-U0-G4	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	134	145	147	146	148	147	148	147	148
<b>T2R</b>	Lumens	10,969	21,929	32,901	43,948	55,392	66,496	77,984	88,670	99,879
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	138	149	151	150	152	151	152	152	152
<b>T3</b>	Lumens	10,777	21,545	32,324	43,177	54,420	65,329	76,616	87,114	98,127
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	135	146	148	147	149	148	149	149	149
<b>T3R</b>	Lumens	11,056	22,103	33,161	44,295	55,830	67,022	78,600	89,371	100,668
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	139	150	152	151	153	152	153	153	153
<b>T4FT</b>	Lumens	10,644	21,280	31,926	42,646	53,751	64,526	75,674	86,043	96,920
	BUG Rating	B2-U0-G3	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	134	144	146	145	147	147	148	147	147
<b>T4W</b>	Lumens	10,748	21,488	32,239	43,063	54,277	65,158	76,414	86,885	97,869
	BUG Rating	B2-U0-G2	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	135	146	148	147	149	148	149	149	149
<b>SL2</b>	Lumens	10,704	21,400	32,106	42,886	54,054	64,890	76,100	86,528	97,467
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	134	145	147	146	148	147	148	148	148
<b>SL3</b>	Lumens	10,525	21,042	31,570	42,169	53,151	63,805	74,828	85,082	95,837
	BUG Rating	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	132	143	145	144	146	145	146	145	146
<b>SL4</b>	Lumens	10,675	21,342	32,020	42,771	53,908	64,715	75,895	86,295	97,204
	BUG Rating	B2-U0-G3	B3-U0-G4	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	134	145	147	146	148	147	148	148	148
<b>5NQ</b>	Lumens	11,285	22,561	33,849	45,214	56,988	68,412	80,230	91,224	102,756
	BUG Rating	B3-U0-G1	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	142	153	155	154	156	155	156	156	156
<b>5MQ</b>	Lumens	11,278	22,547	33,828	45,187	56,954	68,371	80,182	91,169	102,694
	BUG Rating	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	142	153	155	154	156	155	156	156	156
<b>5WQ</b>	Lumens	10,893	21,778	32,673	43,644	55,009	66,037	77,445	88,057	99,189
	BUG Rating	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	137	148	150	149	151	150	151	151	151
<b>SL/SLR</b>	Lumens	10,731	21,453	32,186	42,993	54,189	65,051	76,290	86,743	97,709
	BUG Rating	B2-U0-G3	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	135	145	148	146	149	148	149	148	148
<b>RW</b>	Lumens	11,090	22,171	33,263	44,431	56,001	67,228	78,842	89,645	100,978
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	139	150	153	151	153	153	154	153	153
<b>AFL</b>	Lumens	10,953	21,897	32,852	43,882	55,309	66,397	77,868	88,538	99,730
	BUG Rating	B2-U0-G1	B3-U0-G2	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	138	148	151	149	152	151	152	151	152

## Control Options

### 0-10V (DIM)

This fixture is offered standard with 0-10V dimming driver(s). The DIM option provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

### Photocontrol (BPC, PR and PR7)

Optional button-type photocontrol (BPC) and photocontrol receptacles (PR and PR7) provide a flexible solution to enable "dusk-to-dawn" lighting by sensing light levels. Advanced control systems compatible with NEMA 7-pin standards can be utilized with the PR7 receptacle.

### After Hours Dim (AHD)

This feature allows photocontrol-enabled luminaires to achieve additional energy savings by dimming during scheduled portions of the night. The dimming profile will automatically take effect after a "dusk-to-dawn" period has been calculated from the photocontrol input. Specify the desired dimming profile for a simple, factory-shipped dimming solution requiring no external control wiring. Reference the After Hours Dim supplemental guide for additional information.

### Dimming Occupancy Sensor (SPB and MS/DIM-LXX)

These passive infrared (PIR) sensors are factory installed in the luminaire housing. When the SPB (FSP-321 or FSP-311) or MS/DIM (FSP-211) sensor options are selected, the occupancy sensor is connected to a dimming driver and the luminaire dims when no motion is detected. After a set period of time, the luminaire turns off, and when motion is detected, the luminaire returns to full light output. Both sensors are factory preset to dim down to approximately 10% power with a time delay of five minutes. The MS/DIM sensor requires the FSIR-100 programming tool to adjust factory defaults. The SPB sensor default parameters are listed in the table below and can be configured utilizing the Sensor Configuration mobile application for iOS and Android devices. The SPB/X is configured to control only the specified number of light squares (See SPB/X Availability Table below.) An integral photocontrol can be activated with the app for "dusk-to-dawn" control or daylight harvesting - the factory default is off. Four sensor colors are available; Bronze, Black, Gray and White, and are automatically selected based on the luminaire finish as indicated by the table below.

SPB sensor finish matched to luminaire finish		
Luminaire Finish		SPB Sensor Finish*
WH	White	White
BK	Black	Black
GM	Graphite Metallic	Black
BZ	Bronze	Bronze
AP	Gray	Gray
DP	Dark Platinum	Gray

\*SPB bezel color automatically selected based on luminaire finish

SPB/X Availability Table	
Fixture Square Count	Available SPB/X Square Count
1	Not Available
2	Not Available
3	Not Available
4	2
5	2 or 3
6	3
7	2, 3, 4 or 5
8	2, 3, 5 or 6
9	3 or 6



### Default Program Settings (Out of the Box Functionality)

Occupancy Sensor				
Setting	MS/DIM	SPB	WaveLinX Lite (WLS4 / WLS2)	WaveLinX (WPS)
High Mode %	100%	100%	100%	100%
Low Mode %	10%	10%	50%	50%
Time Delay	5 min	5 min	15 min	15 min
Cut Off Delay	1 hr	1 hr	Disabled	Disabled
Photocell Enabled	No	No	Yes	Yes



### WaveLinX Wireless Control and Monitoring System

Operates on a wireless mesh network based on IEEE 802.15.4 standards enabling wireless control of outdoor lighting. WaveLinX (WPS2 to WPS4) outdoor wireless sensors offer passive infrared (PIR) occupancy and photocell for closed loop daylight harvesting. Sensors are factory preset to dim down to 50% after 15 minutes of no motion detected. Two lens options are available for mounting heights of 7' to 40'. Use the WaveLinX mobile application for set-up and configuration. At least one Wireless Area Controller (WAC) is required for full functionality and remote communication (including adjustment of any factory pre-sets). WaveLinX Lite (WLS4 and WLS2) outdoor wireless sensors provide PIR occupancy and photocell for closed loop daylight harvesting. Sensors are factory preset to dim down to 50% after 15 minutes of no motion detected. Two lens options are available for mounting heights of 7' to 40'. Use the WaveLinX Lite mobile application for set-up and configuration. WAC not required. WaveLinX Outdoor Control Module (WOLC-7P-10A) accessory provides a photocontrol enabling astronomical or time-based schedules to provide ON, OFF and dimming control of fixtures utilizing a 7-PIN receptacle. The out-of-box functionality is ON at dusk and OFF at dawn.

#### For mounting heights up to 15' (WPS2 and WLS2)

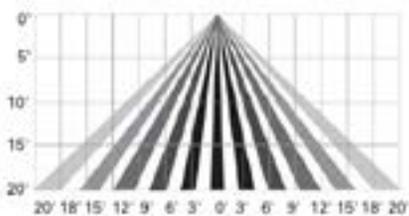

#### For mounting heights up to 40' (WPS4 and WLS4)

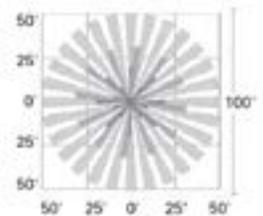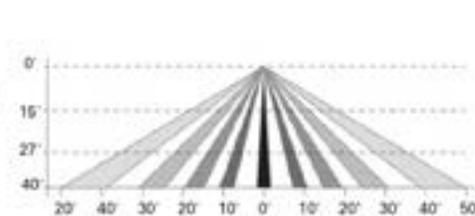

### AirMesh (DIM10)

AirMesh integrated wireless controls system includes factory installed DIM10 Synapse control module and FSP-201 motion sensor; requires additional AirMesh components for operation. Contact Synapse at [www.synapsewireless.com](http://www.synapsewireless.com) for product support, warranty and terms and conditions.