

J.G.S.

LANDSCAPE ARCHITECTS

planning/construction
consulting/management

708.361.5124

June 24, 2013

Village of Orland Park
14700 Ravinia Ave
Orland Park, Illinois 60462
708-403-6100

Pedestrian Bridge Wall
Install

Landscaping
TBA

Deliver and perform the following items and services as specified per plan :

1. Remove designated items not to remain including weeds and debris.
2. Spray designated vegetation with contact herbicide.
3. Finish grade terrace areas with 100 c.y. of amended top soil to meet required elevations.
4. Plant following items in amended soil:

A.	187	1g	Lesser Calamintha	125	1 g	Purple Pica Bella Coneflower
	280	1 g	Purple Kobold Liatris	83	1g	Blue Haven Little Bluestem
	127	3g	Climbing Hydrangea			

B.	210	1g	Lesser Calamintha	150	1 g	Purple Pica Bella Coneflower
	317	1 g	Purple Koald Liatris	99	1g	Blue Haven Little Bluestem

5. Spread 30 c.y. of shredded bark mulch in beds areas.
6. Remove all debris from site

Total costs: A. 18,850.00 B. \$ 14,925.00

Terms: 1/3 deposit and remainder at completion

The above work and fees are acceptable and services are hereby authorized to be performed as specified.

Client: _____ Date: _____ JGS Rep: _____ Date: _____

All work / material guaranteed for one year from completion date unless project damaged, not paid in full upon final billing or specified otherwise.

7751 McCarthy Road, Palos Park, Illinois 60464
Fx 708.361.4917/jesland@sbcglobal.net/www.jgslandscapearchitects.com

MID AMERICA TREE & LANDSCAPE, INC.
P.O. Box 347
Mokena, IL 60448
708/479-7510
fax/479-9493

PROPOSAL

TO: Village of Orland Park
14700 S. Ravinia Ave.
Orland Park, IL 60462

June 25, 2013

JOB: Pedestrian Bridge Walk


We hereby propose to furnish materials and labor necessary for the completion of the following:

210	Lesser Calamintha	1 gal.
150	Pixi Meadow Bright Coneflower	1 gal.
317	Kobold Liatris	1 gal.
99	Little Blue Stem	2 gal.

We propose hereby to furnish material and labor to complete work in accordance with above specifications for the sum of: Eight Thousand Nine Hundred Seventy Seven & 00/100 (\$8,977.00)

Payment is due in full upon completion of work. This proposal may be withdrawn by us if not accepted within 15 days.

Authorized Signature:



ACCEPTED: The above prices, specifications and conditions are satisfactory and are hereby accepted. You are authorized to do the work as specified. Payment will be made as outlined above.

Date:

Signature:

Plant List


OPTION 1

ABBRV.	LATIN NAME	COMMON NAME	QUANTITY	SIZE & SHAPE
PERENNIALS				
CNN	Calamintha nepeta ssp. Nepeta	LESSER CALAMINTHA	187	1 GAL. 15"O.C. 40%
EPB	Echinacea purpurea 'Pica Bella'	PICA ELLA CONEFLOWER	125	1 GAL. 18"O.C. 60%
LKG	Liatris 'Kobold'	KOBOLD GAYFEATHER	280	1 GAL. 15"O.C. 60%
SBL	Schizachyrium Blue Heaven Little Blue Stem	SCHIZACHYRIUM SCOPARIUM 'MINNBLUEA'	83	1 GAL. 18"O.C. 60%
VINES				
HAP	Hydrangea anomala ssp. Petiolaris	CLIMING HYDRANGEA	127	#3 6' O.C.


OPTION 2

ABBRV.	LATIN NAME	COMMON NAME	QUANTITY	SIZE & SHAPE
PERENNIALS				
CNN	Calamintha nepeta ssp. Nepeta	LESSER CALAMINTHA	210	1 GAL. 15"O.C. 40%
EPB	Echinacea purpurea 'Pica Bella'	PICA ELLA CONEFLOWER	150	1 GAL. 18"O.C. 60%
LKG	Liatris 'Kobold'	KOBOLD GAYFEATHER	317	1 GAL. 15"O.C. 60%
SBL	Schizachyrium Blue Heaven Little Blue Stem	SCHIZACHYRIUM SCOPARIUM 'MINNBLUEA'	99	1 GAL. 18"O.C. 40%


Option 1 - Includes Vines

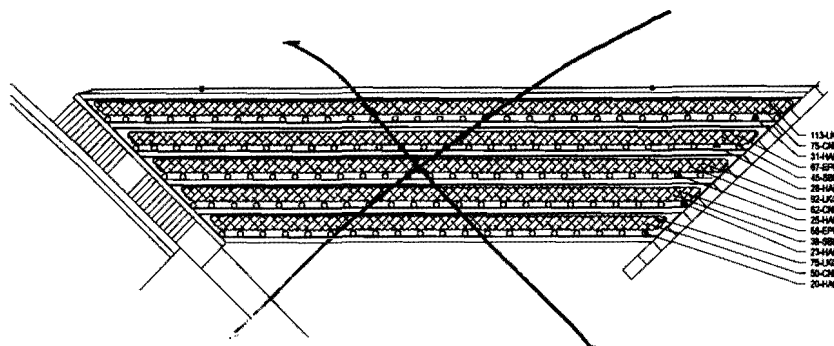

Option 2 - Does Not Include Vines

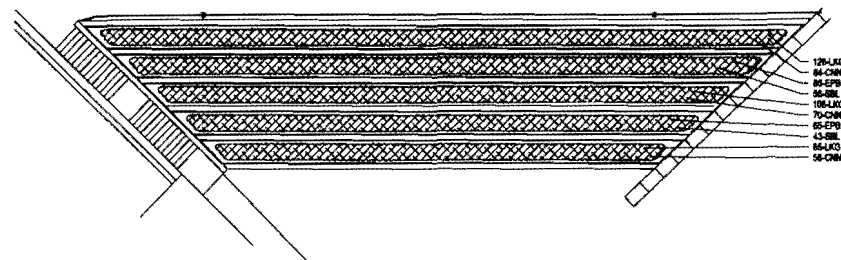

Planting Details



Notes

1. The Landscape Contractor shall be responsible for installing materials and plants shown on the landscape plan.
2. All nursery stock will be well branched, healthy, ML, pre-insulated and fertilized. 3. All nursery stock shall be guaranteed, by the contractor, for one year from date of final inspection.
4. Clean white earth will be provided and graded by the General Contractor up to 18 inches below finished grade in planting areas.
5. Soil shall be amended with 25% sphagnum peat moss, 10% humus and 80% pulverized soil for all perennial beds.
6. Double shredded hardwood mulch shall be applied three inches in depth to all perennial beds. Mulch shall not contain any form of other species.
7. A chemical weed preventative barrier shall be applied in all weed mulch areas.
8. Local Utilities will need to be contacted before any type of work is done on the site.
9. Do not disturb paving, lighting, landscaping, irrigation and/or fencing that is adjacent to the site or on the site to remain. The contractor is responsible for the cost to repair such areas if damaged.
10. The contractor shall report any discrepancies in plan vs field conditions in writing immediately to the owner representative prior to continuing with that portion of the work.
11. Intersperse perennials of each species in groups of 3, 5, or 7 to create a random grouping.

Plant List

OPTION 1					
ABBRV.	LATIN NAME	COMMON NAME	QUANTITY	SIZE & SHAPE	
PERENNIALS					
CNN	Calamintha nepeta ssp. Nepeta	LESSER CALAMINTHA	187	1 GAL. 15" O.C. 40%	
EPB	Echinacea purpurea 'Pica Bella'	PICA BELLA CONEFLOWER	125	1 GAL. 18" O.C. 80%	
LKG	Liatris 'Tobolt'	KOBOLD GAYFEATHER	280	1 GAL. 15" O.C. 80%	
SEL	Schizachyrium Blue Heaven Little Blue Stem	SCHIZACHYRIUM SCOPARUM 'MINNELUEA'	83	1 GAL. 18" O.C. 60%	
VINES					
HAP	Hydrangea arborescens, Petalstar	CLIMBING HYDRANGEA	127	80 6" O.C.	
OPTION 2					
ABBRV.	LATIN NAME	COMMON NAME	QUANTITY	SIZE & SHAPE	
PERENNIALS					
CNN	Calamintha nepeta ssp. Nepeta	LESSER CALAMINTHA	210	1 GAL. 15" O.C. 40%	
EPB	Echinacea purpurea 'Pica Bella'	PICA BELLA CONEFLOWER	150	1 GAL. 18" O.C. 80%	
LKG	Liatris 'Tobolt'	KOBOLD GAYFEATHER	317	1 GAL. 15" O.C. 80%	
SEL	Schizachyrium Blue Heaven Little Blue Stem	SCHIZACHYRIUM SCOPARUM 'MINNELUEA'	99	1 GAL. 18" O.C. 40%	