


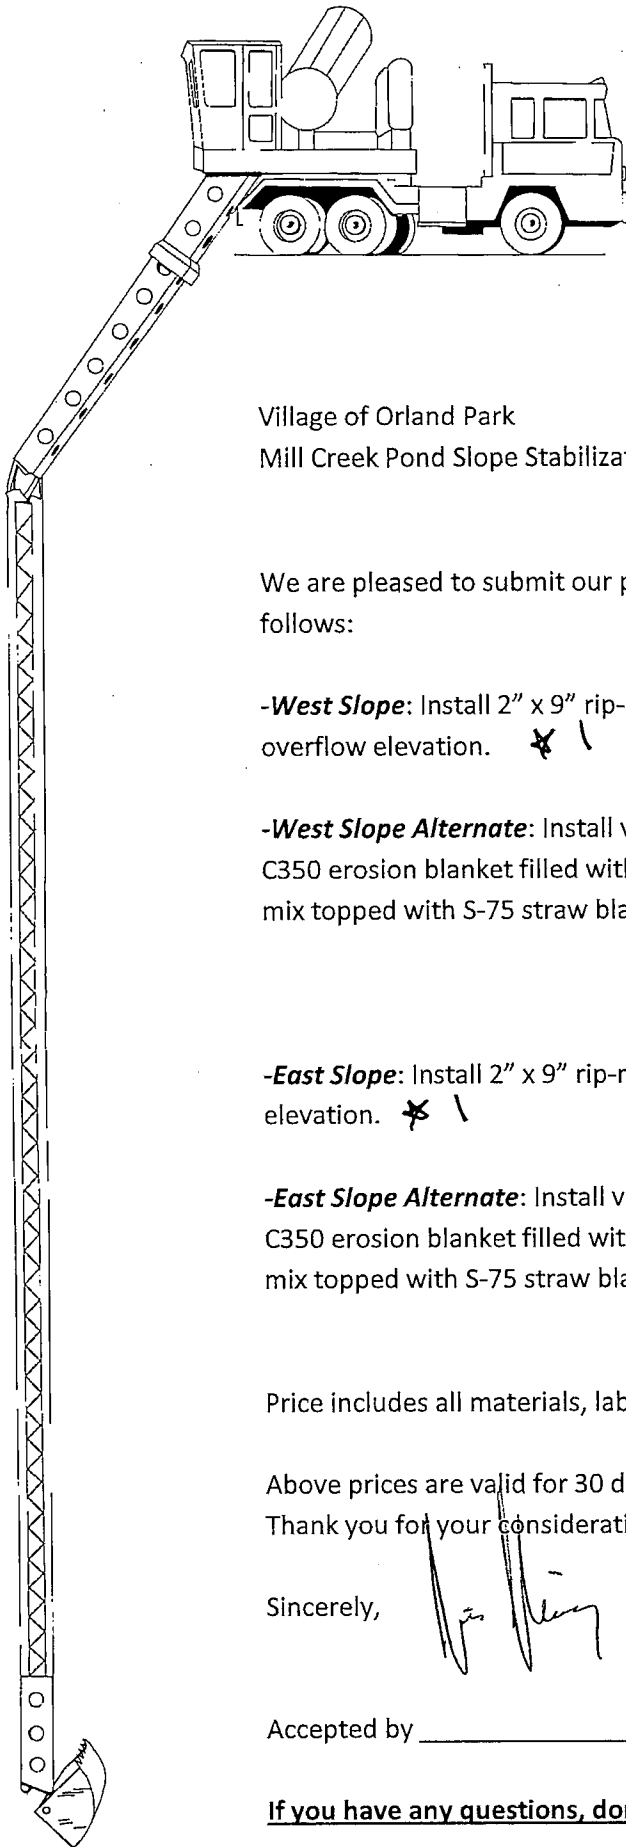

THORNTON EQUIPMENT SERVICES, INC.

(708) 479-7531

Fax (708) 479-7591

Gradall Rental • Specialized Excavating

Village of Orland Park
Mill Creek Pond Slope Stabilization

Oct. 19, 2015

We are pleased to submit our proposal to stabilize the slopes of Mill Creek Pond as follows:

-West Slope: Install 2" x 9" rip-rap on filter fabric to the top of the cut bank at overflow elevation. * 1 150' @ \$75.00 per lf. = \$11,250.00

-West Slope Alternate: Install vegetated rock bank using filter fabric filled with rip-rap, C350 erosion blanket filled with topsoil, seeded with IDOT Class 3 slope stabilization mix topped with S-75 straw blanket * 2 150' @ \$112.50 per lf. = \$16,875.00

-East Slope: Install 2" x 9" rip-rap on filter fabric to the top of the cut bank at overflow elevation. * 1 150' @ \$75.00 per lf. = \$11,250.00

-East Slope Alternate: Install vegetated rock bank using filter fabric filled with rip-rap, C350 erosion blanket filled with topsoil, seeded with IDOT Class 3 slope stabilization mix topped with S-75 straw blanket * 2 150' @ \$112.50 per lf. = \$16,875.00

Price includes all materials, labor, equipment, mobilization and supervision.

Above prices are valid for 30 days.


Thank you for your consideration.

Sincerely,

Accepted by _____ date

If you have any questions, don't hesitate to call Jim Sr. at 708-774-8751.

Rip-RAP and FILTER FABRIC STRUCTURE

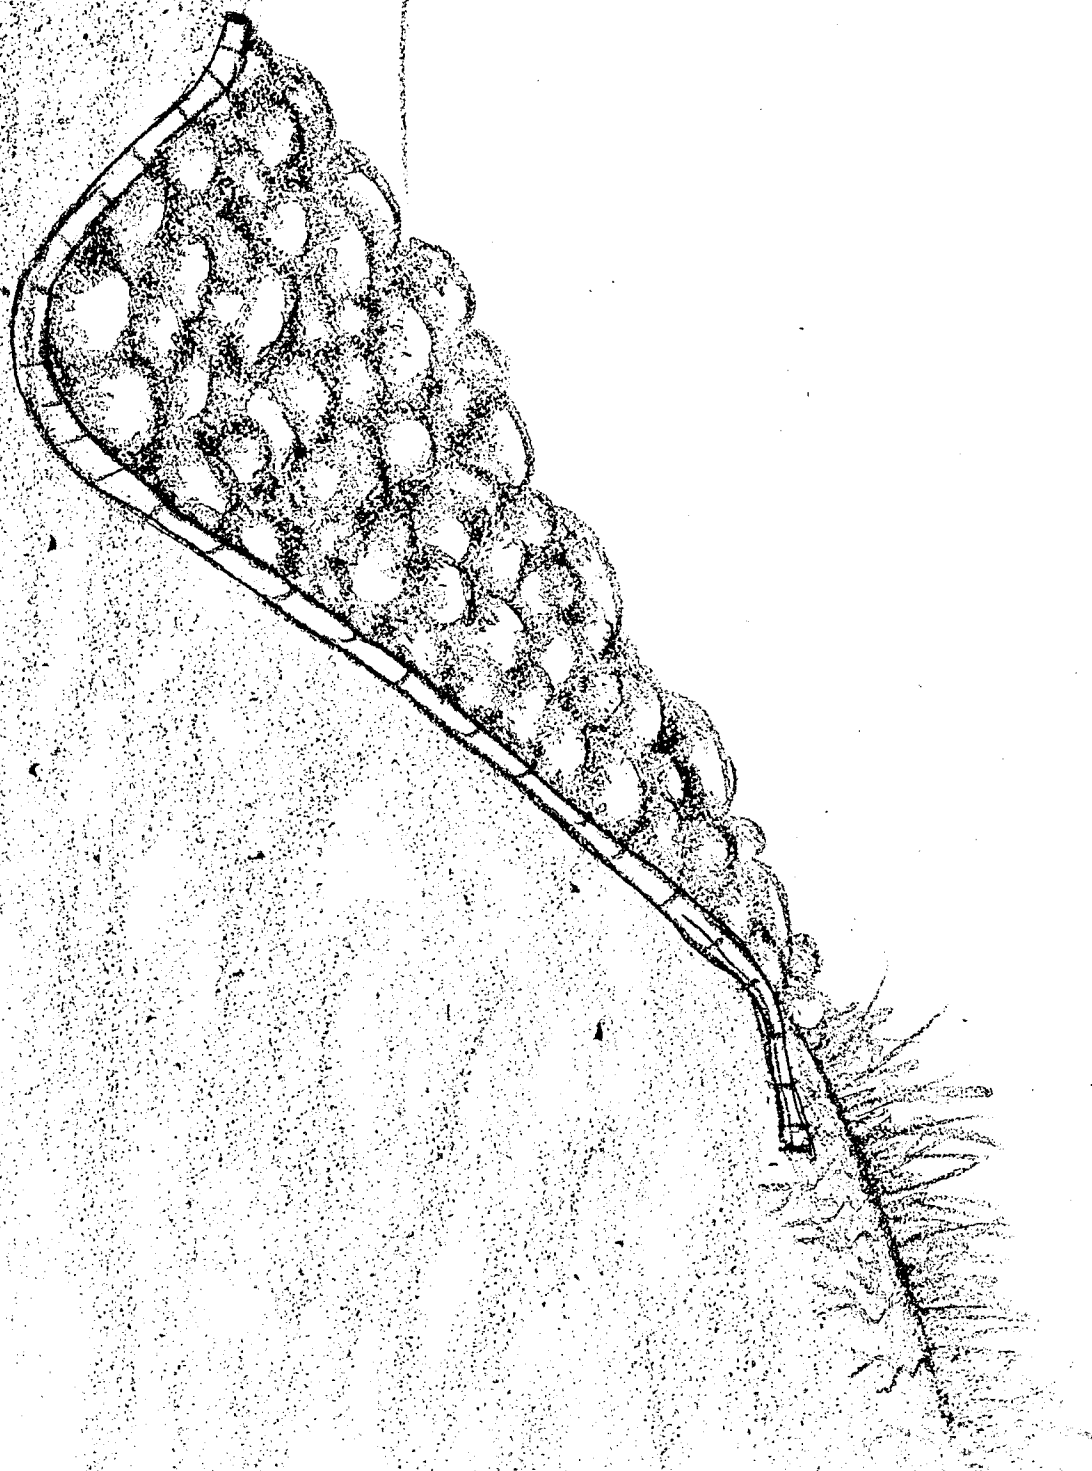

VEGETATED RIP-RAP STRUCTURE (ALTERNATE)

