



ORLAND PARK

RFP #24-056

Centennial Park Backstop Improvement

PROJECT DETAILS

Scope of Work

The selected contractor must remove the existing dome back section only. The selected contractor is responsible for the removal of all scrap materials and is responsible for the disposal of scrap materials.

The selected contractor must provide and install new backstops that meet the following specifications. The new backstops must be black vinyl coated chain link fencing that is 10ft high. The backstops must also have 30' tall netting system above the 10' tall chain link fence.

10' Fence Details:

- Posts must be 3" OD
- Top, middle and bottom rails with a 2" OD
- Bottom rail shall be a max of 2" above finished grade
- 2" Mesh with 6 gauge wire
- Fencing pole foundations typically

30' Backstop Netting Detail:

- Net shall be 30' high from the top of the 10' fence
- Netting shall be 1-3/4" Black Notted Weather Treated Square Baseball Netting
- Netting shall be attached to the 10' fencing with spring loaded zinc snaps and heavy duty tie wraps
- Netting posts shall be appropriate size and OD to properly support the above specifications
- Netting posts shall be black stryk coated steel (for netting system)

LOCATION OF WORK AND SPECIFICATIONS:

The project location is Centennial Park at 15300 West Ave, Orland Park IL 60462 fields 6 thru 9.

The Proposal Specifications for this RFP #24-056 are attached as *Exhibit A*.


Exhibit A - Fencing and Netting Details.



ORLAND PARK

RFP #24-056

Centennial Park Backstop Improvement

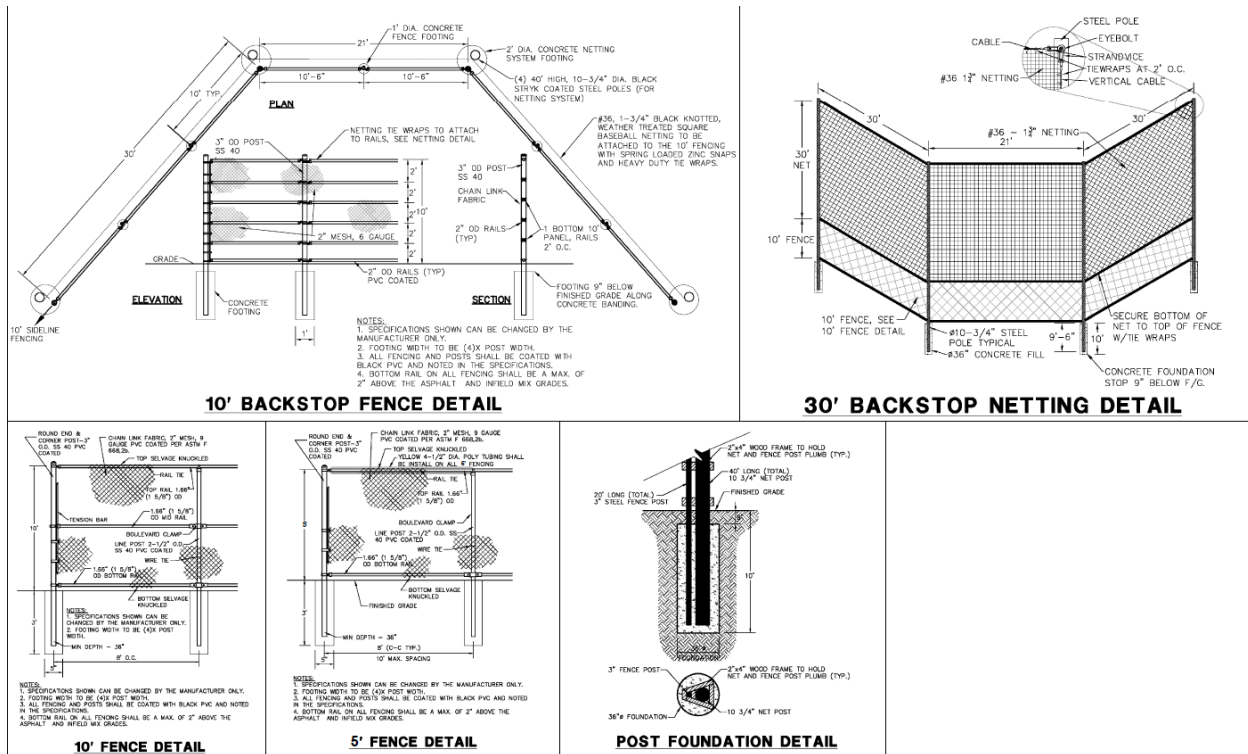



ORLAND PARK

RFP #24-056

Centennial Park Backstop Improvement



It is expressly understood and agreed to by both Parties that in no event shall the total amount to be paid by the Village for the complete and satisfactory performance of services, exceed the proposed amount. Said price shall be the total compensation for Contractor's performance hereunder including, but not limited to, all work, deliverables, materials, supplies, equipment, subcontractor's fees, and all reimbursable travel and miscellaneous or incidental expenses to be incurred by Contractor. In the event the Contractor incurs cost in excess of the sum authorized for service, the Contractor shall pay such excess from its own funds, and the Village shall not be required to pay any part of such excess, and the Contractor shall have no claim against the Village on account thereof. For the avoidance of doubt, in no event shall Contractor be entitled to receive more than the proposed amount and this amount includes all costs incurred by Contractor in connection with the work and services authorized hereby, including, but not limited to: (i) any known or unknown and/or unexpected condition(s); (ii) any and all unforeseen difficulties; (iii) any



ORLAND PARK

RFP #24-056

Centennial Park Backstop Improvement

unanticipated rises in the cost of labor, materials or equipment, changes in market or negotiating conditions, and errors or omissions made by others; (iv) the character of the work and/or services to be performed; and (v) any overrun in the time or cost necessary for the Contractor to complete the work due to any causes, within or beyond its control. Under no circumstances shall the Village be liable for any additional charges if Contractor's actual costs and reimbursable expenses for such work, service or deliverable exceed the proposed amount. Accordingly, Contractor represents, warrants and covenants to the Village that it will not, nor will Contractor have anyone on its behalf, attempt to collect an amount in excess of the proposed amount agreed to by the Contractor.