



Quote 108834-01

January 16, 2014

VILLAGE OF ORLAND PARK
ATTN: ACCOUNTS PAYABLE
ORLAND PARK
Illinois
60462

Attention: TOM MORGAN

Dear Tom,

We would like to thank you for your interest in our company and our products, and are pleased to quote the following for your consideration.

CATERPILLAR Model: 924K SMALL WHEEL LOADER

STOCK NUMBER: X2593 SERIAL NUMBER: 0PWR02292 YEAR: 2014

We wish to thank you for the opportunity of quoting on your equipment needs. This quotation is valid for 30 days, after which time we reserve the right to re-quote. If there are any questions, please do not hesitate to contact me.

Sincerely,

Dan Buck

Dan Buck
Machine Sales Representative

CATERPILLAR Model: 924K SMALL WHEEL LOADER

STANDARD EQUIPMENT


POWERTRAIN - Axle seal guards - Brake/decelerator pedal - Caterpillar C6.6 ACERT engine - Tier 4/Stage 3B compliant - Turbocharged and aftercooled - Filtered crankcase breather - Diesel particulate filter - Coolant protection to -34C (-29F) - Differential lock in front axle - Differential rear open - Dry type air cleaner - Enclosed wet disc full hydraulic brakes - Fuel priming pump, Automatic - Fuel water separator - Hydraulically driven demand cooling fan - Hydrostatic transmission with electronic - speed range control (4 speed ranges) - Rimpull control - Creeper control - Lubed for life driveshaft's - Parking brake, Electric - Single plane cooling system with remote - coolant reservoir - SOS port. Engine, Coolant, Transmission Oil - Thermal starting aid (Glow plugs) - Throttle lock - Transmission directional control on - implement joystick - Transmission sight gauge - Heavy duty hydraulic cooler

HYDRAULICS - Heavy duty hydraulic cooler - Hydraulic diagnostic connectors and - SOS ports - Hydraulic sight gauge, Visible - Load sensing hydraulics and steering - Seat mounted hydraulic controls with FNR

ELECTRICAL - 115A heavy duty alternator - 12v power supply in cab (2) - 2 x 1000 CCA batteries - 24 volt system - Back up alarm - Battery disconnect switch - Beacon ready - Diagnostic connector - Directional signals front and rear - Emergency shutdown switch - Halogen work lights front and rear - Heavy duty gear reduction starter - LED rear stop tail turn lights - Remote jump start post - Resettable main and critical - function breakers - Rooding lights front and rear - 3 in (75mm) retractable seatbelt

OPERATOR ENVIRONMENT - 3 in (75mm) retractable seatbelt - Automatic temperature control - Cab. enclosed ROPS/FOPS pressurized - and sound suppressed - Cup holder - External heated mirrors - Ground level cab door release - Gauges - Digital direction indicator - Digital hour meter and odometer - Digital speedometer - Engine coolant temperature gauge - Fuel level indicator - Hydraulic oil temperature gauge - Tachometer - Hydraulic control lockout - Interior cab lighting door and dome - Interior rear view mirrors (2) - Lunch box storage - Operator warning system indicators - Radio ready inc. speakers - Rear window defrost, Electric - Removable floor mat - Seat mounted electronic implement - controls. Adjustable - Sliding glass on the side windows - Steering column mounted multi function - control. Lights wipers turn signal - Suspension seat, Fabric - Tilt and telescope steering wheel - Tinted front glass - Wet arm wiper washer 2 speed and - intermittent front - Wet arm wiper washer, Rear


OTHER STANDARD EQUIPMENT - Automatic bucket / fork positioner. - In cab adjustable - Automatic lift and bucket kickouts. - In cab adjustable - Fenders - Large-access enclosure doors with - adjustable close/open force - Parallel lift loader linkage with - sealed pins - Recovery hitch with pin - Remote mounted lubrication points - Toolbox, Lockable - Vandalism protection: - Lockable compartments

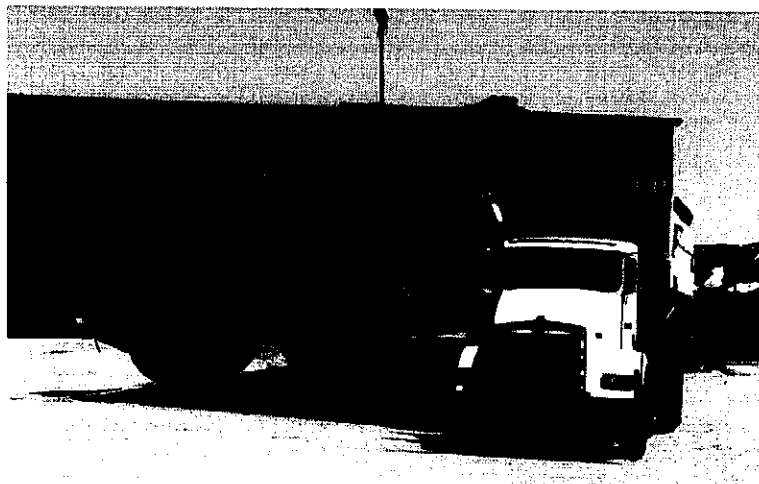


MACHINE SPECIFICATIONS

Description	Reference No
924K WHEEL LOADER	333-6522
PREP PACK, UNITED STATES	349-7850
HYD,3V,COUPLER READY,STD LIFT	366-8173
STEERING, STANDARD	333-6850
DIFFERENTIAL, OPEN REAR	333-6528
ENVIRONMENT, STANDARD	366-8125
WEATHER, COLD START 120V	366-8129
CAB, DELUXE	342-0200
SEAT, DELUXE	342-0110
FENDERS, STANDARD	366-8148
COUNTERWEIGHT, STANDARD	348-2579
RIDE CONTROL	384-6282
LIGHTS, AUX, HALOGEN / HALOGEN	333-1427
TOOLBOX GROUP	347-8059
JUMPER LINES, 3RD FUNCTION	333-6962
TIRES, 20.5-R25, MXL, L3	376-0827
ANTIFREEZE, -50C (-58F)	0P-2407
KIT,SERIALIZED TECHNICAL MEDIA	0P-2491
LANE 2 ORDER	0P-9002
SHIPPING/STORAGE PROTECTION	0P-2266
PACK, DOMESTIC TRUCK	0P-0210
INLAND FREIGHT	0P-0411
RADIO READY, BLUETOOTH,MIC,AUX	378-0951
BUCKET-GP, 2.75 CYD (QC)	141-2303
QUICK COUPLER, HORIZONTAL PIN	395-0329

QUICK COUPLER, HORIZONTAL PIN

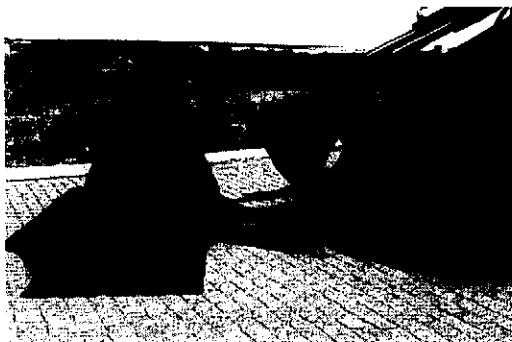

2.75 CUBIC YARD HPL BUCKET

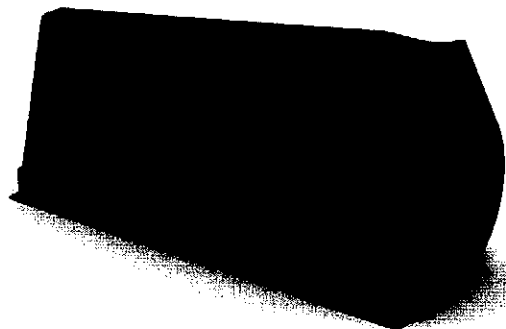

2014 Caterpillar List Price	\$195,128.00
FREIGHT & DEALER PREP	\$3,918.00
LABOR TO REMOVE & INSTALL COUPLERS	\$655.00
LOAD RITE L-2180	\$8,995.00
PARTS MANUAL	\$118.67
SERVICE MANUAL	\$1,215.17
ADDITIONAL OPERATORS MANUAL	\$57.25
MOTOROLA 2-WAY RADIO INSTALLATION	\$141.00
NJPA GOVERNMENTAL DISCOUNT	(\$70,508.00)
GOVERNMENTAL EXEMPT (0%)	\$0.00
After Tax Balance	\$139,720.09

WARRANTY

Standard Warranty: 12 Months/Unlimited Hours Full Machine

F.O.B./TERMS

Village of Orland Park Yard

ADDITIONAL CONSIDERATIONS

Options to Add Extended Warranties: You have the option to add extended machine warranty. We can tailor these options available to you however you want. Just tell us what you need and we will do our best to meet or exceed your expectations. Here are just a few examples of some Extended Warranty options:

- 12 Months or 1,000 Hours Powertrain Add \$170.00
- 12 Months or 1,000 Hours Powertrain & Hydraulics Add \$340.00
- 24 Months or 2,000 Hours Powertrain Add \$250.00
- 24 Months or 2,000 Hours Powertrain & Hydraulics Add \$510.00

Some exclusion applies, Please contact your Patten Sales Representative for complete details.

Load Rite L-2180 Load Measuring System
Includes Installation & Training at Your Site By Load Rite



Parts Manual (SEBP-5135)
Service Manual (UENR-0275)
Additional Owners and Operators Manual (SEBU-8720)

- Delivery is 4-6 weeks (Work Tools)

Accepted by _____ on _____

Signature

