




June 23, 2015

PRESENTS THE FOLLOWING PROPOSAL FOR A

VACTOR[®]
Subsidiary of Federal Signal Corporation

**2100 PLUS COMBINATION SEWER CLEANER
BUILT IN STREATOR, IL**

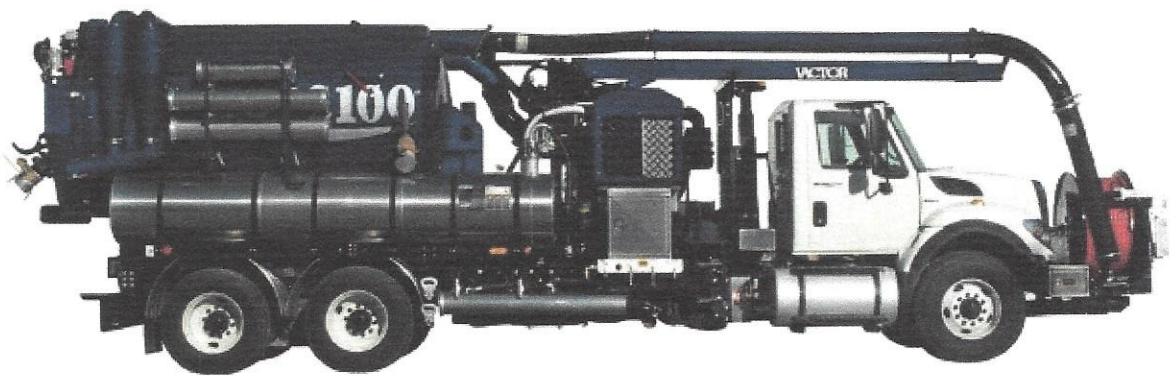

**For:
Village of Orland Park
15655 Ravinia Ave.
Orland Park, IL 60462**

Village of Orland Park

June 23, 2015

STANDARD FEATURES INCLUDED IN CONTRACT BASE PRICE:

Page 2

- 12 yard debris body
- 24" x 26" x 69" Curb Side Aluminum Toolbox
- Aluminum Fenders
- Mud Flaps
- Electric/Hydraulic Four Way Boom
- Color Coded Sealed Electrical System
- Remote Pendant Control w/35' Cord
- Vansco-Electronic Package
- Double Acting Dump Hoist Cylinder
- Handgun Assy. w/1/2" x 35' Hose w/Quick Disconnects
- 3" Y-Strainer at Water Pump Inlet
- Ex-Ten Steel Cylindrical Debris Tank
- Flexible Hose Guide
- 30 Deg. Sand Nozzle w/Carbide Inserts
- 30 Deg. Sanitary Nozzle w/Carbide Inserts
- 15 Deg. Penetrator Nozzle w/Carbide Inserts
- Nozzle Storage Rack
- Vacuum Tube Storage: Curbside (2) Pipe, Rear Door (2) Pipe
- 1" Nozzle Guide
- Flat Rear Door w/Hydraulic Locks and Door Power-up/Down, Open/Close Feature
- Dual 10" Stainless Steel Float Shut Off System/Rear Mounted
- Debris Body Vacuum Relief System
- Debris Deflector Plate
- 60" Dump Height
- Water Sight Gauge DS/PS
- Liquid Float Level Indicator
- 3" Y-Strainer @ Water Pump w/3" Drain Valve
- Performance Package: (Hydraulic Variable Flow, Dual PTO's. Dual Hydraulic Pumps)
- 1" Water Relief Valve for Vactor Water Pump
- Midship Handgun Coupling
- Side Mounted Water Pump
- 80 gpm @ 2,500 psi Water System with Variable Flow
- Hose Footage Counter - Mechanical
- Hose Reel Chain Cover (Full)
- Tachometer/Chassis Engine W/Hourmeter
- Tachometer & Hourmeter/Aug Engine
- Circuit Breakers
- LED Lights. Clearance, Back-Up, Stop, Tail & Turn
- Tow Hooks, Front and Rear
- Electronic Back-Up Alarm
- 8" Vacuum Pipe Package
- Vactor Manual
- Freightliner 114SD Tandem Axle Chassis

Suburban Purchasing Cooperative Contract #127 Base Price: \$292,898.00

Village of Orland Park

June 23, 2015

ADDITIONAL PRODUCT ENHANCEMENTS INCLUDED IN TOTAL PRICE:

Page 3

\$1,429	· Debris Body Flush Out System
\$1,140	· 6" Rear Door Mounted Knife Valve with Camloc fitting and cover, 3:00 position
\$4,997	· Centrifugal Separators (Cylclones) Rear Mounted
\$991	· Folding Pipe Rack, Curbside
\$991	· Folding Pipe Rack, Streetside
\$991	· Folding Pipe Rack, Rear Door
\$1,456	· Rear Door Splash Shield
\$2,160	· Lube Manifold (Upper Boom and Upper rear door)
\$615	· Low Water Light with Alarm and Water Pump Flow Indicator
\$1,693	· Continuous Fill System At Water Tank Inlet
\$1,236	· Air Purge System Utilizing Chassis Air System
\$416	· 3" Y strainer in lieu of 2" water tank fill
\$3,874	· 1,500 gallon fresh water capacity (6x4 chassis required)
\$17,407	· Two stage fan
\$13,328	· 10 Ft. Hydraulic Telescoping Boom with 180 Degree Rotation
\$754	· Joystick control for boom functions (1) - Front
\$512	· Post Type Front Bumper Boom Storage
\$2,943	· T300 OMNEX Remote Control Belly Pack (Wired or Wireless Controls)
\$551	· Rotatable Boom Inlet Hose (telescopic boom)
N/C	· 80 GPM / 2500 PSI Water System
\$2,899	· 12 GPM Cold Weather Recirculation System (automatic trans)
\$2,630	· Accumulator system for jet rodder hose
\$3,273	· Hydro Excavation Kit with Retractable Reel, 50' x 3/8" hose/gun
\$485	· Fan Flush Out System
\$1,156	· 1" x 600' Parker Paraflex Predator Sewer Hose, 3000 PSI - Blue
\$1,638	· Digital Hose Footage Counter
\$1,231	· Handgun Hose Reel – Spring Retractable with 50ft Hose Assembly
\$901	· Hydraulic Shutoff Valves at Suction, Return, and Filter Line
\$474	· Rodder Pump Drain Valves
\$355	· Hydraulic Oil High Temperature Light and Alarm
\$1,962	· Signal Master Directional Arrow Stick One Piece 8 LED Lights Rear
\$355	· Hand Light with Bumper Plug
\$2,459	· FSDOT 5 Light System – All LED System
\$744	· LED Work Lights Mounted on all Booms
\$625	· LED Worklight Mounted on Operator Station
\$625	· LED Worklight Mounted at Hose Reel
\$469	· LED Worklight Mounted on Curbside
\$1,638	· Camera System, Rear Camera Only
\$3,002	· 46849AB / 16W x 30H x 96D Behind Cab Aluminum Tool Box
\$1,401	· 46849MH / 60W x 20H x 12D Aluminum Tool Box Driverside
\$1,826	· Front Bumper Aluminum Toolboxes
\$310	· Safety Cone Storage x2 \$155 Each
\$500	· Module Paint Wet on Wet - Red
\$243	· Dual Air Suspension Seats In Cab
\$155	· Additional Vactor Printed Manual
\$1,500	· 2 Additional Vactor Factory Training Classes



Village of Orland Park
15655 Ravinia Ave.
Orland Park, IL 60462

June 23, 2015
Page 4

CHASSIS (Included in Contract Base Price):

- 2016 Freightliner 114SD Tandem Axle Chassis
- Cummins ISL 370 HP Diesel Chassis Engine
- Allison 3000 RDS Automatic Transmission
- 66,000 GVWR
- Chassis paint color of Red

PRICING:

***New VACTOR 2112 Plus combination sewer cleaner Contract Base Price: \$292,898.00**

***Additional features and product enhancements listed on previous pages \$ 90,340.00**

***New 2016 Freightliner 114SD tandem axle chassis – painted Red**

Total Price, Delivered to Orland Park, Illinois: \$383,238.00

- *Price does not include any Applicable Sales Tax or Federal Excise Tax
- *Municipal License, Title or Doc Fees Are Included
- *Complete on-site operator and maintenance training included
- *One, 3 day, Vactor factory training class included at no charge
- *Delivery is approximately 180 – 240 days after receipt of order
- *Payment is due in full at time of delivery, no down payment is required

If you have any questions, or require additional information, please do not hesitate to call upon us.
Standard Equipment Company looks forward to working with The Village of Orland Park on this opportunity.

Sincerely,

A handwritten signature in black ink, appearing to read "Mike O'Connor", written over a white background.

Mike O'Connor
Account Manager

STANDARD EQUIPMENT COMPANY

Cellular: (312) 208-5012

Village of Orland Park

June 23, 2015