

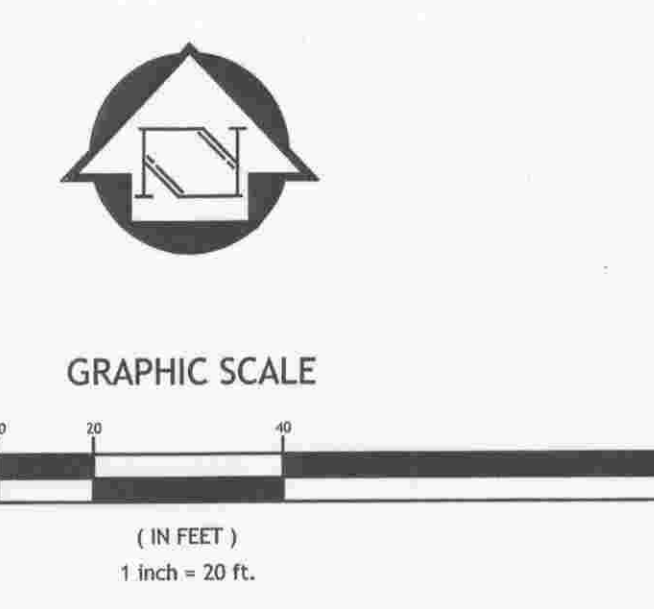


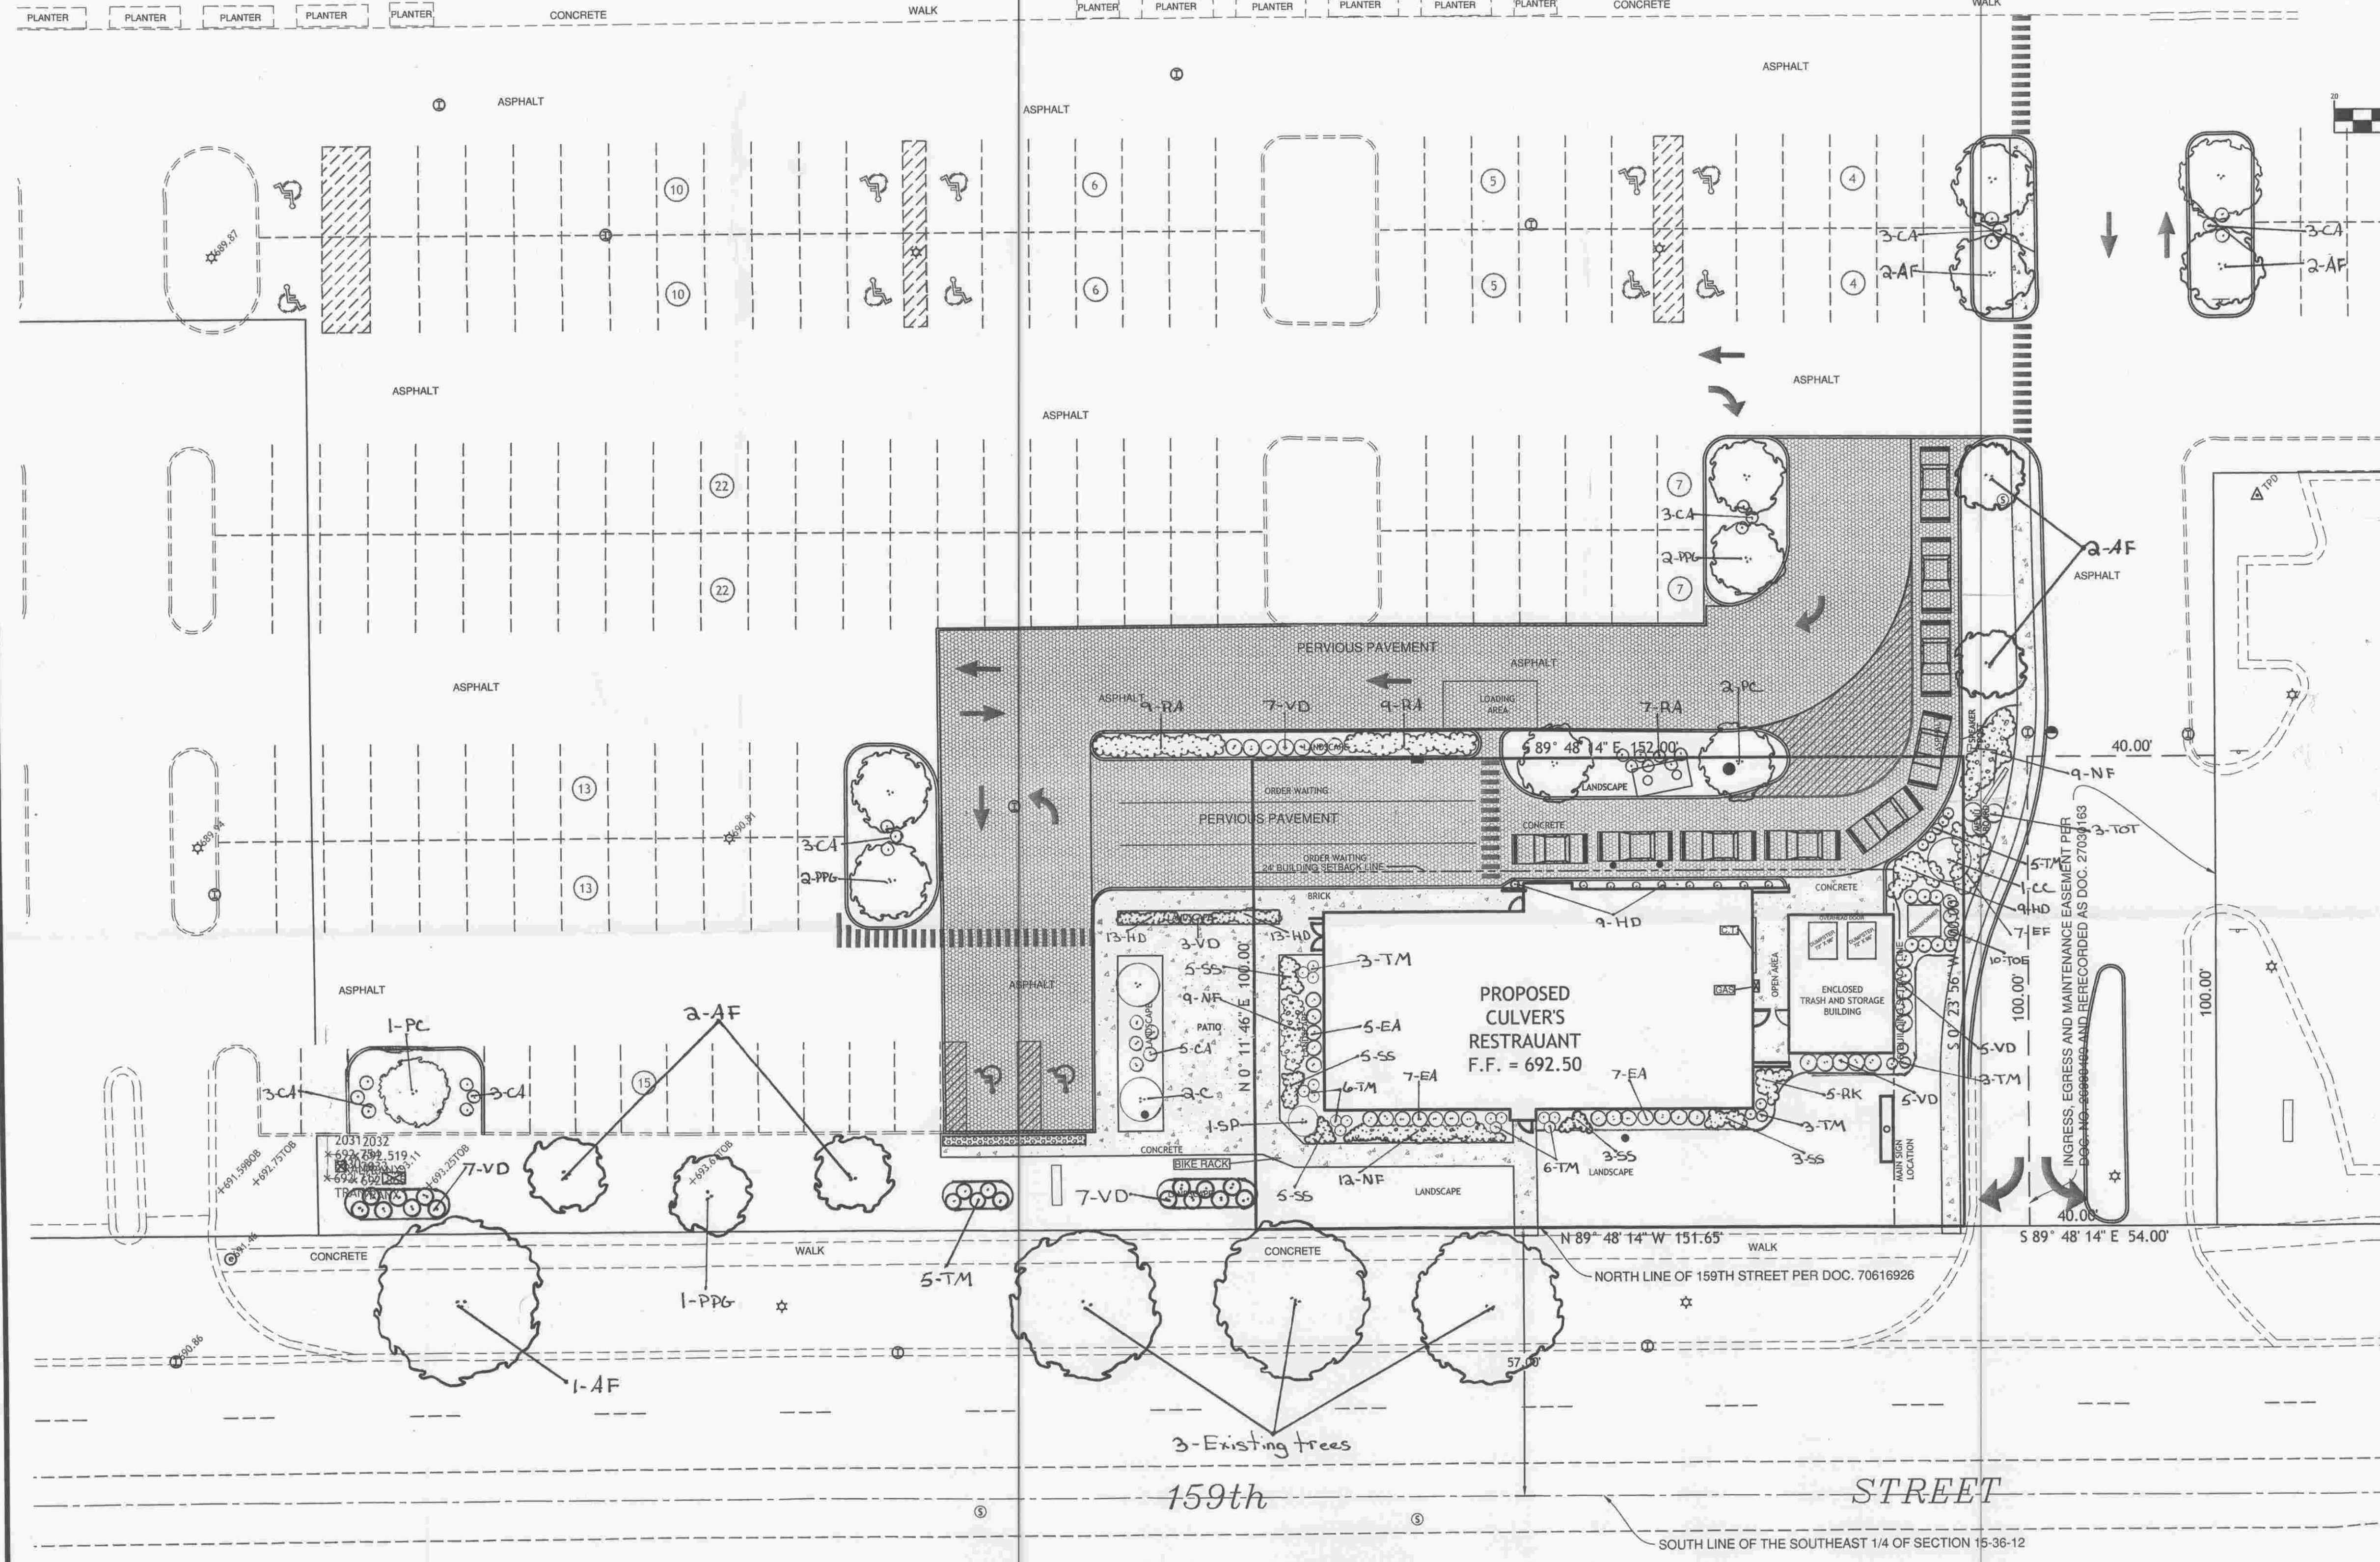

HARTMAN Landscape			
708.403.8433			
10614 West Joliet Road, Peotone, IL 60468 * 708-403-8433 * Fax 708-258-3557			
Key	Qty.	Size	Botanical Name
AF	9	2.5"	Acer X Freemanii
GT	6	2.5"	Gleditsia Triacanthos
PPG	5	6"	Picea Pungens Glauca
CC	1	8"	Crataegus Crusgalli
PC	3	2.5"	Pyrus Calleryana
C	2	6-7'	Canadensis
SP	1	4'	Syringa Persica
EA	19	36"	Euonymus Alatus
VD	34	36"	Viburnum Dentatum
RA	25	3g	Rhus Aromatica
EF	7	2g	Euonymus Fortunei
RK	5	2g	Rosa Knockout
TOT	3	4'	Thuja Occidentalis
TOE	10	4'	Thuja Occidentalis
TM	31	18"	Taxus Media
CA	41	3g	Calamagrostis Acutiflora
HD	35	1g	Hemerocallis Daylily
NF	30	1g	Nepeta Faassenii
SS	21	1g	Sedum Spectabile
			Common Name
			Autumn Blaze Maple
			Thornless Honey Locust
			Colorado Blue Spruce
			Thornless Cockspear Hawthorn
			Chanticleer Gallery Pear
			Redbud
			Persian Lilac
			Burning Bush
			Chicago Lustre Viburnum
			Growlow Sumac
			Emerald & Gold Euonymus
			Knockout Red Rose
			Techny Arborvitae
			Emerald Green Arborvitae
			Densiformis Yew
			Feather Reed Grass
			Stella D'Oro Daylily
			Catmint
			Sedum Autumn Joy

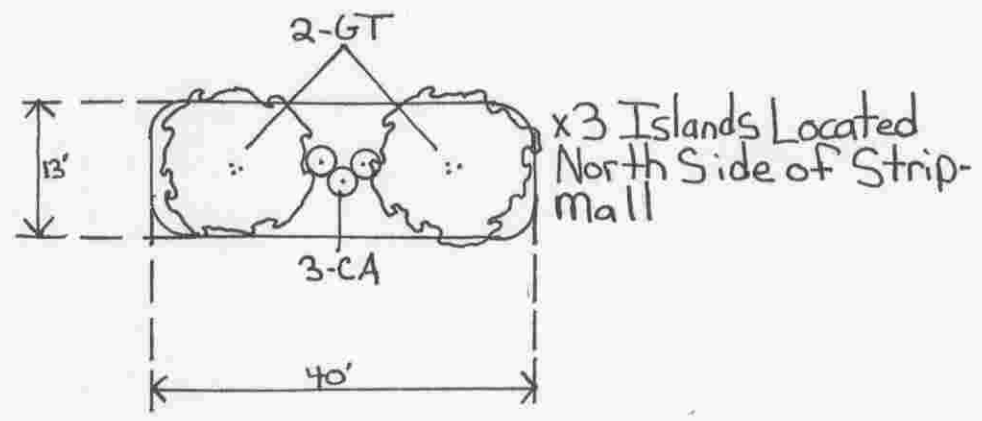


UTILITY LOCATION:
THE UNDERGROUND UTILITIES SHOWN HAVE BEEN LOCATED FROM VISIBLE FIELD INFORMATION AND EXISTING DRAWINGS. THE SURVEYOR MAKES NO GUARANTEE THAT THE UNDERGROUND UTILITIES SHOWN COMPRISE ALL SUCH UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED. THE SURVEYOR FURTHER DOES NOT WARRANT THAT THE UNDERGROUND UTILITIES SHOWN ARE IN THE EXACT LOCATION INDICATED ALTHOUGH HE DOES CERTIFY THAT THEY ARE LOCATED AS ACCURATELY AS POSSIBLE FROM INFORMATION AVAILABLE. THE SURVEYOR HAS NOT PHYSICALLY LOCATED THE UNDERGROUND UTILITIES. ORDINARY UTILITY SERVICE DROPS OR CONNECTIONS ARE NOT LOCATED OR SHOWN ON SURVEY.

- Landscape Notes and Details**
In accordance with Section 6-305 V.1.c.d., and V.2. a series of landscape notes should be added to the plan to ensure a quality landscape. In addition, planting construction details should be added to the plan. The notes should address the following:
- Plant quantities shown in the Plant Schedule are for convenience only. The Contractor is responsible for providing and installing all materials shown on the plan and should not rely on the Plant Schedule for determining quantities.
 - Size and grading standards of plant materials shall conform to the latest edition of ANSI Z60.1, AMERICAN STANDARD FOR NURSERY STOCK, by the American Association of Nurserymen.
 - All plant materials shall be nursery grown stock and shall be free of any deformities, diseases or insect damage. Any materials with damaged or crooked/ disfigured leaders, bark abrasion, sunscald, insect damage, etc. are not acceptable and will be rejected. Trees with multiple leaders will be rejected unless called out in the Plant Schedule as multi-stem.

- All planting operations shall be completed in accordance with standard horticultural practices. This may include, but not be limited to, proper planting bed and tree pit preparation, planting mix, pruning, staking & guying, wrapping, spraying, fertilization, planting and adequate maintenance of materials during construction activities.
- The Contractor shall guarantee plant materials for a period of one year from Date of Acceptance by Owner. The Contractor shall outline proper maintenance procedures to the Owner at the time of acceptance. During the guarantee period, dead or diseased materials shall be replaced at no cost to the Owner. At the end of the guarantee period the Contractor shall obtain Final Acceptance from the Owner.
- All grass, clumps, other vegetation, debris, stones, etc. shall be raked or otherwise removed from planting and lawn areas prior to the initiation of installation procedures.
- All planting beds shall be mulched with a minimum 3" layer of screened, shredded bark mulch.
- The Contractor shall verify the locations of all underground utilities prior to initiating planting operations. The contractor shall repair/ replace any utility, paving, curbing, etc. which is damaged during planting operations.

- All plant materials shall be nursery grown stock and shall be free of any deformities, diseases or insect damage. Any materials with damaged or crooked/ disfigured leaders, bark abrasion, sunscald, insect damage, etc. are not acceptable and will be rejected.
 - All plant materials shall be inspected and approved by the landscape architect prior to installation. Any materials installed without approval may be rejected.
 - Trees not exhibiting a central (or single) leader will be rejected unless called out in the Plant Schedule as multi-stem.
- Detention/Retention**
Per Plan Commission minutes, stormwater detention will be accommodated offsite in the Village owned detention pond at the rear of the shopping center.
- Wetlands**
To our knowledge there are no wetlands on the site and that the Village has documentation supporting this.

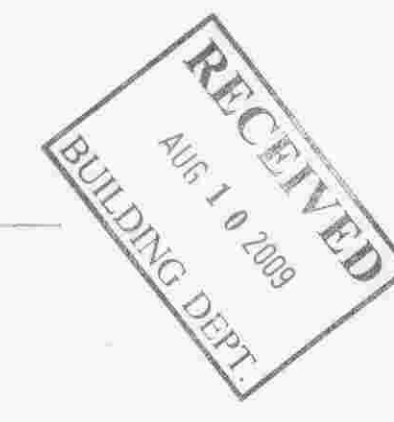

Joseph A. Schutt & Associates
19350 S. HARLEM AVENUE FRANKFORD, IL 60423
PHONE: 708-720-1000 FAX: 708-720-1065
e-mail: jas@jaseng.com http://www.jaseng.com

CIVIL ENGINEERING LAND SURVEYING ENVIRONMENTAL LAND PLANNING GPS SERVICES

CULVER'S
ORLAND PARK, IL
LANDSCAPING PLAN

Date: 04-10-2009
Scale: 1"=20'
Disk No.: 08-065-014
Drawn: T.P.
Checked: A.J.
Sheet: 1 OF 1
Project No.: 08-065