

All existing trees to be encircled with construction fencing at the drip line.
Fencing to be staked with metal fence posts every six feet.
Barriers to remain until final grading and landscaping.


Mac's Lawnstyle, Inc.
131 Harvest Crossing
Orland Park, Illinois 60467
(708) 334-0273

BOARD APPROVED

Case No: 2009-0447
Date: 11/19/2012
W/Conditions: _____
W/Out Conditions: _____
Drawing Date: 11-17-2012

VILLAGE OF ORLAND PARK

Orland Park Medical Center
54 Orland Square Drive
Orland Park, Illinois

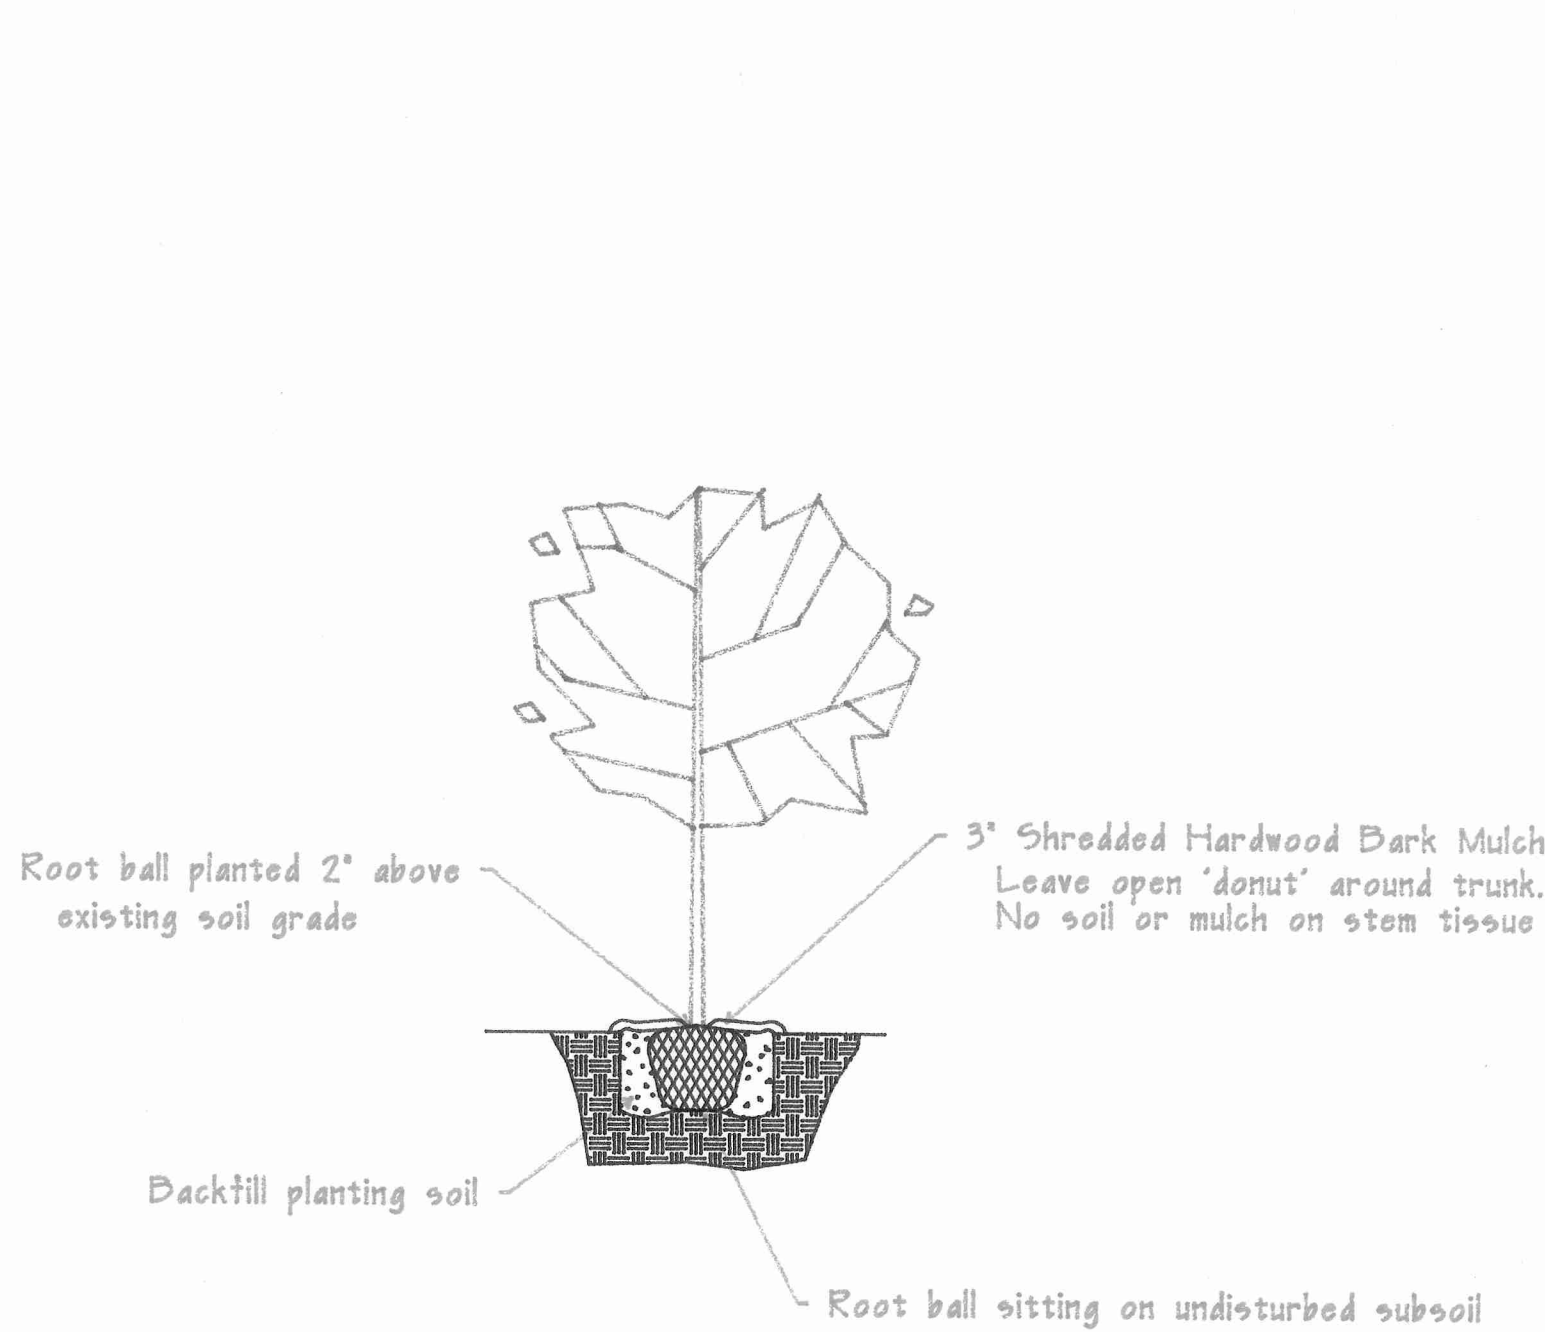


Size of planting pit varies with root ball size.
Spread fertilizer evenly in planting saucer.
Retain all leaders on trees if single stemmed
prune away all dead, broken, or crossing branches.

TYPICAL TREE PLANTING DETAIL
NOT TO SCALE

Landscape Architect


Lang F. Deiswanger
Illinois License #
157-000289

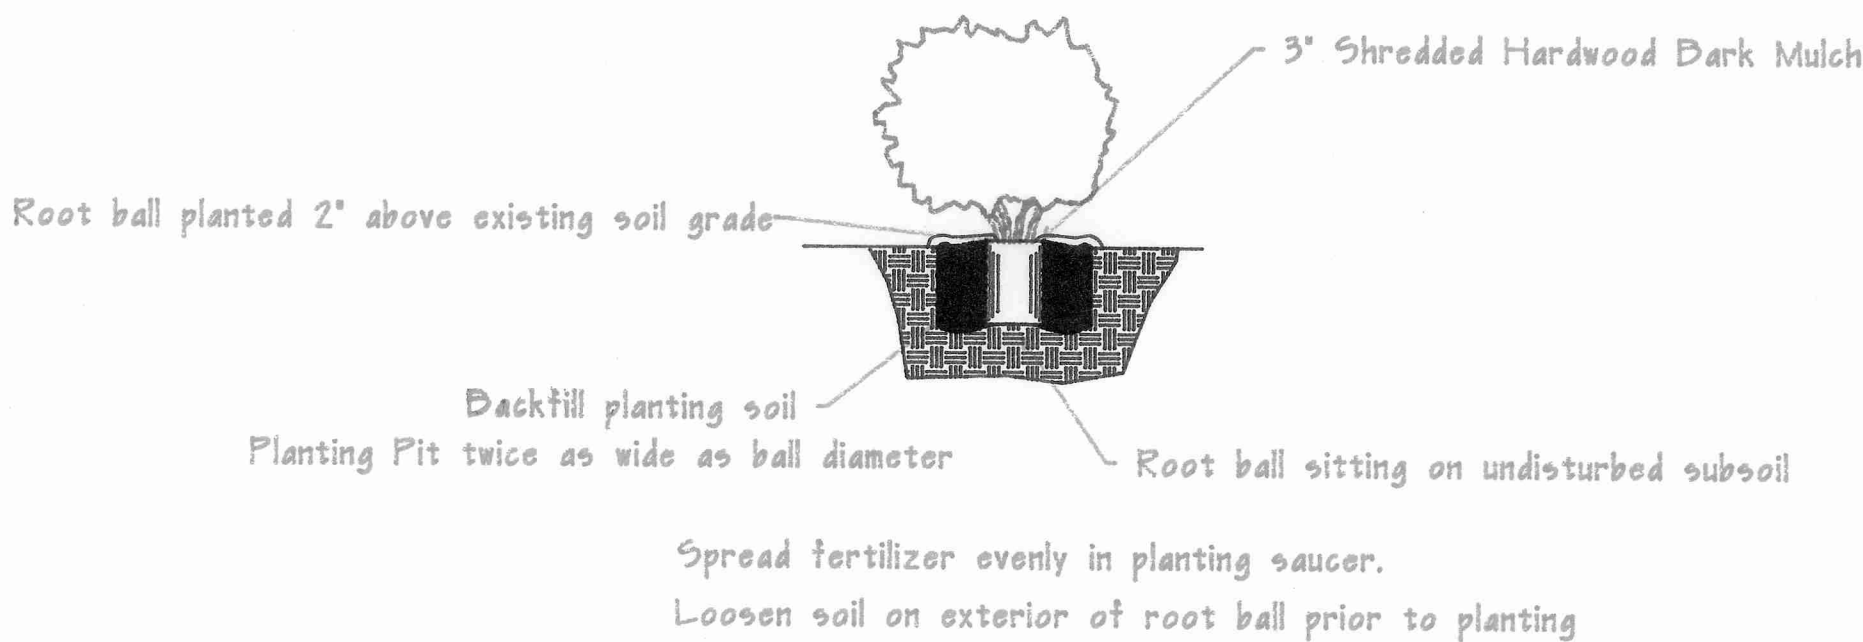

TYPICAL CONTAINER PLANTING DETAIL
NOT TO SCALE

Landscape Notes:

- All plant material shall conform to the American Association of Nurserymen, ANSI Z260.1 current edition.
- All material shall be planted with pulverized soil/compost. Planting depth to be the same level as the plant was originally grown.
- Calipered trees to be guyed with cables and turnbuckles for a period of one year.
- Double processed bark mulch to be used on all trees and shrubs. Trees mulched to cover the root ball and shrubs in planting beds mulched to a depth of 3 inches. No mulch to contact the trunk or stems of trees and shrubs.
- 4.1 oz, woven polypropylene, needle-punched fabric weed barrier under mulch.
- Landscape and/or Owner required to call J.U.L.I.E. and are liable for any damage to utilities.
- The sizes of plant material shown in the plant chart are the minimum required at the time of planting. Contractor to provide information at the time of bidding if alternative materials are suggested.
- All plant material shall be inspected and approved by the landscape architect prior to installation. Any materials installed without approval may be rejected.
- All plant materials shall be nursery grown stock and shall be free of any deformities, diseases or insect damage. Any materials with damaged or crooked leaders, bark abrasions, sunscald, insect damage, etc. are not acceptable and will be rejected.
- Trees not exhibiting a central leader will be rejected unless stated as multi-stem in the plant schedule.
- Plant material shall be maintained in natural forms in a healthy and viable manner by the property Owner, and shall be replaced by the Owner as necessary to comply with the approved design. Plant material to be guaranteed by the landscaper for a period of one year from final inspection/approval.
- Plant quantities shown in the Plant Schedule are for convenience only. The Contractor is responsible for providing and installing all materials shown on the plan and should not rely on the Plant Schedule for determining quantities.
- All parking islands to be crowned 6" and filled with 8" minimum depth of topsoil/compost mix and 3" depth of hardwood mulch.
- All disturbed areas not receiving plantings (including right-of-way) shall receive eight eight inches of topsoil, and premium bluegrass blend sod.

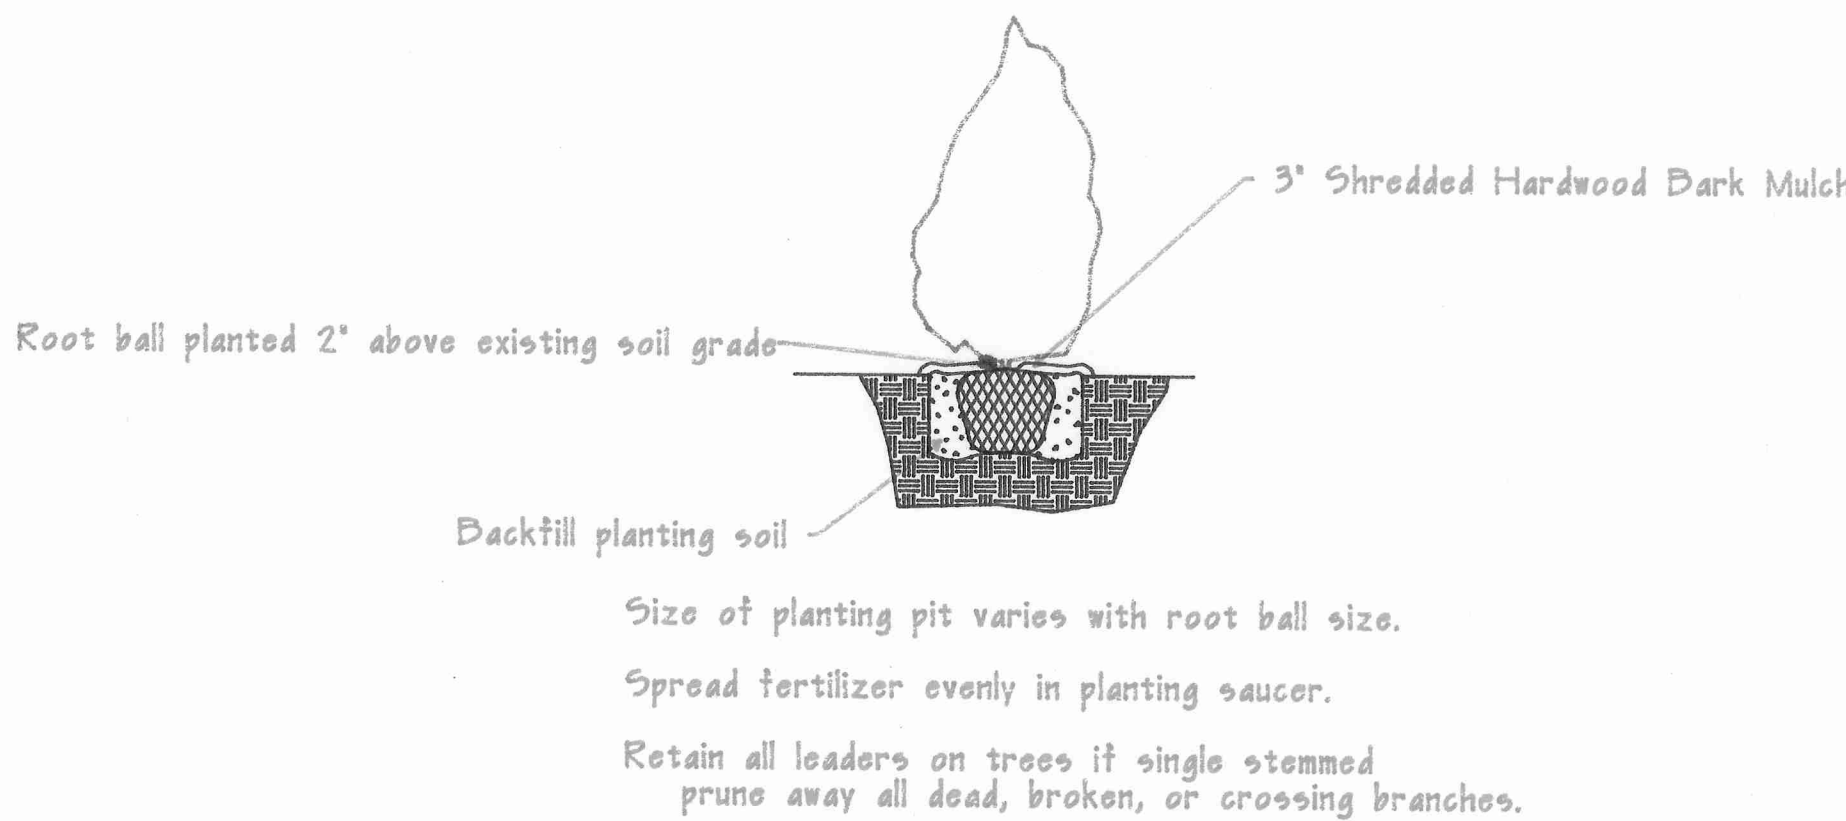

TYPICAL BALLED SHRUB PLANTING DETAIL
NOT TO SCALE

Preservation Plan for Existing Trees			
Quant.	Botanical Name	Common Name	Condition
10	Acer rubrum 'Red Sunset'	Red Sunset Maple	Good & Healthy
2	Acer saccharinum	Silver Maple	Good & Healthy
4	Fraxinus pennsylvanica	Green Ash	Good & Healthy
5	Prunus species	Cherry Species	Good & Healthy

All existing trees on the site have been saved. All will be pruned to ensure future health.
All existing trees to be encircled with construction fencing at the drip line.
Fencing to be staked with metal fence posts every six feet.
Barriers to remain until final grading and landscaping.

MAC'S LAWNSTYLE, INC.

Landscape Maintenance Contractors



November 16, 2012

131 Harvest Crossing

Orland Park, IL 60467

(708)460-6604

macslawnstyle@comcast.net

Village of Orland Park

Re: Tree Preservation at 54 Orland Square Drive

The trees that we are preserving on the north, south, east and west islands are beyond the parking lot curb lines and the builder for the Orland Park Medical Center has erected a cyclone fence around the perimeter of the parking lot to protect the tree preservation. There will be no machinery in those islands. There is also a silt fence around the perimeter of the property, not only to collect any garbage but to also insure the tree preservation.

Sincerely,

Laura Macarol
President