


LAGRANGE ROAD (U.S. ROUTE 45)

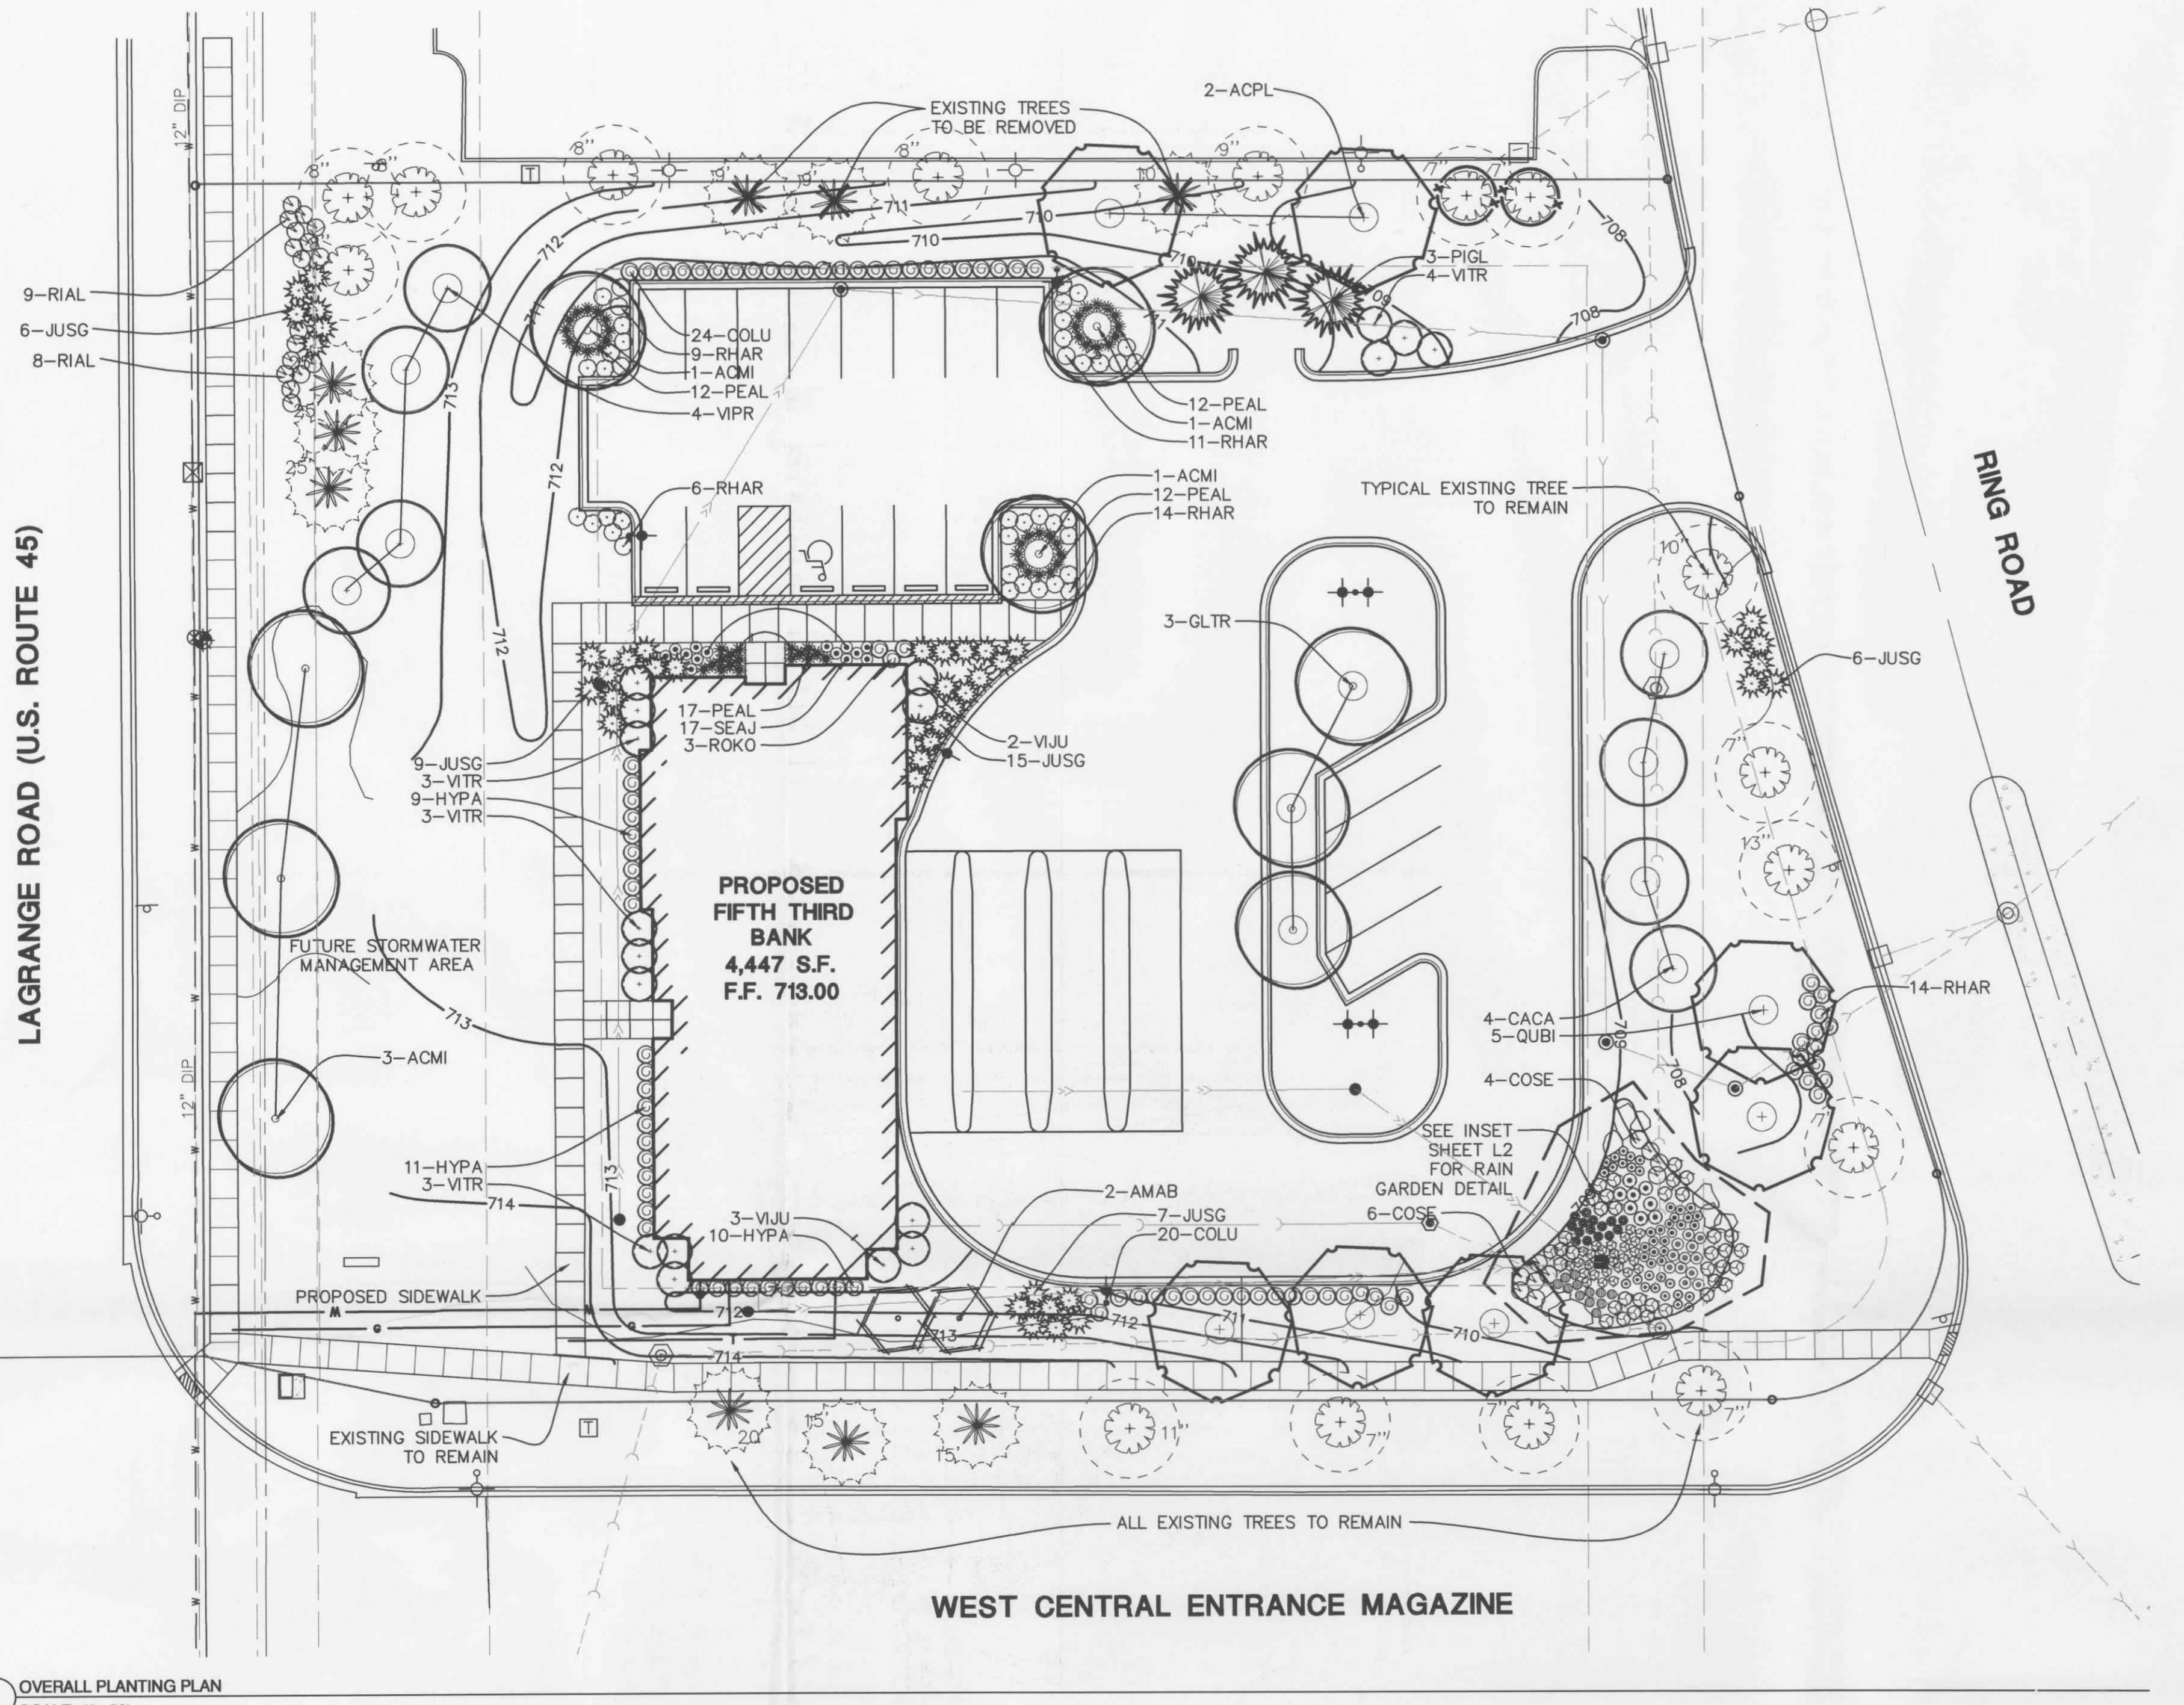

OVERALL PLANTING PLAN
SCALE: 1"=20'

UTILITY NOTES:

1. THE LANDSCAPE CONTRACTOR IS REQUIRED TO CONTACT J.U.L.I.E., THE COUNTY PUBLIC WORKS DEPARTMENT, AND ANY OTHER PUBLIC OR PRIVATE AGENCY NECESSARY FOR UTILITY LOCATION PRIOR TO ANY CONSTRUCTION.

2. THIS DRAWING IS A PART OF A COMPLETE SET OF BID DOCUMENTS, SPECIFICATIONS, ADDITIONAL DRAWINGS, AND EXHIBITS. UNDER NO CIRCUMSTANCES SHOULD THESE PLANS BE USED FOR CONSTRUCTION PURPOSES WITHOUT EXAMINING ACTUAL LOCATIONS OF UTILITIES ON SITE, AND REVIEWING ALL RELATED DOCUMENTS.

3. THE LOCATION OF THE ALL UNDERGROUND UTILITIES ARE LOCATED ON THE ENGINEERING DRAWINGS FOR THIS PROJECT. THE MOST CURRENT REVISION IS USED IN MAKING THIS DOCUMENT. UNDERGROUND UTILITIES EXIST THROUGHOUT THIS SITE AND MUST BE LOCATED PRIOR TO ANY CONSTRUCTION ACTIVITY. WHERE UNDERGROUND UTILITIES EXIST, FIELD ADJUSTMENT MAY BE NECESSARY AND MUST BE APPROVED BY A REPRESENTATIVE OF THE OWNER. NEITHER THE OWNER NOR THE LANDSCAPE ARCHITECT ASSUMES ANY RESPONSIBILITY WHATSOEVER, IN RESPECT TO THE CONTRACTORS ACCURACY IN LOCATING THE INDICATED PLANT MATERIAL, AND UNDER NO CIRCUMSTANCES SHOULD THESE PLANS BE USED WITHOUT REFERENCING THE ABOVE MENTIONED DOCUMENTS.

PLANT SCHEDULE

KEY	QTY.	BOTANICAL NAME	COMMON NAME	SIZE	NOTES
SHADE TREES					
ACMI	6	<i>Acer miyabei 'Morton'</i>	State Street Miyabe Maple	2.5' cal.	
ACPL	2	<i>Acer platanoides 'Superform'</i>	Superform Norway Maple	4" cal.	
GLTR	3	<i>Gleditsia triacanthos var. inermis 'Shademaster'</i>	Shademaster Thornless Honeylocust	2.5' cal.	
QUBI	5	<i>Quercus bicolor</i>	Homestead Elm	2.5' cal.	
UNDERSTORY TREES					
AMAB	2	<i>Amelanchier x grandiflora 'Autumn Brilliance'</i>	Autumn Brilliance Serviceberry	5' ht.	Clump form
CACA	4	<i>Carpinus caroliniana</i>	Blue Beech/American Hornbeam	5' ht.	Clump form
VIPR	4	<i>Viburnum prunifolium</i>	Blackhawk Viburnum	5' ht.	Clump form
EVERGREEN TREES					
PIGL	3	<i>Picea glauca var. densata</i>	Black Hills Spruce	6' ht.	
DECIDUOUS SHRUBS					
GOLU	44	<i>Cotoneaster lucidus</i>	Peking Cotoneaster	30' ht.	
COSE	10	<i>Corus sericea 'Isanti'</i>	Isanti Redtwig Dogwood	30' ht.	REVISED PER VILLAGE COMMENTS
HYPD	30	<i>Hydrangea paniculata 'Tardive'</i>	Tardive Hydrangea	24' ht.	REVISED PER VILLAGE COMMENTS
BIHAR	54	<i>Rhus aromatica 'Gro-Low'</i>	Gro-Low Fragrant Sumac	24' width	REVISED PER VILLAGE COMMENTS
BIAL	17	<i>Ribes alpinum 'Green Mound'</i>	Green Mound Alpine Current	24' ht.	REVISED PER VILLAGE COMMENTS
RIKO	3	<i>Rosa 'Rosa rugosa'</i>	Knock-Out Shrub Rose	24' ht.	REVISED PER VILLAGE COMMENTS
VJUJ	5	<i>Viburnum judicum</i>	Judib Viburnum	30' ht.	REVISED PER VILLAGE COMMENTS
VITR	13	<i>Viburnum trilobum 'Alfredi'</i>	American Cranberry Bush	30' ht.	REVISED PER VILLAGE COMMENTS
EVERGREEN SHRUBS					
JUSG	43	<i>Juniperus chinensis 'Sea Green'</i>	Sea Green Juniper	24' width	
ORNAMENTAL GRASSES/PERENNIALS					
PEAL	53	<i>Pennisetum alopecuroides 'Hameln'</i>	Dwarf Fountain Grass	1 gal.	
SEAJ	17	<i>Sedum spectabile 'Autumn Joy'</i>	Autumn Joy Sedum	1 gal.	
RAIN GARDEN					
SEE SHEET L2 FOR RAIN GARDEN PLANT LIST AND QUANTITIES					


NOTES:

1. All areas disturbed by construction shall be graded to finish grade with topsoil and sodded.
2. Plant sizes are minimums. The contractor shall meet all size requirements listed. Container sizes shall conform to the requirements set by the American Standards for Nursery Stock.
3. All plant material shall conform to the latest edition of American Standard for Nursery Stock published by The American Association of Nurserymen.
4. The quantities in the Plant Schedule are provided to the Landscape Contractor as a convenience. It is the Landscape Contractors responsibility to verify all quantities and availability of plants and materials shown on the plan and schedule prior to submitting a bid. If selected, the Landscape Contractor shall make provisions necessary to have the necessary material to complete the landscape installation by the established deadlines.
5. All disturbed areas including shrub beds and individual trees shall be mulched with a minimum of 3" finely shredded bark mulch to be approved by the Landscape Architect/Owners Representative. Perennial, ground cover and annual flower beds shall be mulched with 2" of finely ground compost.
6. Preliminary Acceptance - All plantings shall be maintained by the Contractor for a period of 60 days after preliminary acceptance by the Owner. Maintenance shall include, but is not limited to, mowing and edging turf, pulling weeds, watering turf and plant material, and annual flower maintenance.
7. Final Acceptance - Final acceptance will be granted by the Landscape Architect/Owners Representative upon receipt of written request by the contractor, combined with an acceptable final review of the installation by the Landscape Architect/Owners Representative. All plant material (excluding annual flowers), shall be guaranteed for two year after the end of the 60 day maintenance period. The end of the maintenance period is marked by the final acceptance of the Contractor's work by the Owner, and the Landscape Architect/Owners Representative. All plants that are not vigorous, healthy and in good condition shall be replaced by the Landscape Contractor at no additional expense to the Owner. These replacement plants shall meet all specified qualities of the original plant materials and carry the same guarantee from the time of replacement.
8. Site Cleanup - The Contractor shall protect the property of the Owner and the work of other Contractors. The Contractor shall also be directly responsible for all damage caused by his activities at no additional expense to the owner and for the daily removal of all trash and debris from his work area to the satisfaction of the Landscape Architect/Owners Representative.

VILLAGE OF ORLAND PARK GENERAL PLANTING NOTES:

- a. Material quality and measurement should conform to the most recent edition of the American Standards for Nursery Stock, ANSI Z60 by the American Nursery and Landscape Association.
- b. All shade/overstory trees shall have a 'central leader.'
- c. The Landscape Architect/designer shall inspect and approve all plant material prior to installation. Any material installed without approval may be rejected.
- d. The Village may reject any materials that are diseased, deformed, or otherwise not exhibiting superior quality.
- e. The Contractor shall be responsible for providing and installing all materials shown on the plan in accordance with the plan design and materials quantities.
- f. The Contractor is responsible for protecting underground utilities, sidewalks, and other previously constructed site improvements.
- g. The Contractor is responsible for protecting all existing vegetation to be preserved.

BOARD APPROVED
CASE NO. 2008-0351
DATE 6-2-08
W/CONDITIONS
W/O CONDITIONS ✓

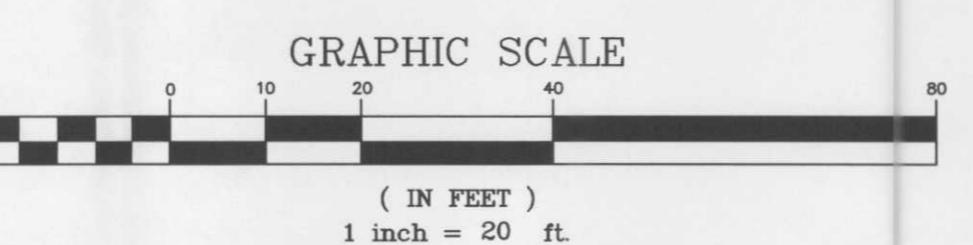

Call 48 hours before you dig
(Excluding Sat., Sun. & Holidays)
1-800-892-0123

DRAWN BY / CHECKED BY	
RECEIVED	MAY 27 2008
MAD	MAD
IAH	IAH
IAH	IAH



FIFTH THIRD BANK
ORLAND PARK, ILLINOIS
LANDSCAPE PLAN
ISSUED FOR PRELIMINARY REVIEW

PROJ. MGR.: SMW
PROJ. ASSOC.: ZAL
DRAWN BY: JAH
CHECKED BY: ---
DATE: 09.11.07
SCALE: 1"=20'
SHEET 1 OF 3
FTBOP 070674
© 2007. ALL RIGHTS RESERVED