

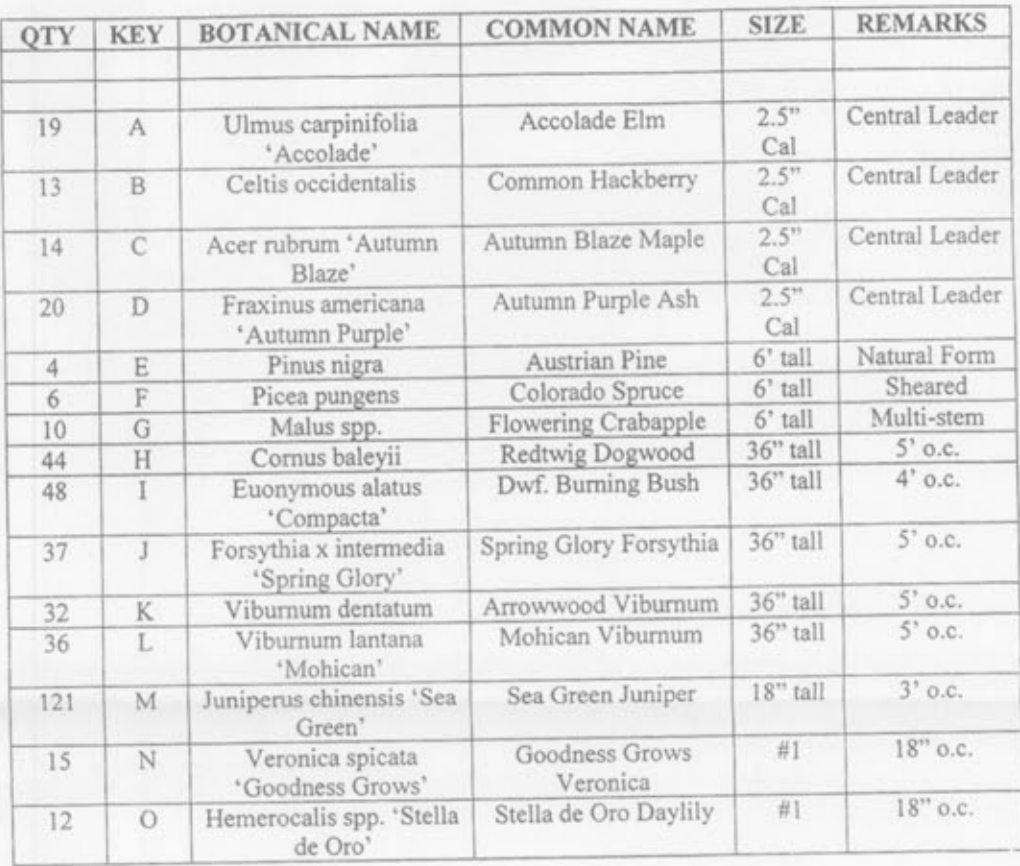
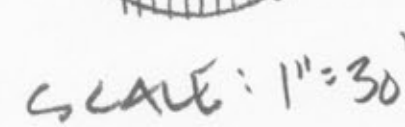





- 2) Plant quantities shown in the Plant Schedule are for convenience only. The Contractor is responsible for providing and installing all materials shown on the plan and should not rely on the Plant Schedule for determining quantities.
- 3) Size and grading standards of plant materials shall conform to the latest edition of ANSI Z60.1, AMERICAN STANDARD FOR NURSURY STOCK, by the American Nursery & Landscape Association.
- 4) All plant materials shall be nursery grown stock and shall be free of any deformities, diseases or insect damage. Any materials with damaged or crooked/disfigured leaders, bark abrasion, sunscald, insect damage, etc. are not acceptable and will be rejected. Trees with multiple leaders will be rejected unless specified in the Plant Schedule as multi-stem.
- 5) All plant materials shall be inspected and approved by the Landscape Architect prior to installation. Any materials installed without approval may be rejected.
- 6) Any existing trees to be retained shall be protected from soil compaction and other damages that may occur during construction activities by erecting fencing around such materials at a distance of at least 8.5' from the trunk.
- 7) Guying and staking shall only be incorporated with the planting of trees if specified by contractor.
- 8) All plant material shall be guaranteed for one full year excluding perennials.
- 9) Mulch shall be spread at a 3" depth using shredded hardwood bark mulch.
- 10) Any utility damage done at installation will be handled by the owner or contractor.
- 11) All lawn areas to be seeded.
- 12) No existing trees are to remain on property.
- 13) No wetlands exist on property.

BOARD APPROVED
CASE NO. 2007-0711
DATE 11-5-07
W/CONDITIONS _____
W/O CONDITIONS _____

