



"The Professional Approach to Construction"

To: Village of Orland Park Address: 14700 Ravinia Avenue Orland Park, IL 60462	Contact: Mr. Khurshid Hoda Phone: 708-403-6128 Email: khoda@orlandpark.org
Project Name: John Humphrey Complex Improvements Project Address: 14825 West Avenue Orland Park, IL 60462	Ref Number: CG19013 Date: 5/15/2019


V3 Construction Group proposes to perform the following work as a change order to the existing contract:


PEAT MITIGATION					
Item	Item Description	Quantity	Unit	Unit Price	Total Price
1.0	Excess Material Export Off-Site	7,000	CY	\$30.00	\$210,000.00
2.0	6" Perforated Storm Sewer	3,600	LF	\$18.00	\$64,800.00
3.0	Plaza Asphalt - Mill & Resurface 2" Asphalt	3,510	SY	\$17.80	\$62,478.00
4.0	Irrigation Upgrades	1	LS	\$33,000.00	\$33,000.00
5.0	Additional 6" Perforated Storm Sewer; Field 3	582	LF	\$18.00	\$10,476.00
TOTAL PRICE:					\$380,754.00

ALTERNATES					
Item	Item Description	Quantity	Unit	Unit Price	Total Price
1.0	Humphrey Bike Trail - Mill & Resurface 2" Asphalt	3,260	SY	\$29.50	\$96,170.00
2.0	Humphrey Bike Trail - Mill & Resurface 4" Asphalt	3,260	SY	\$51.20	\$166,912.00

Project Notes:

- 1.0 Repaving of the Humphrey Bike Trail should consider truck traffic on the trail and if a stronger section should be provided. Pricing includes compaction of aggregate base and additional restoration adjacent to the path construction.
- 2.0 Irrigation upgrades include new RPZ, pump and controls; and isolation vales, high-speed heads, additional zones and quick coupler water source.



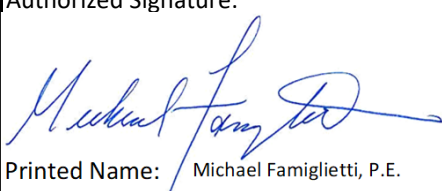
<p>ACCEPTED: The above prices, specifications and conditions are satisfactory and hereby accepted.</p> <p>Purchaser: Village of Orland Park _____</p> <p>Signature: _____</p> <p>Printed Name: _____</p> <p>Date: _____</p>	<p>CONFIRMED: V3 Construction Group, Ltd.</p> <p>Authorized Signature: </p> <p>Printed Name: Michael Famiglietti, P.E. Director of Construction</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

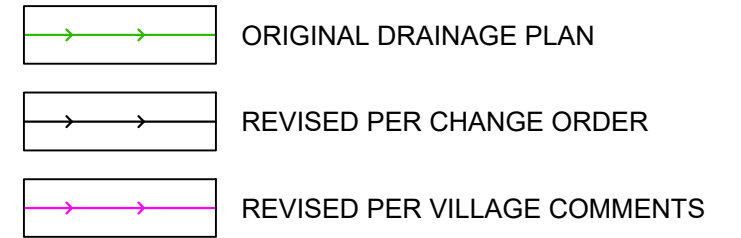

Original Bid	
12" Multi-Flow Drainage Installation	380 LF
6" Multi-Flow Drainage Installation	4,696 LF
Storm Sewer, 24" HDPE Mainline	673 LF
36" Dia. Catch Basin	3 EA
24" Dia. FES W/ Grate & Riprap	1 EA

Revised per Change Order	
12" Multi-Flow Drainage Installation	393 LF
6" Multi-Flow Drainage Installation	2,958 LF
Storm Sewer, 8" HDPE	865 LF
Storm Sewer, 12" HDPE	705 LF
Storm Sewer, 6" HDPE Perf.	4,146 LF
Cleanout	14 EA
4' Manhole	1 EA
24" Nyloplast Drain with 12" Dome Grate	9 EA

Revised per Village Comments	
Storm Sewer, 6" HDPE Perf.	582 LF

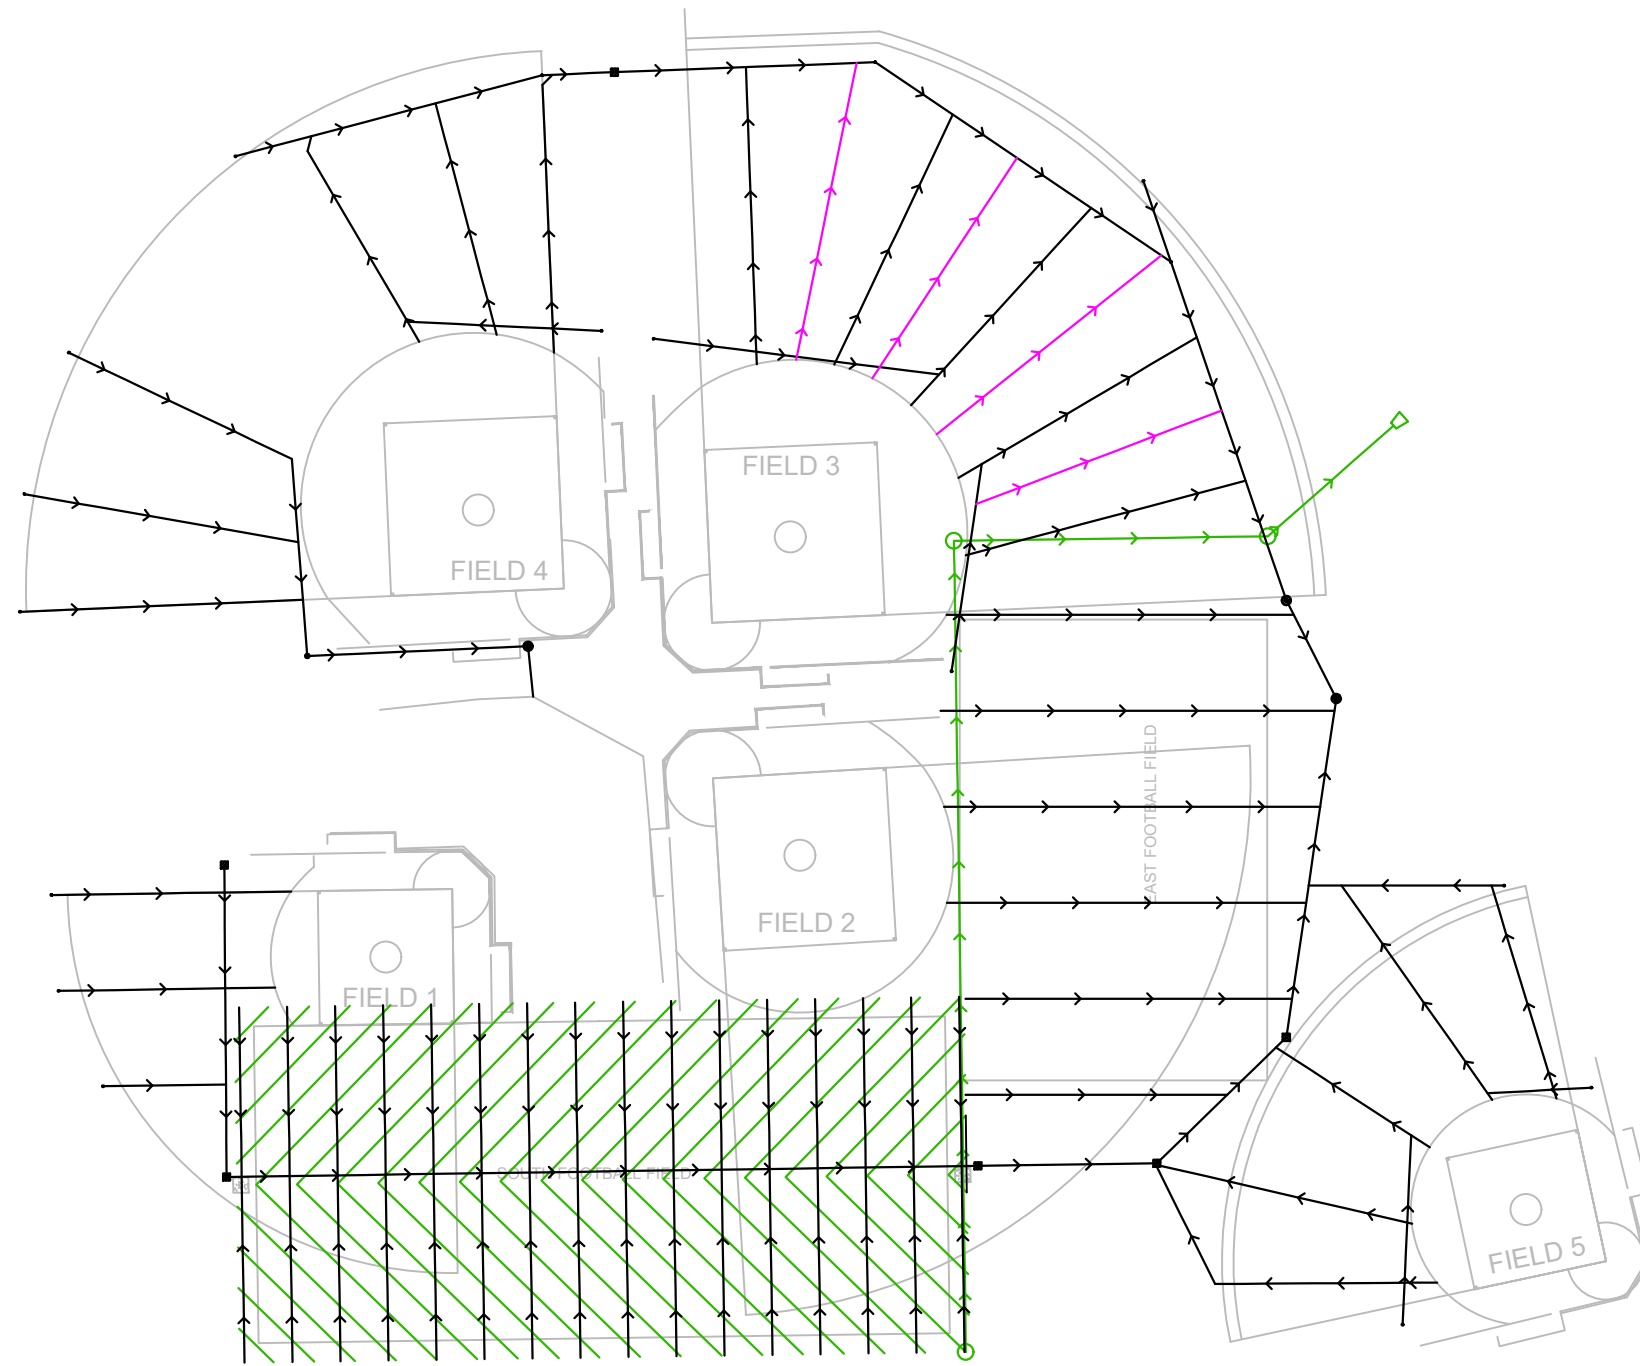

V3 Construction Group, Ltd.
 7325 Janes Avenue
 Woodridge, IL 60517
 630.724.9200 phone
 630.724.9202 fax
 www.v3co.com

John Humphrey Sports Complex

Notes:


05/15/2019

T.K.

1" = 100'



50 - Existing Path System
 51 - Plaza Pavement

 V3 Construction Group, Ltd.
 7325 Janes Avenue
 Woodridge, IL 60517
 630.724.9200 phone
 630.724.9202 fax
 www.v3co.com

JOHN HUMPHREY PAVING IMPROVEMENTS EXHIBIT

Notes:

PATH RESTORATION - 3,260 SY
 PLAZA PAVEMENT R&R - 3,510 SY

TAF

05-15-2019