


JOHN HUMPHREY DRIVE

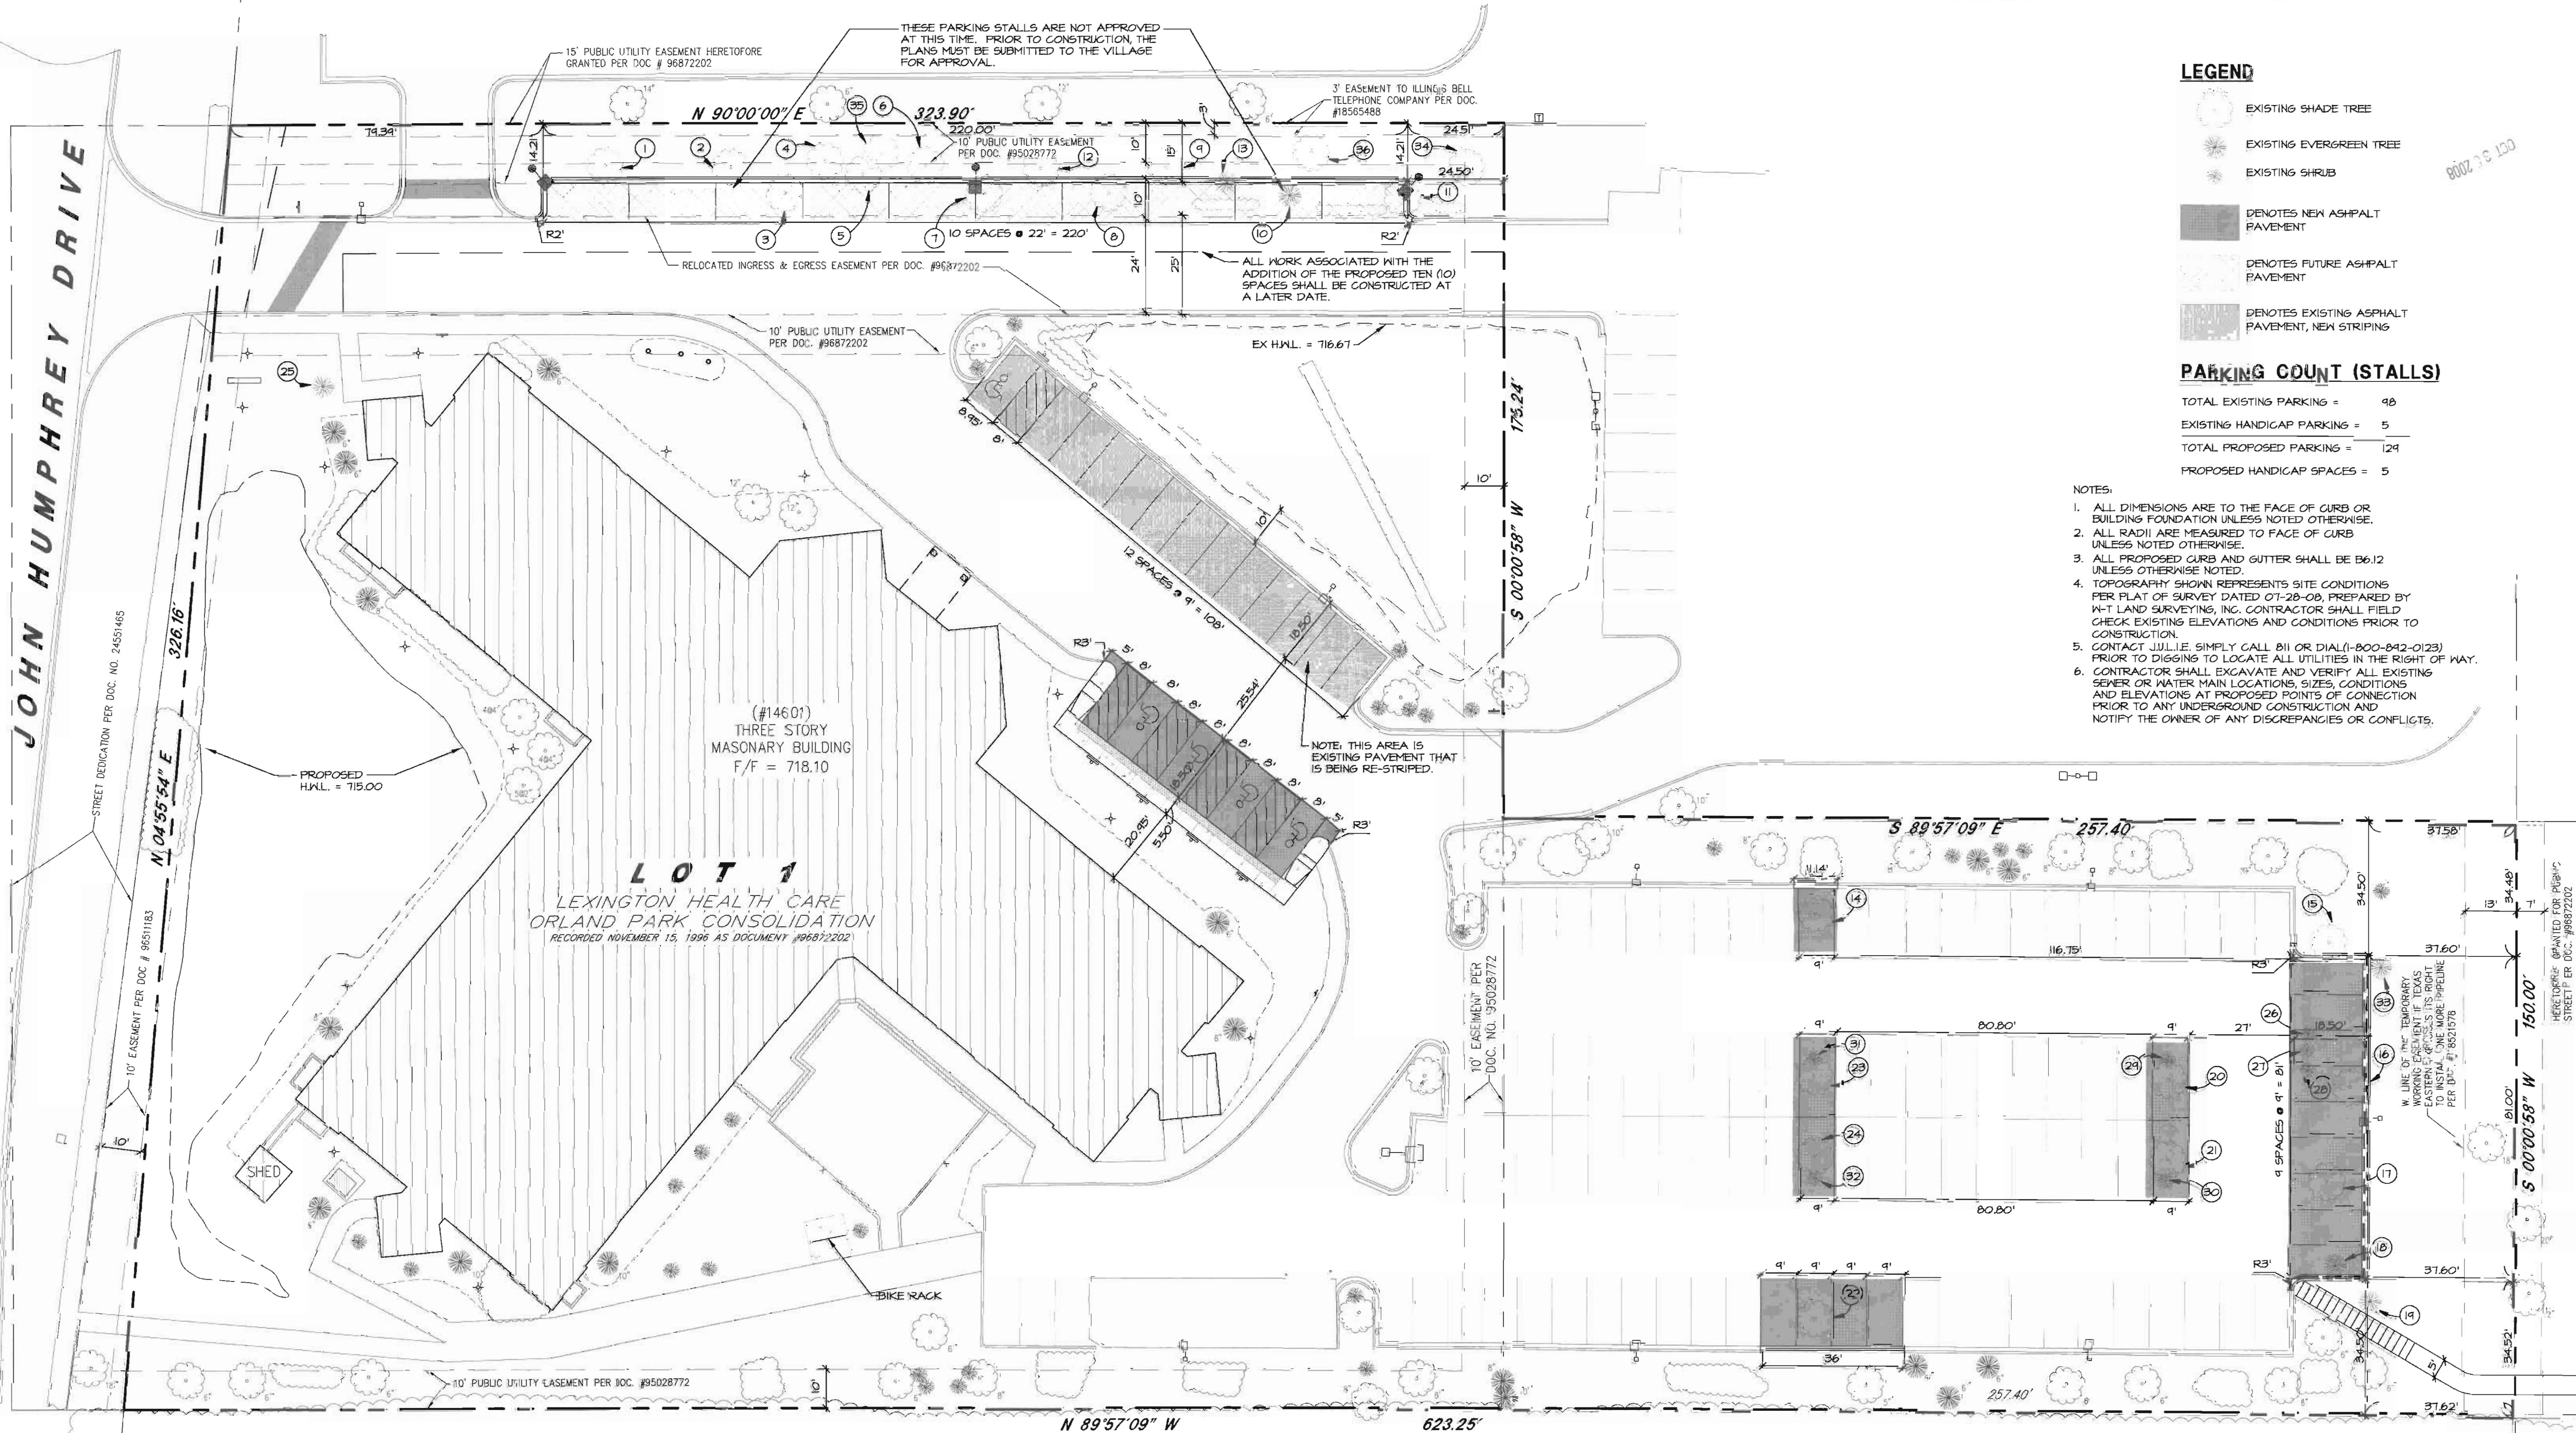

LEGEND

- EXISTING SHADE TREE
- EXISTING EVERGREEN TREE
- EXISTING SHRUB
- DENOTES NEW ASPHALT PAVEMENT
- DENOTES FUTURE ASPHALT PAVEMENT
- DENOTES EXISTING ASPHALT PAVEMENT, NEW STRIPING

PARKING COUNT (STALLS)

TOTAL EXISTING PARKING = 48
EXISTING HANDICAP PARKING = 5
TOTAL PROPOSED PARKING = 124
PROPOSED HANDICAP SPACES = 5

NOTES:

- ALL DIMENSIONS ARE TO THE FACE OF CURB OR BUILDING FOUNDATION UNLESS NOTED OTHERWISE.
- ALL RADII ARE MEASURED TO FACE OF CURB UNLESS NOTED OTHERWISE.
- ALL PROPOSED CURB AND GUTTER SHALL BE B612 UNLESS OTHERWISE NOTED.
- TOPOGRAPHY SHOWN REPRESENTS SITE CONDITIONS PER PLAT OF SURVEY DATED 07-28-08, PREPARED BY W-T LAND SURVEYING, INC. CONTRACTOR SHALL FIELD CHECK EXISTING ELEVATIONS AND CONDITIONS PRIOR TO CONSTRUCTION.
- CONTACT J.U.L.I.E. SIMPLY CALL 811 OR DIAL (1-800-842-0123) PRIOR TO DIGGING TO LOCATE ALL UTILITIES IN THE RIGHT OF WAY.
- CONTRACTOR SHALL EXCAVATE AND VERIFY ALL EXISTING SEWER OR WATER MAIN LOCATIONS, SIZES, CONDITIONS AND ELEVATIONS AT PROPOSED POINTS OF CONNECTION PRIOR TO ANY UNDERGROUND CONSTRUCTION AND NOTIFY THE OWNER OF ANY DISCREPANCIES OR CONFLICTS.

TREES TO BE REMOVED

- 14. AMERICAN ASH - 6"
- 15. AMERICAN ASH - 8"
- 16. ASH - 8"
- 17. ASH - 8"
- 18. SCOTCH PINE - 10"
- 19. SCOTCH PINE - 10"
- 20. ASH - 6"
- 21. ASH - 6"
- 22. AMERICAN ASH - 8"
- 23. ASH - 8"
- 24. ASH - 8"
- 25. DOUGLAS FIR - 6"
- 26. SHRUB
- 27. SHRUB
- 28. SHRUB
- 29. SHRUB
- 30. SHRUB
- 31. SHRUB
- 32. SHRUB
- 33. SCOTCH PINE - 10"

FUTURE TREE REMOVAL

- 1. SUGAR MAPLE - 6"
- 2. SUGAR MAPLE - 8"
- 3. GRABAPPLE - MS
- 4. GRABAPPLE - MS
- 5. BOXELDER - 3"
- 6. AMERICAN ASH - 10"
- 7. AMERICAN ASH - 10"
- 8. ASH - 6"
- 9. ASH - 6"
- 10. AUSTRIAN PINE - 8"
- 11. SUGAR MAPLE - 8"
- 12. AMERICAN ASH - 10"
- 13. AUSTRIAN PINE - 8"
- 14. SUGAR MAPLE - 8"
- 15. BOXELDER - 3"
- 16. SUGAR MAPLE - 6"


REPLACEMENT TREES FOR TREES BEING REMOVED

Botanical Name (Common Name)	Quantity
Acer freemanii 'Autumn Blaze' (Autumn Blaze Red-Silver Maple)	3
Ginkgo biloba 'Magyar' (Magyar Ginkgo)	3
Gymnocladus dioica 'Prairie Titan' (Prairie Titan Kentucky Coffeetree)	3
Pyrus calleryana 'Chanticleer' (Chanticleer Callery Pear)	2
Ulmus x accolade 'Morton' (Morton Accolade Elm)	2


Tree Replacement Requirements (Future and Proposed)

Size of Removed Tree	Required Replacement	Proposed Removals	Proposed Replacements
4" - 12" Caliper	2 - 2.5" Caliper ST or 1 - 4" Caliper ST	25 ST	25 - 4" Caliper ST

ST = Shade Tree

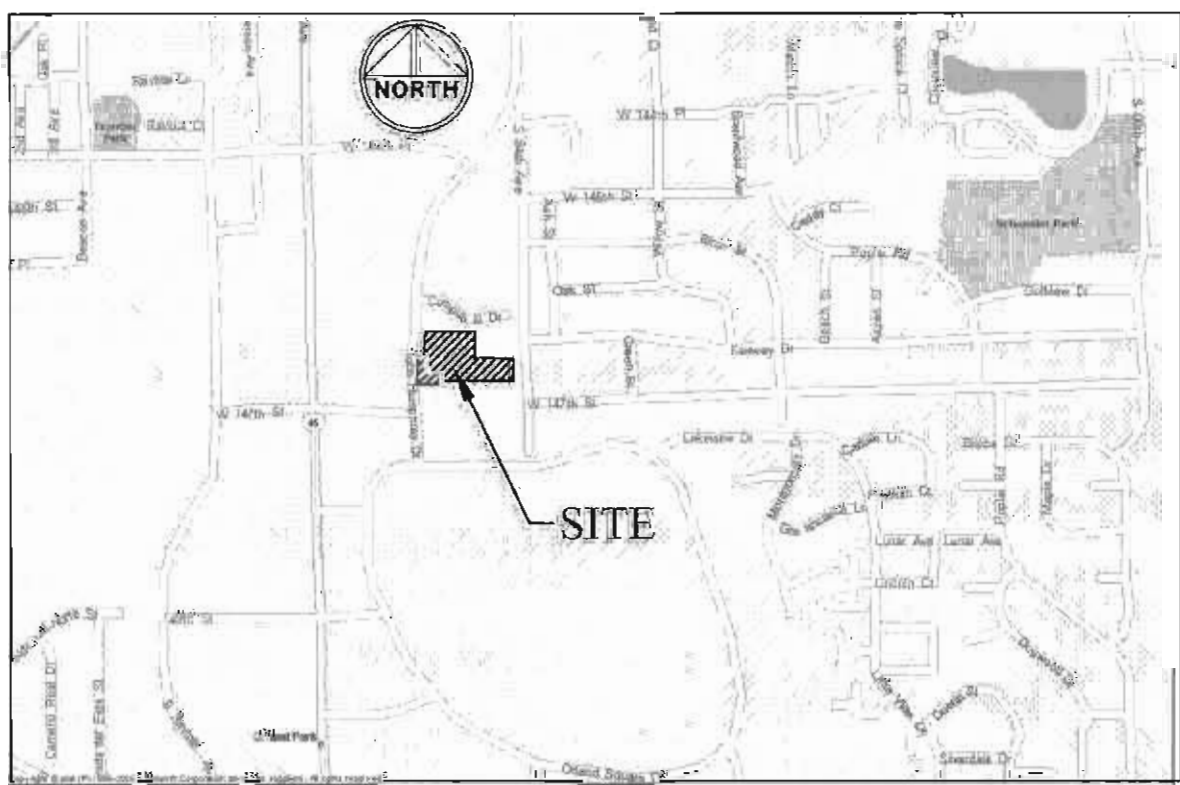

LOCATION MAP

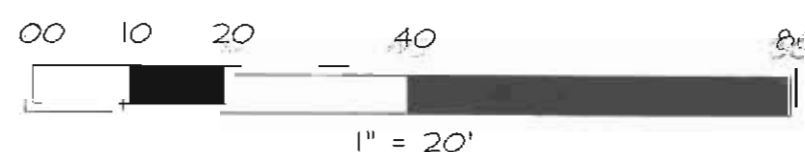

1" = 20'

W-T CIVIL ENGINEERING, LLC
CIVIL AND ARCHITECTURAL ENGINEERS
2675 PRATIN AVENUE
HOFFMAN ESTATES, IL 60196
PH (847) 293-6333 FAX (847) 293-6444
WWW.WTENGINEERING.COM
ILL. LICENSE NO. 084-083492 EXPIRES 4/30/09

DATE: 8-30-08
SCALE: 1" = 20'
DRAWN: VE
CHECK: TOA
JOB: GEOT193
SHEET: C-1

REVISIONS
1. PER VILLAGE COMMENTS
2. PER VILLAGE COMMENTS
3. PER COMMENTS

DATE: 4-30-08
BY: TEP
DATE: 10-22-08
BY: TEP
DATE: 10-24-08
BY: TEP