



"The Professional Approach to Construction"

To: Village of Orland Park Address: 14700 Ravinia Avenue Orland Park, IL 60462	Contact: Mr. Khurshid Hoda Phone: 708-403-6128 Email: khoda@orlandpark.org
Project Name: John Humphrey Complex Improvements Project Address: 14825 West Avenue Orland Park, IL 60462	Ref Number: CG19013 Date: 5/15/2019

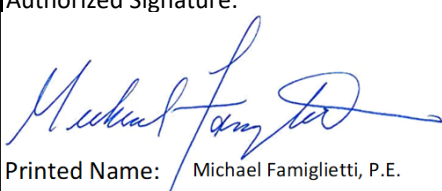
V3 Construction Group proposes to perform the following work as a change order to the existing contract:

PEAT MITIGATION					
Item	Item Description	Quantity	Unit	Unit Price	Total Price
1.0	Excess Material Export Off-Site	7,000	CY	\$30.00	\$210,000.00
2.0	6" Perforated Storm Sewer	3,600	LF	\$18.00	\$64,800.00
3.0	Plaza Asphalt - Mill & Resurface 2" Asphalt	3,510	SY	\$17.80	\$62,478.00
4.0	Irrigation Upgrades	1	LS	\$33,000.00	\$33,000.00
5.0	Additional 6" Perforated Storm Sewer; Field 3	582	LF	\$18.00	\$10,476.00
TOTAL PRICE:					\$380,754.00

ALTERNATES					
Item	Item Description	Quantity	Unit	Unit Price	Total Price
1.0	Humphrey Bike Trail - Mill & Resurface 2" Asphalt	3,260	SY	\$29.50	\$96,170.00
2.0	Humphrey Bike Trail - Mill & Resurface 4" Asphalt	3,260	SY	\$51.20	\$166,912.00

Project Notes:

- 1.0 Repaving of the Humphrey Bike Trail should consider truck traffic on the trail and if a stronger section should be provided. Pricing includes compaction of aggregate base and additional restoration adjacent to the path construction.
- 2.0 Irrigation upgrades include new RPZ, pump and controls; and isolation vales, high-speed heads, additional zones and quick coupler water source.

ACCEPTED: The above prices, specifications and conditions are satisfactory and hereby accepted. Purchaser: Village of Orland Park Signature: _____ Printed Name: _____ Date: _____	CONFIRMED: V3 Construction Group, Ltd. Authorized Signature:  Printed Name: Michael Famiglietti, P.E. Director of Construction
--	--



V3 Construction Group, Ltd.
7325 Janes Avenue
Woodridge, IL 60517
630.724.9200 phone
630.724.9202 fax
www.v3co.com

JOHN HUMPHREY PAVING IMPROVEMENTS EXHIBIT

Notes:

PATH RESTORATION - 3,260 SY
PLAZA PAVEMENT R&R - 3,510 SY

TAF
05-15-2019