



PLANT LIST						
	BOTANICAL NAME	COMMON NAME	SIZE	ROOT	TOTAL	ADDITIONAL NOTES
DECIDUOUS TREES						
AF	ACER X FREEMANII 'AUTUMN BLAZE'	AUTUMN BLAZE MAPLE	3" CAL.	B&B	10	BRANCHED UP 6'
GD	GYMNOCLADUS DIOICA	KENTUCKY COFFEE TREE	3" CAL.	B&B	7	BRANCHED UP 6'
EVERGREEN TREES						
TO	THUJA OCCIDENTALIS 'NIGRA'	DARK GREEN ARBORVITAE	6'H x 5'W		7	
CANOPY TREES						
SG	PRINCETON SENTRY GINKGO	GINKGO 'PRINCETON SENTRY'	-		3	
EVERGREEN SHRUBS						
RA	TAXUS X MEDIA RUNYAN	YEW	36" H	B&B	48	
RG	BUXUS 'GLENCOE'	CHICAGOLAND-BOXWOOD	36" H	CONT	100	
DECIDUOUS SHRUBS						
BM	BLUE MUFFIN	ARROWWOOD VIBURNUM	36" H	B&B	31	
DF	DWARF FOTHERGILLA	FOTHERGILLA GARDENII	36" H	CONT	40	
PERENNIALS AND GROUNDCOVERS						
HC	HEMEROCALLIS 'CHICAGO APACHE'	CHICAGO APACHE DAYLILY	1 GAL	CONT	388	SPACED 10" O.C.
HH	HEMEROCALLIS 'HAPPY RETURNS'	HAPPY RETURNS DAYLILY	1 GAL	CONT	401	SPACED 10" O.C.
GRASS						
KB	POA PRATENSIS	KENTUCKY BLUEGRASS	-	CONT	7129 sf	-

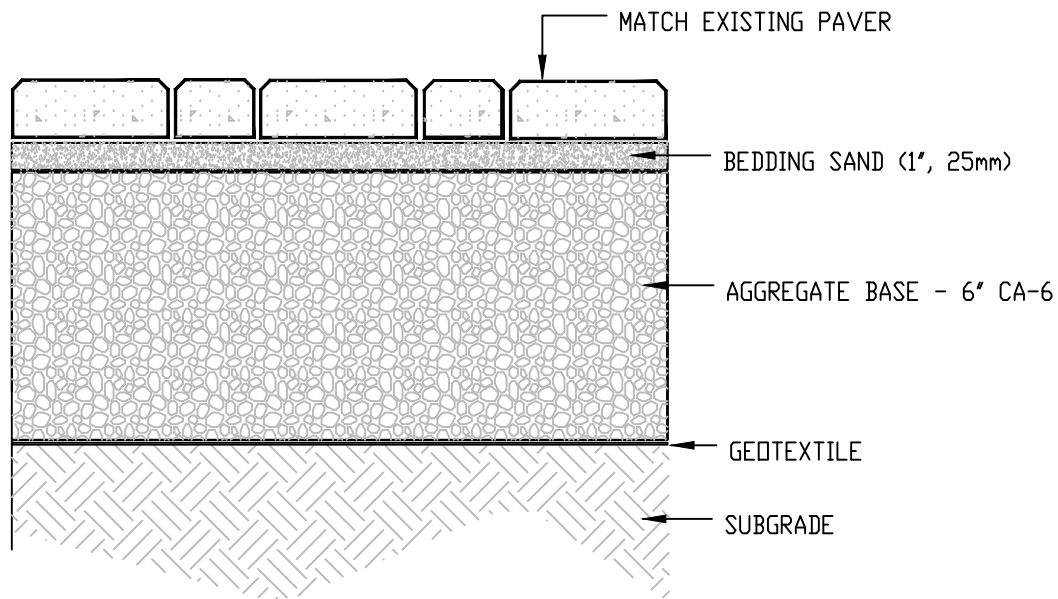


PAVER WALKWAY SECTION DETAIL

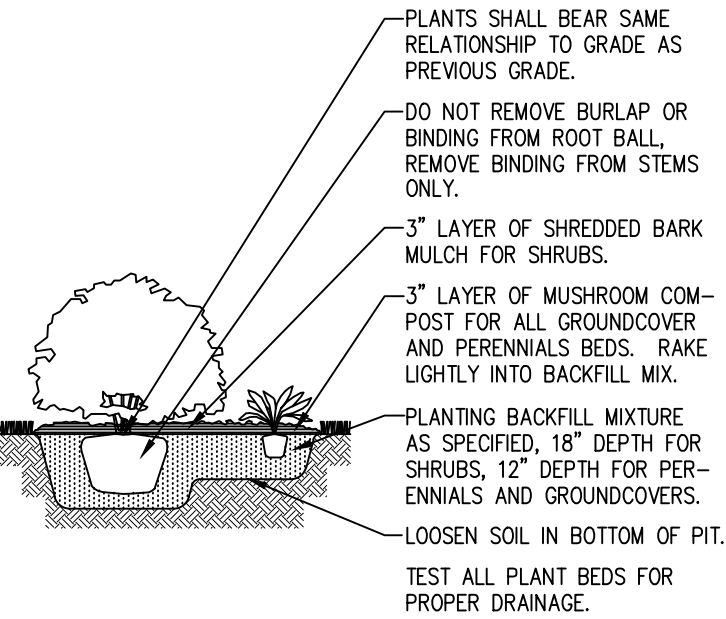

SHRUB, PERENNIAL AND GROUNDCOVER PLANTING

SCALE: N.T.S.

POST CAPS ARE TO BE WELDED TO THE POSTS. POST CAPS, POSTS AND FENCE SECTIONS TO HAVE A BLACK POWDERCOAT FINISH.

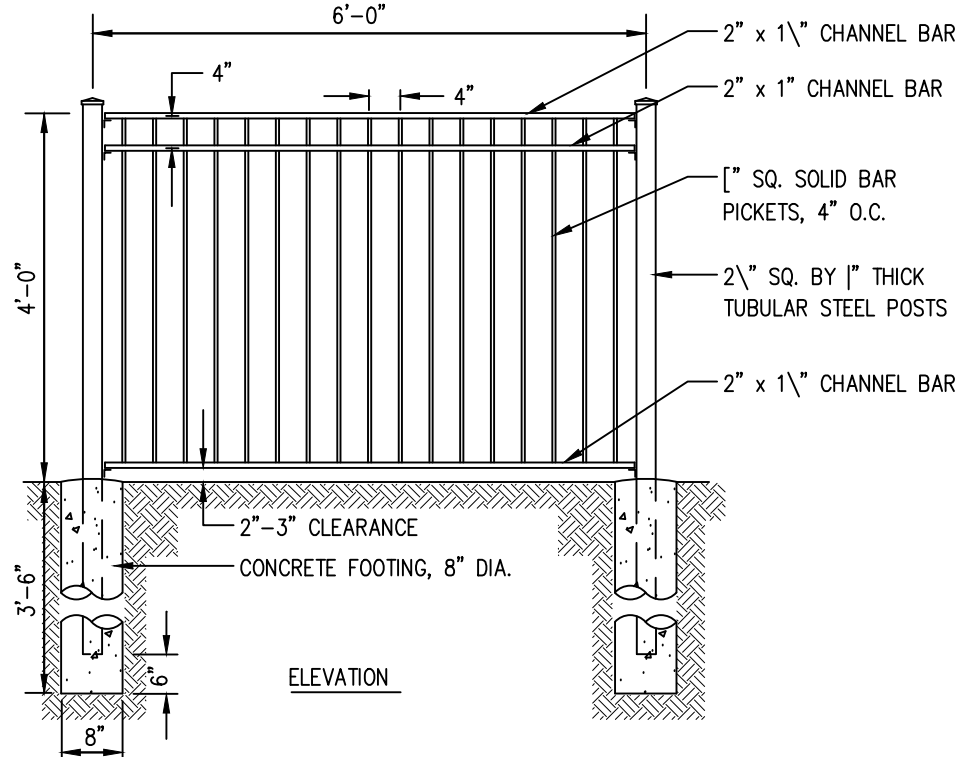

ORNAMENTAL RAILING


SCALE: N.T.S.

IRRIGATION NOTES

1. A PLASTIC, AUTOMATIC, TIMER-ACTIVATED IRRIGATION SYSTEM SHALL BE PROVIDED FOR ALL AREAS DESIGNATED AS SOD, PERENNIALS, AND GROUNDCOVER.
2. PROVIDE ROTARY AND MIST POP-UP SPRAYHEADS AS APPROPRIATE FOR THE PARTICULAR SIZE AND SHAPE OF LAWN OR PLANTING AREA, WITH 60% HEAD TO HEAD SPACING. THERE SHALL BE NO OVER SPRAY ON ROADS OR SIDEWALKS.
3. PROVIDE BACKFLOW PREVENTERS, BOOSTER PUMPS AND IRRIGATION CONTROLLERS LOCATED INSIDE THE BUILDING.
4. SIZE BOOSTER PUMP, IF REQUIRED, TO PROVIDE 50 GPM AND 40 PSI AT THE SPRINKLER HEADS.
5. PROVIDE SLEEVING AS NECESSARY AND COORDINATE SLEEVE INSTALLATION WITH THE GENERAL CONTRACTOR
6. ALL IRRIGATION EQUIPMENT SHALL BE BY TORO, RAINBIRD, NELSON OR APPROVED EQUAL.

PROPOSED LANDSCAPE PLAN


SCALE: 1" = 20'-0"

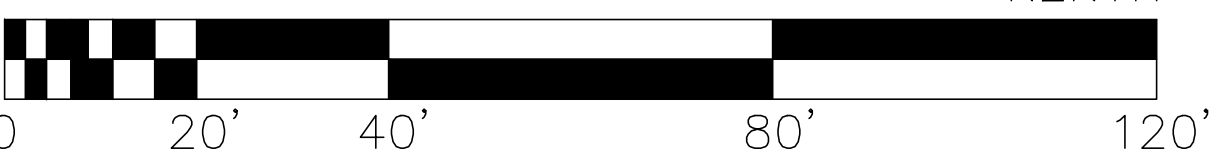

GENERAL NOTES

1. ALL PLANT SPECIES AND SIZES ARE SUBJECT TO AVAILABILITY AT TIME OF INSTALLATION. IF SUBSTITUTIONS BECOME NECESSARY, ALL REQUESTS SHALL BE SUBMITTED TO THE LANDSCAPE ARCHITECT FOR OWNER AND CITY APPROVAL.
2. THE QUANTITIES LISTED IN THE PLANT LIST ARE FOR REVIEW PURPOSES ONLY. IT IS THE CONTRACTOR'S RESPONSIBILITY TO THOROUGHLY REVIEW THE PLANS AND PREPARE THEIR OWN QUANTITY TAKE-OFFS. PLANT TOTALS SHOWN ON THE PLANS SUPERSEDE ANY QUANTITIES SHOWN IN THE PLANT LIST.
3. CALL THE BUREAU OF FORESTRY FOR PARKWAY TREE REMOVAL, AND 10 DAYS PRIOR TO PLANTING IN THE PUBLIC WAY, (312) 747-2098.
4. 3" OF HARDWOOD MULCH WILL BE INSTALLED AND MAINTAINED IN ALL LANDSCAPE BEDS. "COLORIZED MULCH IS NOT PERMITTED"
5. WALKWAY PAVERS (COLOR, MATERIALS, PATTERN) TO MATCH EXISTING PAVERS BY VILLAGE OF ORLAND PARK

LOCATE ALL UNDERGROUND UTILITIES PRIOR TO DIGGING. TREE PIT WIDTH TO BE THREE TIMES THE WIDTH OF THE ROOT BALL. TEST TREE PIT FOR DRAINAGE PRIOR TO INSTALLING TREE. PRUNE OFF ALL DEAD, BROKEN OR SCARRED BRANCHES, AND SHAPE PRUNE AS DIRECTED BY THE LANDSCAPE ARCHITECT. LOCATE ROOT FLARE IN ROOT BALL AND SET TREE HEIGHT SO THAT ROOT FLARE IS FLUSH WITH FINISH GRADE. REMOVE ALL BASKET WIRE, TWINE AND BURLAP FROM THE TOP HALF OF THE ROOT BALL. WATER IN THE PLANTING MIX THOROUGHLY, WHILE KEEPING THE TREE PLUMB. STRAIGHTEN TREE IF SETTLING OCCURS.

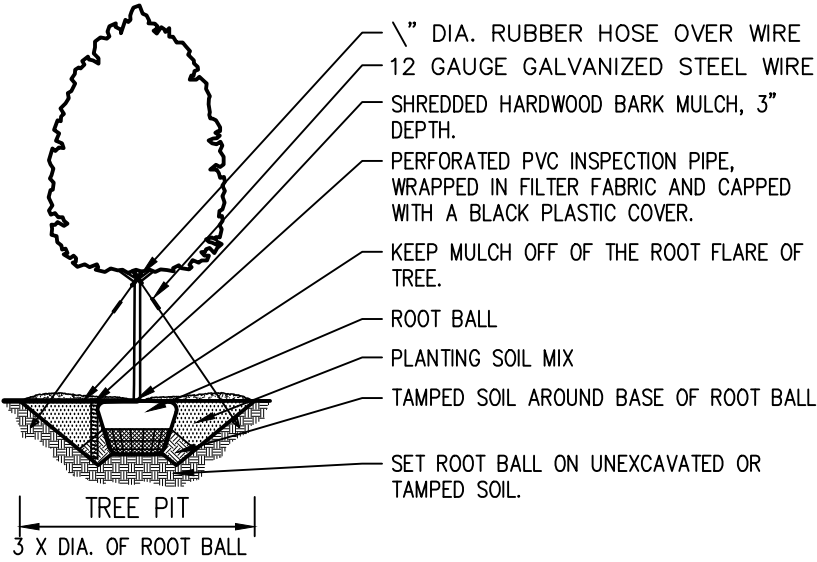

DECIDUOUS TREE PLANTING - SINGLE STEM

SCALE: N.T.S.

BOARD APPROVED

Case No: 2017-0498
Date: 07/17/2017
W/Conditions: ☐
W/Out Conditions: ☒

VILLAGE OF ORLAND PARK