


20


TELCO. PED.



PERENNIAL PLANTING DETAIL
NOT TO SCALE. USE ONLY ZONE HARDY PLANT MATERIAL.

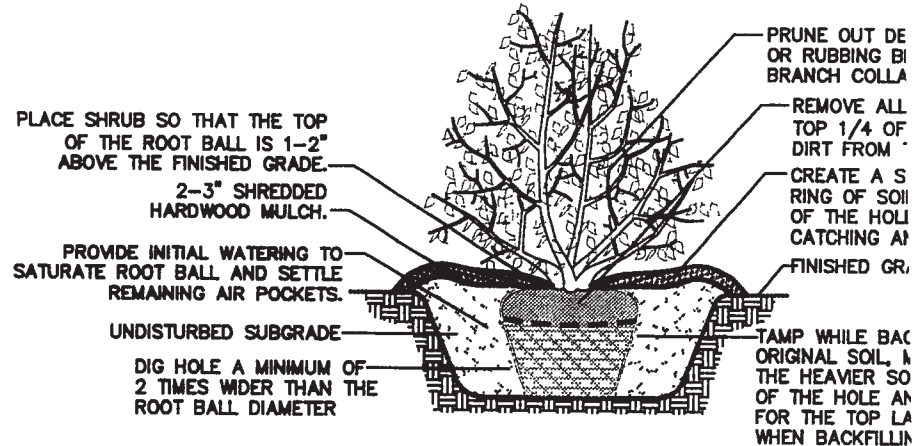

SHRUB PLANTING DETAIL

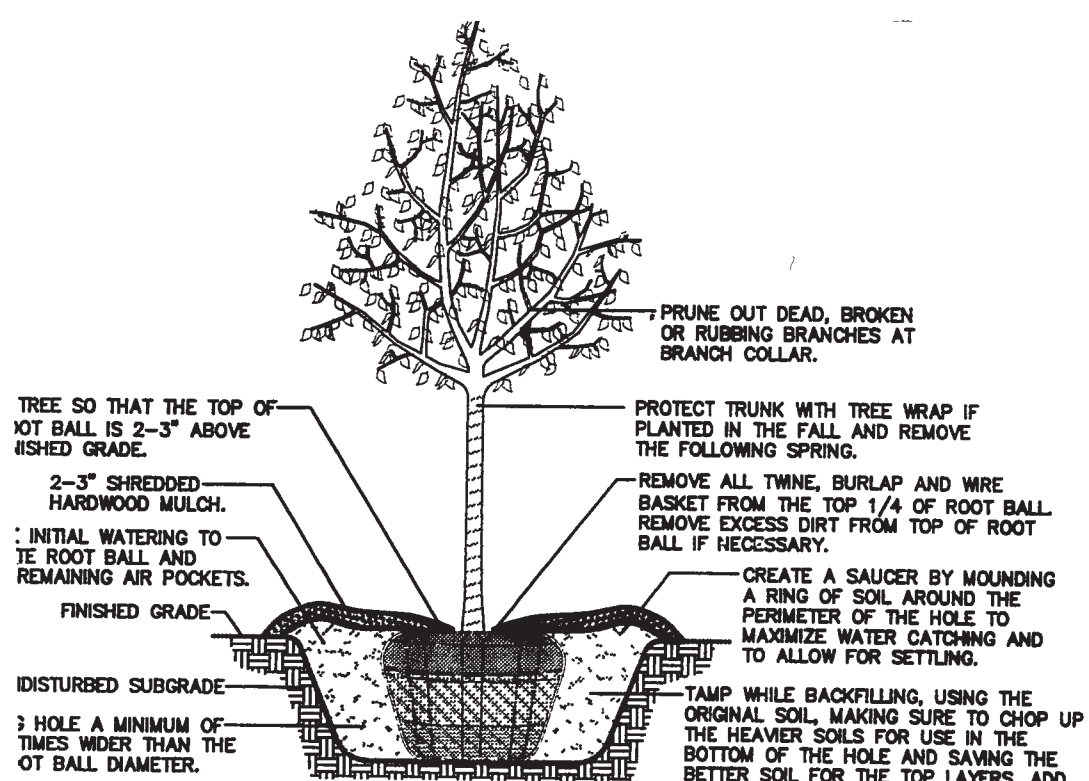

TREE PLANTING DETAIL
NOT TO SCALE. USE ONLY ZONE HARDY PLANT MATERIAL.

PLANT TABLE

Quantity	Scientific Name	Common Name	Code Name	Planting Size
91	Allium abidum millenium	Ornamental Onion	AM	1Gal
4	Acer rubrum	Armstrong Maple	ARA	21/2"
10	Buxus	Green Velvet	BGV	2-Gal
9	Calamagrostis acutiflora	Feather Reed Grass	CAR	3-GAL
28	Diervilla rivularis	Kodiak Black	DKB	5-Gal
15	Hemerocallis	Early Bird Cardinal	HEC	1-Gal
16	Hydrangea H paniculata	Quickfire	HPQ	7-Gal
20	Hydrangea paniculata	BoBo	HPB	5-Gal
15	Hypericum kalmianum Ames	St Johns Wort	HKA	5-Gal
29	Juniperus chinensis	Daub's Frost	JCD	3-Gal
3	Malus	Sargentina Crab	MS	21/2"
8	Miscanthus sinensis	Maiden Grass	MSM	2-Gal
6	Physocarpus nnebark	Summer Wine	PNS	5-Gal
12	Pennisetum hamilem	Dwarf Fountain Grass	PHD	2-Gal
2	Picea abies	Norway Spruce	PAN	8"BB
4	Picea abies	Cleveland Select	PYCAC	21/2"
18	Rhus aromatica	Gro-Low Sumac	RAG	5-Gal
15	Ribes alpinum	Green Mound	RAM	5-Gal
23	Rosa	Drift Rose	RDR	2-Gal
25	Stachi monnieri	Hummelo	SMH	1-Gal
75	Stachi officinalis	Densiflorus	STD	5-Gal
15	Spirea betulifolia	Glow Girl Birchleaf	SBG	5-Gal
35	Taxus media	Densiform Yew	TMD	24"BB
26	Taxus	Hicks Yew	TMH	24"BB
16	Viburnum dentatum	Chicago Lustre	VDC	4"BB
33	Weigela	Spill Wine	WFW	5Gal

PROJECT:

JOE RIZZA

Orland Park LINCOLN

Joe Rizza Lincoln
8130 W. 159th
Orland Park, IL 60462

ARCHITECT:



505 Lake Cook Road, Suite 350
Deerfield, IL 60015

Tel: 847-571-3814
design@simon-arch.com

CIVIL:

MeritCorp Group, LLC

Engineering/Planning/Surveying

3697 Darlene Court
Aurora, IL 60504

Tel: 630-723-6870
Attn: Todd Roberts

LANDSCAPE:

DAHL LANDSCAPING

14960 W. 159TH STREET
LOCKPORT, IL 60441

Tel: 815-838-7811
Attn: Don Dahl

Landscape Notes

- The Landscape Contractor will be responsible for installing all material and plants shown on the landscape plan.
- All nursery stock will be well branched, healthy, full, pre-inoculated, and fertilized. Deciduous trees will be free of fresh scars. Trunks will be wrapped, if necessary, to prevent sun scald and insect damage. The landscaper will remove said wrap at the proper time as a part of his contract.
- All nursery stock will be guaranteed for one year from date of final inspection.
- Clean viable earth will be provided and graded by the General Contractor up to 6 inches below finished grade in grass areas and a minimum of 18 inches in planting areas.
- Soil will be amended with 25% sphagnum peatmoss, 5% manure, 5% humus, and 65% pulverized soil for all annual and perennial beds.
- Mulch will be three inches thick shredded hardwood bark in plant beds and tree rings. Mulch shall not contain any farm or other wastes.
- A chemical weed preventative barrier will be applied in all non-grass areas.
- A natural spaded edge will separate plant beds from grass areas.
- All sod areas noted on plan shall be sodded.
- J.U.L.I.E. will be contacted before any type of work is done at this location.

NORTH

SITE DETAIL
SCALE: 10 FT

